CITY OF SIMPSONVILLE: CITY COUNCIL COMMITTEE OF THE WHOLE
AGENDA

Council Chambers, Simpsonville City Hall | Nov. 25, 2025| 6 p.m.

1. **CALL TO ORDER**
   Presiding Officer: Mayor Paul Shewmaker

2. **ROLL CALL**
   Recorder: Ashley Clark, Clerk of Council

3. **PLEDGE OF ALLEGIANCE**

4. **APPROVAL OF MINUTES:**
   October 28, 2025

5. **CITIZEN COMMENTS**
   (Code of Ordinances: *Chapter 2. Article II. Division 2. Sec. 2-69.b.1)* Citizens of the City or others who have standing in the City, such as business owners, shall be entitled to appear before council at regular meetings. Such persons may speak regarding matters that are within the jurisdiction of the City, except for personnel matters. At least 10 minutes prior to the time the meeting is scheduled to commence, such person wishing to appear before council must place his or her name, address, and topic to be addressed on the public comments sign-up list maintained by the City Clerk. Individual comments shall be limited to three minutes.

6. **CITY ADMINISTRATOR'S REPORT**
   Tee Coker, City Administrator

7. **BUSINESS**
   - **A.** Z-2025-02, Proposed Rezoning of Properties Located at 118 & 124 NE Main Street
     Jon Derby, Planning Director
   - **B.** Resolution R-2025-05, Textile Rehabilitation Certification, Burdette Textile Factory
     Jon Derby, Planning Director
   - **C.** Proposed Resolution to Authorize Conveyance of Garrett Property to the City of Simpsonville
     Tee Coker, City Administrator
   - **D.** Proposed Ordinance to Approve a Trespass Enforcement Authorization Program
     Tee Coker, City Administrator
   - **E.** Nominations & Selections of Council Representatives to CCNB Amphitheatre Selection Committee
   - **F.** Nomination & Selection of Council Representative to the Simpsonville Chamber of Commerce Board

8. **ADJOURNMENT**

PLEASE NOTE CITY COUNCIL MEETING AGENDAS ARE ACCURATE AS OF THE FRIDAY PRIOR TO THE MEETING BUT IS SUBJECT TO CHANGE UP TO TWENTY-FOUR (24) HOURS PRIOR TO THE MEETING. PLEASE CONTACT SIMPSONVILLE CITY HALL THE DAY OF THE MEETING FOR AN UP-TO-DATE AGENDA AT 864-967-9526.

City of Simpsonville: City Council Committee of the Whole
MINUTES

Council Chambers, Simpsonville City Hall | Date: Oct. 28, 2025 | 6 p.m.

1. **CALL TO ORDER**
   Presiding Officer: Paul Shewmaker, Mayor

2. **ROLL CALL**

Councilmember	Present	Absent
Ward 1 – Chad O'Rear	✓	
Ward 2 – Aaron Rupe	✓	
Ward 3 – Shannon Williams	✓	
Ward 4 – Sherry Roche	✓	
Ward 5 – Tim Pinkerton	✓	
Ward 6 – Lou Hutchings	✓	
Mayor Paul Shewmaker	✓	

3. **PLEDGE OF ALLEGIANCE**

4. **APPROVAL OF MINUTES**
   Minutes from the September 23, 2025 Committee of the Whole were approved as written.

5. **CITIZEN COMMENTS**
   Brianne Shaffer expressed concerns about the increasing population of feral cats in the community. Ms. Shaffer expressed her willingness to work together with city officials to develop and implement strategies aimed at addressing these concerns.

   Joyce Todd voiced concerns regarding the loud music emanating from the amphitheater which has been affecting the quality of life for residents in the area.

6. **STAFF REPORTS PRESENTED**
   Community Relations- Justin Campbell, Community Relations Specialist, presented on events happening in the city.

   Planning Report- Jon Derby, Planning Director, presented information on upcoming annexations and ordinances.

   Finance Dept.- Maria Tooley, Finance Director, presented a monthly financial report.

   Administrative Dept.- Tee Coker, City Administrator, presented a City Administrator report.

7. **BUSINESS ITEMS**
   A. O-2025-11, Amend Code of Ordinances Sec. 8-41 and 8-42, Technical Codes

Motion by Councilmember Roche with a second by Councilmember Hutchings to approve O-2025-11, Amend Code of Ordinances Sec. 8-41 and 8-42, Technical Codes and move to the next Business Meeting. Y-7 N-0. Motion carried.

B. AXZ-2025-03, Proposed Annexation of Property at 320 Tearose Lane
Motion by Councilmember Roche with a second by Councilmember Hutchings to approve AXZ-2025-03, Proposed Annexation of Property at 320 Tearose Lane. Y-7 N-0. Motion carried.

C. AXZ-2025-04, Proposed Annexation of Property on W. Georgia Road
Motion by Councilmember Roche with a second by Councilmember Williams to approve AXZ-2025-04, Proposed Annexation of Property on W. Georgia Road. Y-7 N-0. Motion carried.

D. Amend Code of Ordinances Sec. 16-4, Wards and Boundaries
Motion by Councilmember Pinkerton with a second by Councilmember Roche to approve Amending Code of Ordinances Sec. 16-4, Wards and Boundaries. Y-7 N-0. Motion carried.

8. EXECUTIVE SESSION

Motion by Councilmember Roche with a second by Councilmember Rupe to go into executive session to discuss a contractual arrangement pertaining to Heritage Park. Y-7 N-0. Motion carried.

Upon coming out of executive session the following vote was taken.

Motion by Councilmember Pinkerton with a second by Councilmember Rupe to terminate management of the CCNB Amphitheater. Y-7 N-0. Motion carried.

9. ADJOURNMENT

Time of Adjournment: 8:42PM

Simpsonville Planning Department
Planning & Economic Development Director
Jon Derby

AGENDA ITEM

To: City Council - Committee of the Whole

Meeting Date: 11/25/2025

Agenda Item: Proposed rezoning to ID

Subject: Z-2025-02 Proposed rezoning to property located at 118 & 124 NE Main St. Tax Map# 0315.00.02.004.00 & 0315.00.02.001.00

Applicant/Owner: Blue Ridge Land Holdings, LLC

Attachments: ☒Proposed Ordinance ☒Proposed Concept Plan ☒Proposed Statement of Intent ☒Applicant Material ☐Consent Letter ☒Locations Maps ☒Development Agreement ☒Traffic Study ☒Renderings

Existing Zoning	Requested Zoning	Surrounding Zoning	Extraterritorial Land Use	Size of Property
B-U, Business Urban	ID	B-U & B-G	Town Center Mixed-Use	2.44 +/- Acres

Brief Description of request

The City of Simpsonville has received a signed petition requesting the rezoning of parcels of land pursuant to Section 7.5 of the Simpsonville Zoning Ordinance. This petition is for two parcels located at 118 & 124 NE Main St (tax map # 0315.00.02.004.00 & 315.00.02.001.00)

The applicant has requested that these two parcels be rezoned from B-U, Business Urban to ID (Innovative Development). The developer is looking to create a mixed-use development of multifamily and commercial retail within our city center.

Z-2025-02

Location & Site Description

These parcels contain the prior City Hall site and the vacant AAA/Suntrust building, with surface parking on the rear portions. These parcels will be combined as one tax parcel in the future, fronting NE Main St., E. College St., & Hedge St.

Statement of Intent

The Statement of Intent details a three-story, multifamily, mixed-use project, with surfacing parking on the eastern side near Hedge St. The development will consist of a maximum 80 residential units comprised of studio, one, two, & three-bedroom units. 18,000 square feet of commercial space will be provided on the main level, fronting NE Main St. & E. College St. Access points will be installed on E. College St. and on Hedge St. 144 surface parking spaces are being provided, hidden from Main St, behind the structure. Coworking spaces and flexible office units will be integrated into the project. The development will incorporate public art and streetscape elements to coincide with the city's downtown streetscape project. The development is proposing the use of EV (Electric Vehicle) charging stations as well as solar power concepts to promote renewable energy options.

Comprehensive Plan

The City's Comprehensive Plan identifies this area as Town Center Mixed Use. This designation applies only in and around Downtown Simpsonville. It emphasizes the urban character and the mix and intensity of activities uniquely suited to the town center. This designation is intended to permit a true mix of all uses, except industrial, at the highest levels of scale and density within the City and with unique development standards tailored to the urban character of Downtown. It is particularly important to move the Downtown towards becoming a center of activity not only in the day, but also at night and during weekends, by promoting a mix of commercial, entertainment, residential, and other uses. To help achieve this goal, creative forms of housing, such as lofts and residential units in second-stories above ground level retail, should be encouraged....

Zoning District

Per Section 2.11.1 of the Simpsonville Zoning Ordinance: "the ID, Innovative Development District is established to provide flexibility in the planning and construction of development projects in accordance with an approved plan. In return for greater flexibility in site design requirements, innovative development are expected to demonstrate exceptional quality community designs that:

A. Preserve critical environmental resources;
B. Provide above-average open space amenities;
C. Demonstrate innovative and creative site planning techniques that improve upon the layout and design of buildings, open space and circulation that would otherwise be achieved by the standards of other allowable zoning districts;
D. Assure compatibility with surrounding land uses and neighborhood character; and
E. Provide greater efficiency in the layout and provision of roads, utilities, and other infrastructure."

Site Improvements

The current overhead transmission lines, running in front of the old AAA/Suntrust building will be placed underground to allow for maximum use of the site. This will allow for this project to have a 0' build line, along Main St and E. College St. Current vehicle access points along Main St will be removed, allowing for more fluid traffic movement for this stretch of Main St., while encouraging more walkability along the streetscape.

Public Hearing Proceeding

A public hearing regarding this petition was conducted on November 6th, 2025, before the body of the Simpsonville Planning Commission. There was only one public comment, in favor of the request with recommendation of color and pattern design.

Planning Commission Review

The Simpsonville Planning Commission reviewed the request to rezone the property at their November 6th, 2025, meeting. The Commission discussed the ingress/egress along with the proposed unit counts. The topic of parking was discussed, and their Traffic Engineer was available to answer other questions. By a vote of 4-0, the Planning Commission recommends approval of Z-2025-02.

Staff Comments

A traffic study has been conducted by the developers to determine potential impact from the proposed project. This project will be the first ground-up construction in the commercial core of the city in several years. The proposed design of the project will incorporate the materials and colors accustomed to our city theme, while introducing fresh, innovative design elements that breathe new life into the area.

STAFF RECOMMENDATION: Approval of the requested rezoning set forth in Ordinance Z-2025-02.

ORDINANCE NO. Z-2025-02

AN ORDINANCE TO AMEND THE ZONING MAP OF THE CITY OF SIMPSONVILLE, SOUTH CAROLINA OF LAND AT 118 NE MAIN STREET, & 124 NE MAIN STREET., TAX MAP# 0315.00-02-004.00, & 0315.00-02-001.00 OWNED BY BLUE RIDGE LAND HOLDINGS, LLC

WHEREAS, the South Carolina Code of Laws of 1976, as amended, Chapter 23 Title 5 provides for the process for municipalities to rezone property; and

WHEREAS, the City of Simpsonville has enacted a Zoning Ordinance which governs amendments to the Official Zoning Map; and

WHEREAS, the hereinafter described property was advertised on October 19, 2025, and the City of Simpsonville Planning Commission held a public hearing on November 6, 2025.

NOW, THEREFORE, BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF SIMPSONVILLE THAT:

1. **ZONING CLASSIFICATION:** The Official Zoning Map of the City of Simpsonville is hereby amended to assign Tax Map # 0315.00-02-004.00 depicted in the deed contained in Book 2759 on Page 834, & Tax Map# 0315.00-02-001.00 depicted in the deed contained in Book 2623 on Page 2891, of the official records of Greenville County Register of Deeds and as depicted in Exhibit "A" & "B", attached hereto, the zoning classification of I-D, Innovative Development District.

2. **PROVISION SEVERAGE:** It is hereby declared to be the intention of the governing authority of this municipality that the sections, subjections, paragraphes, sentences, clauses and phrases are severable, and if any phrase, clause, sentence, paragraph, subsection, or section of this Ordinance shall be declared invalid or unconstitutional by the valid judgment or decree of any court or competent jurisdiction, such invalidity or unconstitutionality shall not effect any of the remaining portions of this Ordinance so held to be invalid.

3. **ORDINANCE SUPERSEDES PREVIOUS INCONSISTENT LEGISLATION:** All Ordinances or parts of Ordinances inconsistent herewith, which may have heretofore been passed by the Simpsonville City Council, are hereby repealed.

(SIGNATURE PAGE FOLLOWS)

This Ordinance shall be effective upon second and final reading by the City Council.

SIGNATURE OF MAYOR:

_____
Paul Shewmaker

ATTEST:

_____
Ashley Clark
City Clerk

APPROVED AS TO FORM:

_____
Daniel Hughes
City Attorney

First Reading: December 9, 2025
Second Reading: January 13, 2025

EXHIBIT "A"

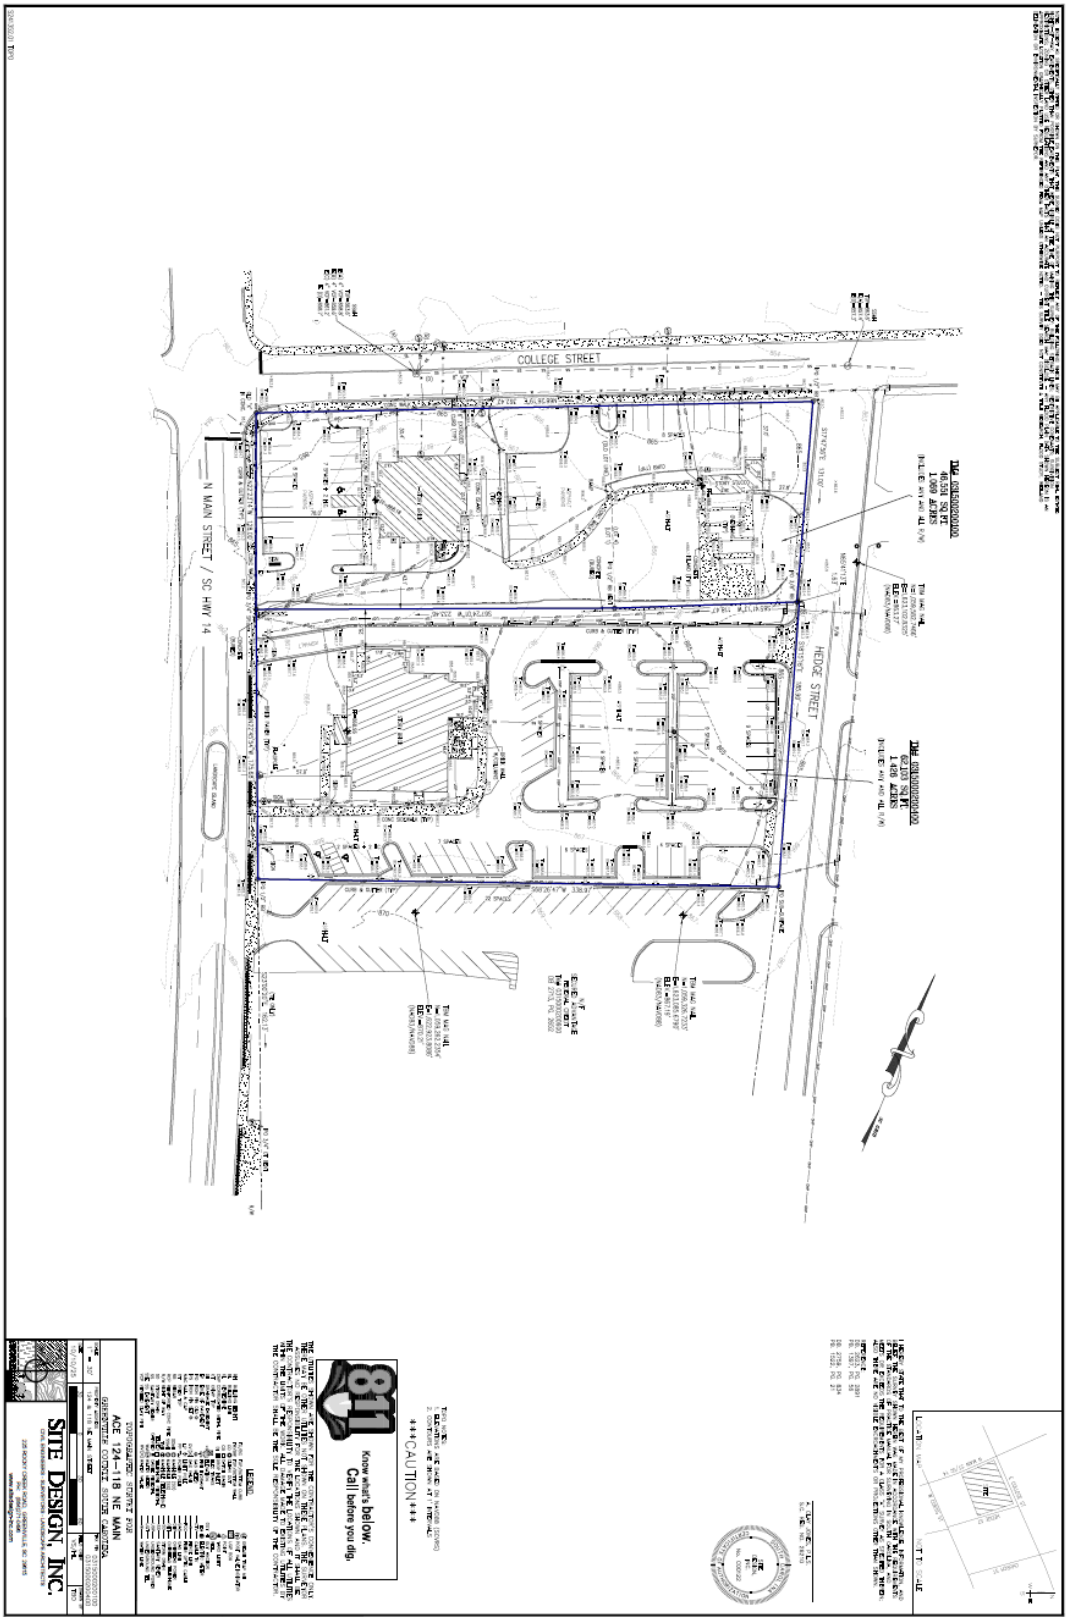

COLLEGE STREET
N MAIN STREET / SC HWY 14
HEDGE STREET
811
Know what's below.
Call before you dig.
CAUTION
SITE DESIGN, INC.

EXHIBIT B

Z-2025-02 118 & 124 NE. Main St Rezoning to I-D



October 30, 2025

1:1,600

0 75 150 300 ft

0 20 40 80 m

Legend

Subject Property

Parcels

Greenville County GIS Division, Greenville, South Carolina, Greenville County GIS Division, Greenville County, South Carolina GIS Division



SITE INFORMATION:
- TM#: 0315000200100, 0315000200400
- SIZE: ±2.52 ACRES
- EXISTING ZONING: B-U (BUSINESS - URBAN)
- PROPOSED ZONING: ID (INNOVATIVE DEVELOPMENT)
- SETBACKS: -FRONT = NONE
  -SIDE = NONE
  -REAR = NONE
- PARKING REQUIREMENTS:
  - STALL WIDTH
    90-DEGREE STALL= 9-FT X 18FT 24-FT AISLE
  - PROVIDED PARKING COUNT: 144 SPACES
  - PASSENGER: 139 SPACES
  - ADA: 5 SPACES
- PROPOSED BUILDING:
- MIXED USE DEVELOPMENT
- 3 STORIES

PROPOSED BUILDING INFORMATION:

	RESIDENTIAL	AMENITY	RETAIL	COMMERCIAL	TOTAL
LEVEL 1	13,994	6,147	8,991	3,823	32,955
LEVEL 2	32,955				32,955
LEVEL 3	32,955				32,955
TOTAL	79,904	6,147	8,991	3,823	98,865

RESIDENTIAL UNIT COUNT: 73

NOTE: BOUNDARIES, TOPOGRAPHY, WETLANDS, AND STREAMS LOCATIONS ARE APPROXIMATE BASED OFF GEOGRAPHIC INFORMATION SYSTEMS (GIS). A BOUNDARY AND TOPOGRAPHIC SURVEY ALONG WITH A WETLAND DELINEATION SHOULD BE PERFORMED TO DETERMINE ACCURATE BOUNDARY, TOPOGRAPHIC, AND WETLAND LOCATIONS.

Documents prepared or furnished by Alliance Consulting Engineers, Inc. are instruments of service, and Alliance Consulting Engineers, Inc. retains an ownership and property interest (including the copyright and the right of reuse) in such documents, whether or not the project is completed.

50 25 0 50 150

(IN FEET)

Project No.: 25195-0023
October 9, 2025

±99,000-SF Mixed-Use Development Located Along North East Main Street City of Simpsonville Greenville County, South Carolina

Blue Ridge Land Holdings, LLC

ALLIANCE CONSULTING ENGINEERS

Prepared by Alliance Consulting Engineers, Inc.

Burdette North

Statement of Intent for Innovative Development (ID) Rezoning

Project Name: Burdette North
Location: Southeast corner of NE Main Street and E. College Street, Simpsonville, SC
Parcels: Tax Map #0315000200400 (+/- 1.09-Acres) and #0315000200400 (+/- 1.43-Acres)
Current Zoning: Business-Urban
Proposed Zoning: Innovative Development (ID)
Developer: Blue Ridge Land Holdings, LLC
Architect: SHLTR Architects
Civil/Site Design: Alliance Consulting Engineers, Inc.
Traffic Impact Analysis: Impact Designs, Inc.
Surveying: Site Design, Inc.

Project Overview

Burdette North is proposed as a vibrant, mixed-use redevelopment designed to bring new life and economic energy to the north end of Downtown Simpsonville. The project will include up to **80 residential units** (a mix of studios, one-bedroom, and two-bedroom apartments) and +/-**18,000 square feet of commercial space** dedicated to retail, restaurant, amenities, and coworking uses. The building will be a total of three (3) stories.

As shown on the included Conceptual Site Plan, the development will include **144 surface parking spaces**. Both existing structures on the site will be demolished to make way for this new, cohesive urban development that aligns with the City's vision for a more walkable, connected, and active downtown district.

Innovative Features

Burdette North exemplifies the goals of the Innovative Development (ID) zoning by introducing design and sustainability features that are new to the City of Simpsonville's Central Business District and Business Urban (B-U) zones. The project will include at least two (2) of the following innovative components:

- **Coworking Space:** Dedicated coworking suites and flexible office amenities will serve local entrepreneurs, small businesses, and remote professionals, providing modern workspace solutions within a walkable downtown setting.

© 2025 by Alliance Consulting Engineers, Inc. All information contained in this document is the property of Alliance Consulting Engineers, Inc. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior explicit written permission of Alliance Consulting Engineers, Inc.

- **Public Art:** The project will feature integrated public art installations—such as murals, sculptures, or artist-designed streetscape elements—that contribute to placemaking and enhance the visual identity of NE Main and College Streets.
- **Pervious Pavement:** Portions of the parking and pedestrian areas will utilize pervious pavement systems to reduce stormwater runoff, promote infiltration, and improve site sustainability.
- **EV Charging Stations:** Electric Vehicle (EV) charging infrastructure will be provided to support the growing demand for sustainable transportation options.
- **Solar Power:** Where feasible, solar panels will be integrated to supplement building energy use and demonstrate commitment to renewable energy innovation.

These innovative elements will provide a unique character and forward-thinking design approach, establishing Burdette North as a model for sustainable, mixed-use redevelopment in the city.

Community Impact and Vision

Burdette North will bring a new level of vibrancy and activity to NE Main Street and College Street, reinforcing the urban fabric of Downtown Simpsonville. The project's blend of residential and commercial uses will:

- Activate the public-facing street level with restaurants, retail, and coworking spaces
- Provide diverse housing options that appeal to young professionals, empty nesters, retirees and small households
- Encourage walkability and connectivity with nearby businesses and public amenities
- Support the continued revitalization of the downtown corridor through attractive design and public engagement features

As the second major downtown investment by Blue Ridge Land Holdings, LLC, following the successful redevelopment of Burdette Central, this project continues the developer's commitment to high-quality, community-oriented growth in the City of Simpsonville. Working with SHLTR Architects and Alliance Consulting Engineers, Inc., the design team will deliver a well-integrated, visually appealing, and environmentally conscious project that enhances both the aesthetic and economic vitality of the city.

Integrating residential uses into the City of Simpsonville's downtown core brings vitality, economic stability, and a stronger sense of community to the urban environment. Residents living downtown provide support to local businesses, restaurants, and cultural venues, helping sustain activity beyond typical business hours and creating a lively, 24-hour district.

© 2025 by Alliance Consulting Engineers, Inc. All information contained in this document is the property of Alliance Consulting Engineers, I
All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior explicit written permission of Alliance Consulting Engineers, Inc.

This mix of living, working, and leisure spaces reduces reliance on cars, encourages walking, and fosters a more sustainable urban form. Moreover, downtown living attracts a diverse range of people - young professionals, small families, and retirees alike—who contribute to the social and cultural vibrancy of the area. By combining residential and commercial space, this project will be dynamic, safe, and engaging to the City of Simpsonville's downtown, and serve as the center of urban life.

Property Access & Traffic Flow Coordination

Vehicle access to Burdette North will be on E. College and Hedge Streets (one ingress/egress on each street). The project team has designed internal circulation to align with the City's soon-to-be implemented counterclockwise one-way circulation pattern. The Traffic Impact Analysis has accounted for the City's new traffic pattern. The plan is to have Burdette North's construction occurring simultaneously with Simpsonville's Downtown Revitalization and Traffic Realignment strategy and construction. Existing curb cuts along NE Main Street and East College Street will be eliminated, along with one curb cut on Hedge Street.

Eliminating multiple vehicle access points with this development offers several important benefits for safety, efficiency, and overall site design. By consolidating access to two (2) well-designed entrances/exits along E. College Street and Hedge Street, traffic movement becomes more predictable and easier to manage, reducing potential conflict points between vehicles, pedestrians, and cyclists. Fewer access points also enhance roadway safety by minimizing turning movements and improving sight distances along adjacent streets. Overall, limiting vehicle access points contributes to a safer, more attractive, and functionally efficient development.

Utilities

This project will be served by Greenville Water, City of Simpsonville Sewer, and Duke Energy. Duke Energy will locate transformers on the development site. Existing utilities and connections will be used wherever possible. The Development Agreement between Blue Ridge Holdings, LLC and the City of Simpsonville states that the City will use its best efforts to relocate utilities in the public right-of-way, creating a cleaner, less-cluttered aesthetic.

© 2025 by Alliance Consulting Engineers, Inc. All information contained in this document is the property of Alliance Consulting Engineers, I
All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior explicit written permission of Alliance Consulting Engineers, Inc.

Stormwater

Because the site consists of mostly impervious surface, major stormwater infrastructure improvements are not anticipated being needed, as this project assumes zero increase in runoff. If required through Detailed Design, additional Stormwater Management will be coordinated and compliant with Greenville County under its Stormwater Standards.

Signage

Burdette North will utilize monument signage where feasible on the site and within the City's Sign Ordinance requirements. The signage type and design will closely resemble existing signage at Burdette Central to maintain consistency of brand.

Landscaping

The developer and design team will adhere to all landscaping requirements as required by City Ordinance. Wherever possible, with Client direction, the team will strive to exceed requirements.

Conclusion

Burdette North represents the next evolution of downtown Simpsonville—an innovative, mixed-use community that strengthens the city's identity, supports local business, and creates a vibrant, connected environment for residents and visitors alike.

Through thoughtful design, sustainable features, and a commitment to quality development, this project will serve as a catalyst for continued downtown growth and exemplify the purpose and intent of the **Innovative Development (ID) zoning designation**.

© 2025 by Alliance Consulting Engineers, Inc. All information contained in this document is the property of Alliance Consulting Engineers, I
All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior explicit written permission of Alliance Consulting Engineers, Inc.



E COLLEGE STREET - EXTERIOR ELEVATION

1" = 10'-0"



NE MAIN STREET - EXTERIOR ELEVATION

1" = 10'-0"

NOTE:
SIGNAGE IS SUBJECT TO CHANGE. DRAWINGS REPRESENT CONCEPTS AND POTENTIAL LOCATIONS AT THIS PHASE
FINAL SELECTION OF MATERIALS AND COLOR MAY VARY

SHLTR architects

BURDETTE NORTH

ELEVATIONS | SD04

PROJECT #: 2566
SHEET DATE: 10/13/2025

COPYRIGHT 2025 - SHLTR ARCHITECTS, LLC | ALL RIGHTS RESERVED - PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION




VIEW @ CORNER OF NE MAIN STREET & E COLLEGE STREET


COPYRIGHT 2025 - SHLTR ARCHITECTS, LLC | ALL RIGHTS RESERVED - PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION



1 OPTION 1 - LEVEL 1
1" = 30'-0"

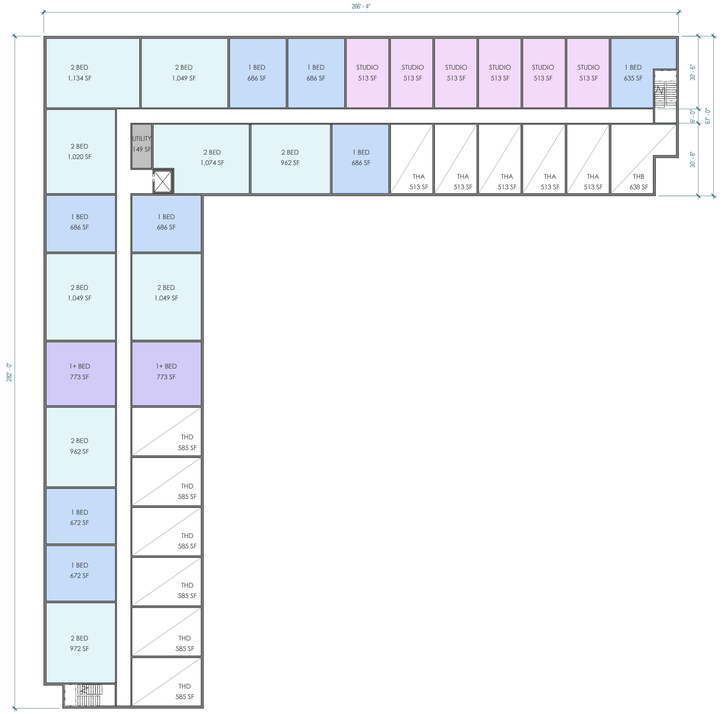

2 OPTION 1 - LEVEL 2
1" = 30'-0"

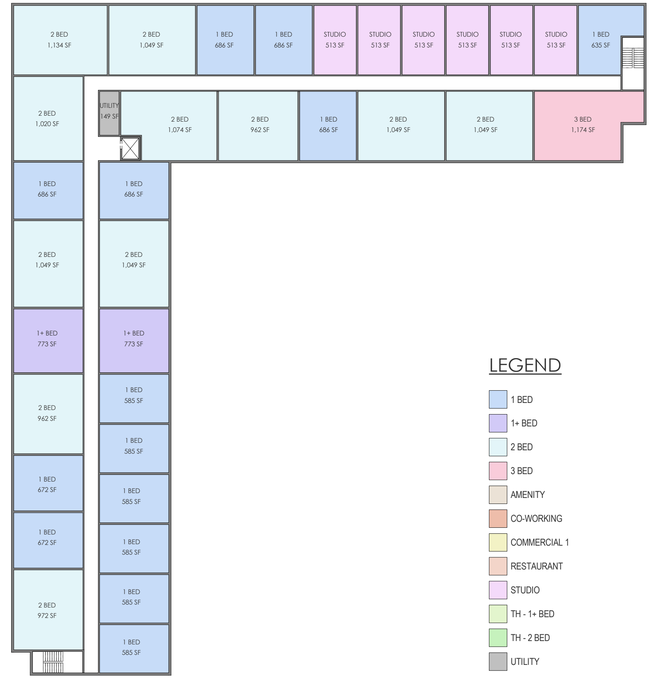

LEGEND

- 1 BED
- 1+ BED
- 2 BED
- 3 BED
- AMENITY
- CO-WORKING
- COMMERCIAL 1
- RESTAURANT
- STUDIO
- TH - 1+ BED
- TH - 2 BED
- UTILITY

3 OPTION 1 - LEVEL 3
1" = 30'-0"

NORTH

OPTION 1

	STUDIO	1 BED	1+ BED	2 BED	3 BED	TOTAL
L1			6	6		**12**
L2	6	8	2	9		**25**
L3	6	14	2	11	1	**34**
	12	**22**	**10**	**26**	**1**	**71**
	17%	31%	14%	37%	1%	

SHLTR architects


BURDETTE NORTH
CLIENT NAME
ADDRESS 1
CITY, STATE ZIP

OPTION 1 | SD01
PROJECT #: 2566
SHEET DATE: 10/13/2025


COPYRIGHT 2025 - SHLTR ARCHITECTS, LLC | ALL RIGHTS RESERVED - PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION



1 OPTION 2 - LEVEL 1
1" = 30'-0"

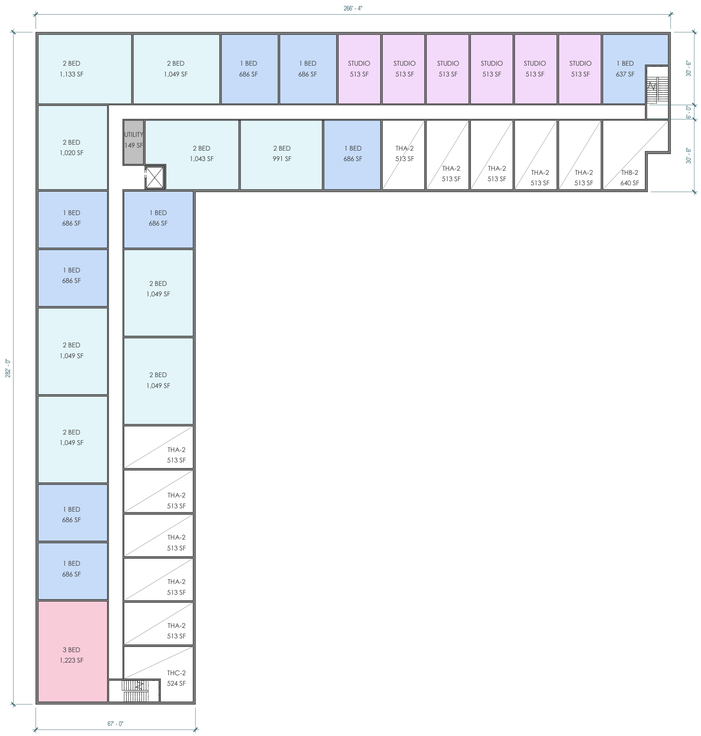

2 OPTION 2 - LEVEL 2
1" = 30'-0"

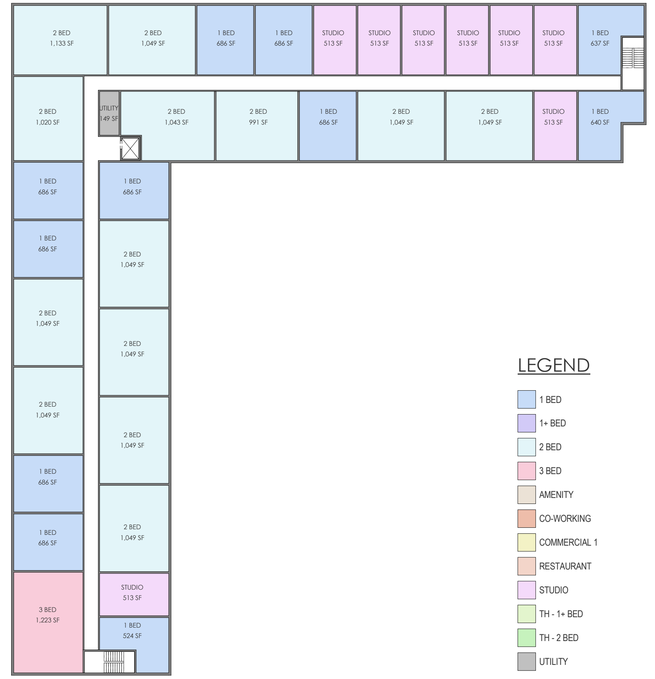

3 OPTION 2 - LEVEL 3
1" = 30'-0"

NORTH

OPTION 2

	STUDIO	1 BED	1+ BED	2 BED	3 BED	TOTAL
L1			10	2		**12**
L2	6	9		9	1	**25**
L3	8	11		13	1	**33**
	14	**20**	**10**	**24**	**2**	**70**
	20%	29%	14%	34%	3%	

LEGEND

- 1 BED
- 1+ BED
- 2 BED
- 3 BED
- AMENITY
- CO-WORKING
- COMMERCIAL 1
- RESTAURANT
- STUDIO
- TH - 1+ BED
- TH - 2 BED
- UTILITY

SHLTR architects

BURDETTE NORTH

CLIENT NAME
ADDRESS 1
CITY, STATE ZIP


OPTION 2 | SD02

PROJECT #: 2566
SHEET DATE: 10/13/2025


COPYRIGHT 2025 - SHLTR ARCHITECTS, LLC | ALL RIGHTS RESERVED - PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION



1 OPTION 3 - LEVEL 1
1" = 30'-0"

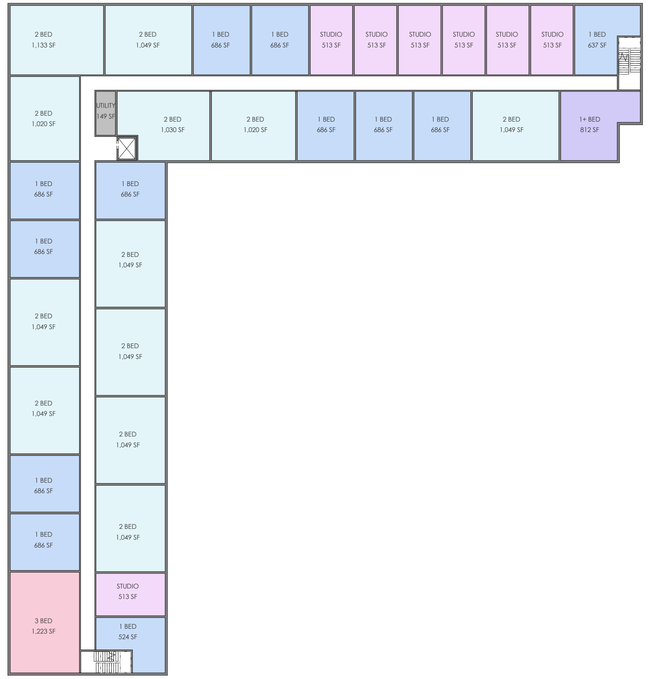

2 OPTION 3 - LEVEL 2
1" = 30'-0"

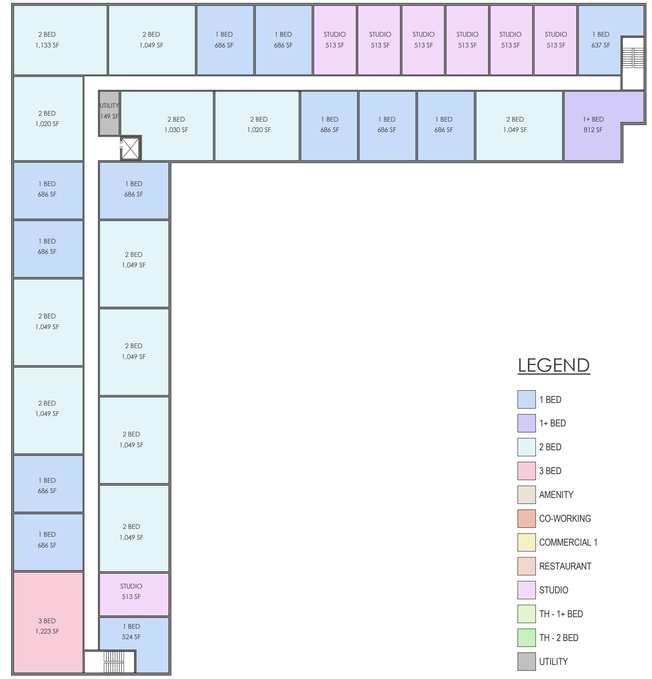

3 OPTION 3 - LEVEL 3
1" = 30'-0"

NORTH

OPTION 3

	STUDIO	1 BED	1+ BED	2 BED	3 BED	TOTAL
L1	1	3	1	3		**8**
L2	7	12	1	12	1	**33**
L3	7	12	1	12	1	**33**
	15	**27**	**3**	**27**	**2**	**74**
	20%	36%	4%	37%	3%	

LEGEND

- 1 BED
- 1+ BED
- 2 BED
- 3 BED
- AMENITY
- CO-WORKING
- COMMERCIAL 1
- RESTAURANT
- STUDIO
- TH - 1+ BED
- TH - 2 BED
- UTILITY

SHLTR architects

BURDETTE NORTH
CLIENT NAME
ADDRESS 1
CITY, STATE ZIP

OPTION 3 | SD03

PROJECT #: 2566
SHEET DATE: 10/13/2025

COPYRIGHT 2025 - SHLTR ARCHITECTS, LLC | ALL RIGHTS RESERVED - PRINTED OR ELECTRONIC DRAWINGS AND DOCUMENTATION MAY NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION

CITY OF SIMPSONVILLE
ZONING AMENDMENT (REZONING) APPLICATION

SITE/PROPERTY LOCATION:

Property Address: 1188124 NE Main St Simpsonville, SC 29681

Tax Map Number: 0315000200100 0315000200400

APPLICANT: Ryan D. Jones, P.E. CAlliance Consulting Engineers, Inc.

Mailing Address: 124 Verdae, Suite 505 City, State, Zip: Greenville, SC 29607

Phone Number: 864-284-1740 E-mail Address: rjones@alliancece.com

PROPERTY OWNER (if different from Applicant): Kenneth Reiter / John Pazdan

Mailing Address: Blue Ridge Land Holdings, LLC Attn: John Pazdan City, State, Zip: PO Box 8856 Greenville, SC 29604

Phone Number: 864-430-6081 E-mail Address: kreiter@belmontsayre.com chanticleer18@gmail.com

	Current	*Requested*
Zoning District:	B-U	ID
"Future Land Use Map" Designation:	N/A	N/A

Project Description (be specific): Demolition of an existing/former Bank & City Hall and construction of a new Multi/Mixed Use Development in it's place over the two adjoining parcels.

No. of Parcels: 2 Acreage of Parcel(s): +/- 2.52

Submittal Checklist*:

- ☐ Consent Letter from Property Owner (if application is not signed by property owner)
- ☑ Cover Letter explaining your request in detail
- ☑ Application Fee (see "Rezoning Guide")
- ☑ Survey/Boundary Map – 1 printed copy/1 PDF copy

*Staff reserves the right to request additional information and/or materials as necessary

I do hereby certify as property owner/authorized agent that the information shown on this application and any attached forms and/or plans is correct.

Signature	Printed Name	Date
	Kenneth M Reiter	October 17, 2025

FOR CITY STAFF USE ONLY

Date Received: _____ By: _____ Docket #: _____ Zoning District: _____

Comments: _____ PC Review: _____ CC Review: _____

☐ APPROVED (☐ with conditions) ☐ DENIED

Z-2025-02 118 & 124 NE. Main St Rezoning to I-D



October 30, 2025

1:1,600

0 75 150 300 ft

0 20 40 80 m

Legend

- Subject Property
- Parcels

Greenville County GIS Division, Greenville, South Carolina, Greenville County GIS Division, Greenville County, South Carolina GIS Division

Disclaimer: This Map is not a LAND SURVEY and is for reference purposes only. Data contained in this map are prepared for the inventory of Real Property found within this jurisdiction, and are

Z-2025-02 118 & 124 NE. Main St Rezoning to I-D



October 30, 2025

1:1,600

0 75 150 300 ft

0 20 40 80 m


Legend


- Subject Property
- Parcels

Greenville County GIS Division, Greenville, South Carolina, Greenville County GIS Division, Greenville County, South Carolina GIS Division

Disclaimer: This Map is not a LAND SURVEY and is for reference purposes only. Data contained in this map are prepared for the inventory of Real Property found within this jurisdiction, and are

NOTE: EXCEPT AS SPECIFICALLY STATED OR SHOWN ON THIS PLAT, THIS SURVEY DOES NOT PURPORT TO REFLECT ANY OF THE FOLLOWING WHICH MAY BE APPLICABLE TO THE SUBJECT REAL ESTATE: RIGHTS-OF-WAY, EASEMENTS, OTHER THAN POSSIBLE EASEMENTS THAT WERE VISIBLE AT THE TIME OF MAKING THIS SURVEY; BUILDING SETBACK LINES; RESTRICTIVE COVENANTS; SUBDIVISION RESTRICTIONS; ZONING OR OTHER LAND USE REGULATIONS AND ANY OTHER FACTS THAT AN ACCURATE AND CURRENT TITLE SEARCH MAY DISCLOSE. – ANY FLOOD PLAIN DATA SHOWN HEREON IS AN APPROXIMATE LOCATION GRAPHICALLY PLOTTED FROM THE REFERENCED FEMA MAP UNLESS OTHERWISE NOTED. – THIS SURVEY DOES NOT CONSTITUTE A TITLE RESEARCH, FLOOD STUDY, WETLAND DELINEATION OR ENVIRONMENTAL INSPECTION BY SURVEYOR.

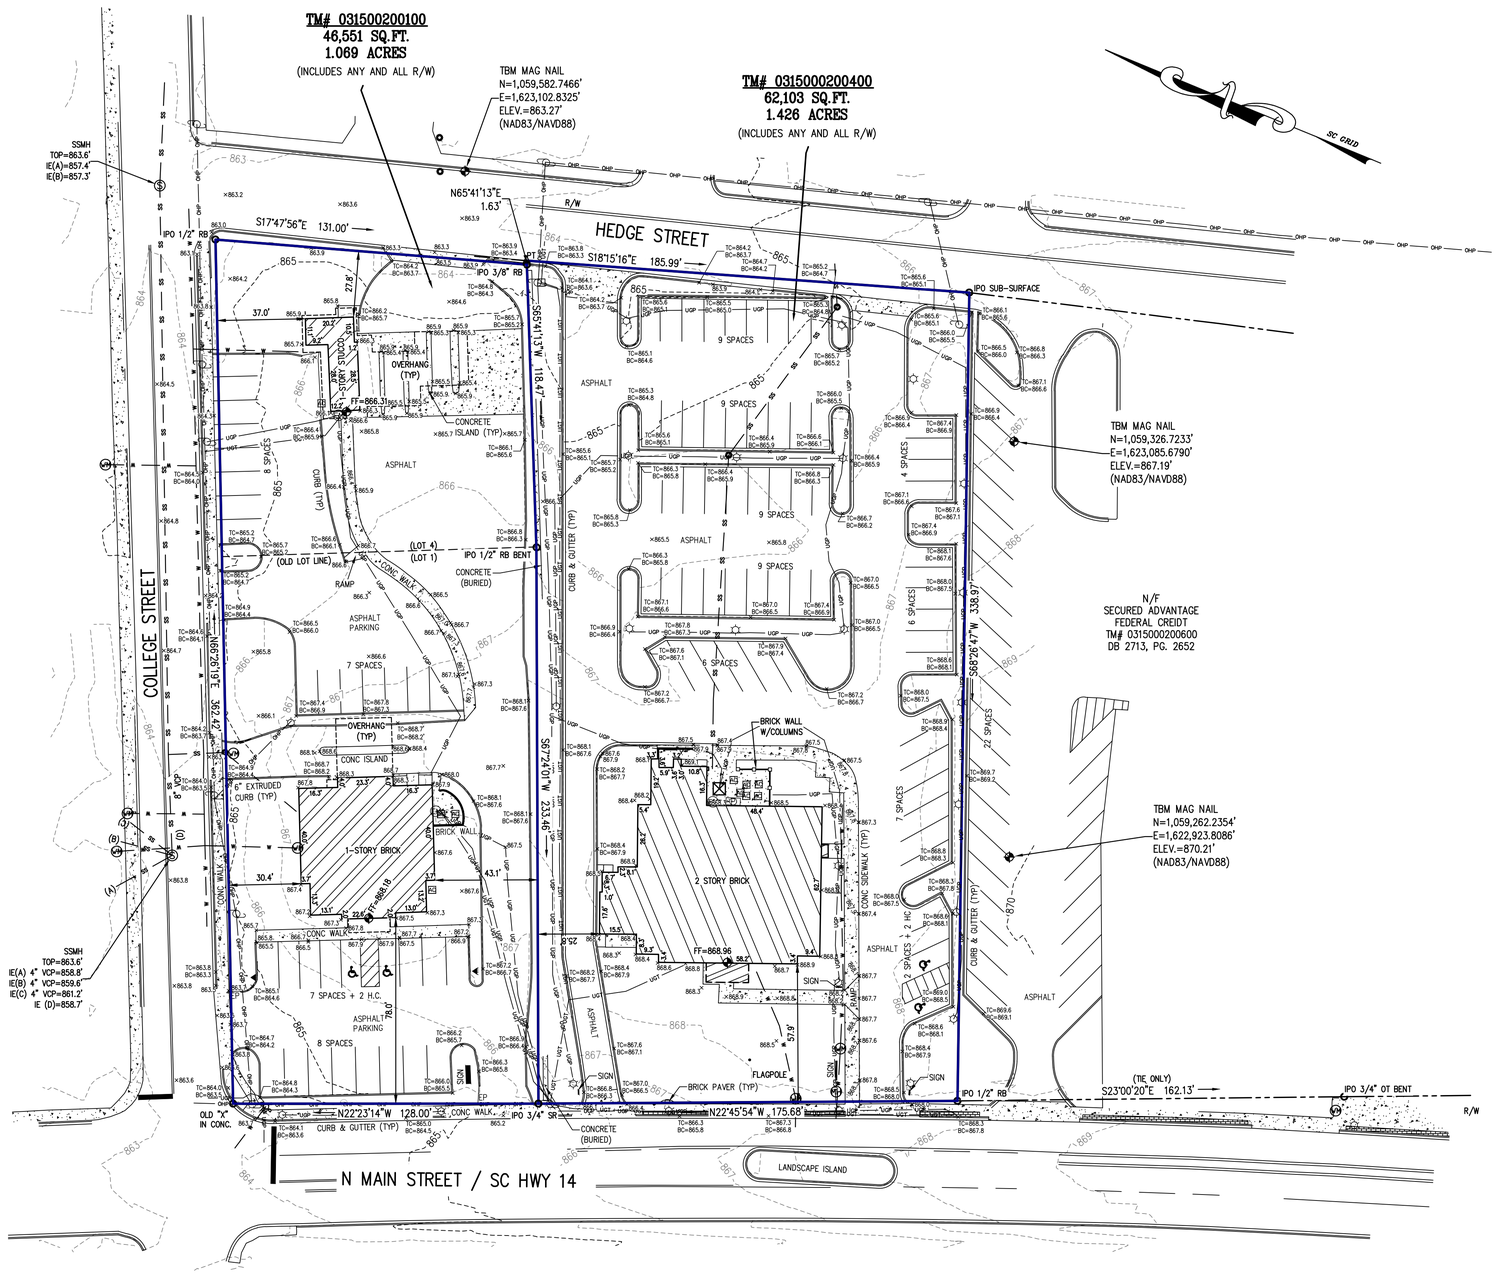



I HEREBY STATE THAT TO THE BEST OF MY PROFESSIONAL KNOWLEDGE, INFORMATION, AND BELIEF, THE SURVEY SHOWN HEREIN WAS MADE IN ACCORDANCE WITH THE REQUIREMENTS OF THE STANDARDS OF PRACTICE MANUAL FOR SURVEYING IN SOUTH CAROLINA, AND MEETS OR EXCEEDS THE REQUIREMENTS FOR A CLASS "A" SURVEY AS SPECIFIED THEREIN; ALSO THERE ARE NO VISIBLE ENCROACHMENTS OR PROJECTIONS OTHER THAN SHOWN.

REFERENCE:
DB. 2623, PG. 2891
PB. 1397, PG. 56

DB. 2759, PG. 834
PB. 1522, PG. 21

A. CLAY JONES, P.L.S.
S.C. REG. NO. 26210

SOUTH CAROLINA
SITE DESIGN, INC.
No. C00122
CERTIFICATE OF AUTHORIZATION

TOPO NOTES:
1. ELEVATIONS ARE BASED ON NAVD88 (SCVRS)
2. CONTOURS ARE SHOWN AT 1' INTERVALS

CAUTION

811 Know what's **below.** **Call** before you dig.

THE UTILITIES SHOWN ARE SHOWN FOR THE CONTRACTOR'S CONVENIENCE ONLY. THERE MAY BE OTHER UTILITIES NOT SHOWN ON THESE PLANS. THE SURVEYOR ASSUMES NO RESPONSIBILITY FOR THE LOCATIONS SHOWN AND IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE LOCATIONS OF ALL UTILITIES WITHIN THE LIMITS OF THE WORK. ALL DAMAGE MADE TO EXISTING UTILITIES BY THE CONTRACTOR SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

LEGEND

BH	BUILDING HEIGHT	TC/BC	TOP/BOTTOM CURB
BL	BUILDING LINE	TW/BW	TOP/BOTTOM WALL
CL	CENTERLINE	CO	CLEAN OUT
CMP	CORRUGATED METAL PIPE	CB	CATCH BASIN
CT	CRIMP TOP	DI	DROP INLET
DE	DRAINAGE EASEMENT		ELEC TRANS
EP	EDGE OF PAVEMENT	×865.5	ELEVATION
IPO	IRON PIN OLD		FIRE HYDRANT
IPS	IRON PIN SET		GAS METER
N&C	NAIL & CAP	GV	GAS VALVE
OT	OPEN TOP	LP	LIGHT POLE
RB	REBAR	PP	POWER POLE
RCP	REINFORCED CONC PIPE	SDMH	MANHOLE (SD)
R/W	RIGHT OF WAY	SSMH	MANHOLE (SS)
SD	STORM DRAIN	TMH	MANHOLE (TELEPHONE)
SS	SANITARY SEWER	TELPED	TELEPHONE PEDESTAL
SSE	SS EASEMENT	CATVPED	CABLE PEDESTAL
VCP	VITRIFIED CLAY PIPE	WM	WATER METER
		WV	WATER VALVE
		GT	GREASE TRAP MH
		PVI	POST VALVE INDICATOR
		UGP	UGP BOX
			POINT
			YARD LIGHT
			WELL
		GUY	GUY ANCHOR
		EM	ELECTRIC METER
		CTV	CABLE TV
			FENCE LINE
		FOC	FIBER OPTIC CABLE
		GAS	GAS LINE
		OHP	OVERHEAD POWER
		OHT	OVERHEAD TELEPHONE
		SD	STORM DRAIN
		SS	SANITARY SEWER
		UGP	UNDERGROUND POWER
		UGT	UNDERGROUND TEL
		W	WATER LINE

TOPOGRAPHIC SURVEY FOR

ACE 124–118 NE MAIN

GREENVILLE COUNTY, SOUTH CAROLINA

SCALE	PROPERTY ADDRESS	TAX PIN
1" = 30'	124 & 118 NE MAIN STREET	0315000200100 0315000200400
DATE	30 0 30 60	FIELD CREW / DRAWN BY
10/10/25		VS/HL / TBO

SITE DESIGN, INC.
CIVIL ENGINEERS - SURVEYORS - LANDSCAPE ARCHITECTS

225 ROCKY CREEK ROAD, GREENVILLE, SC 29615
PH: (864)271-0496
www.sitedesign-inc.com

S241352.01 TOPO

TRAFFIC IMPACT STUDY

Burdette North

Simpsonville, South Carolina


NOVEMBER 5, 2025

IMPACT DESIGNS, INC.
Prepared by: Allen J. Reid, PE

TRAFFIC IMPACT STUDY

Burdette North

SIMPSONVILLE, SOUTH CAROLINA

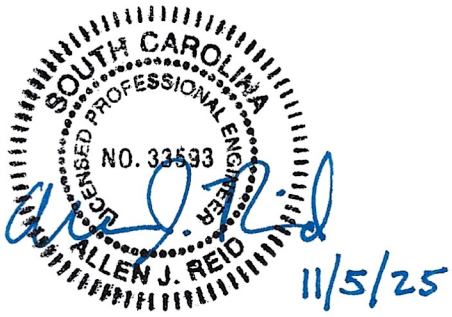

REPORT PREPARED FOR:
Alliance Consulting Engineers, Inc.
124 Verdae Boulevard, Suite 505
Greenville, SC 29607

REPORT PREPARED BY
Impact Designs Inc.
172 Williamson Road, Unit 3728
Mooresville, NC 28117
nick@impactdesignsinc.com

Table of Contents

EXECUTIVE SUMMARY iii

1. INTRODUCTION 1

1.1. Project Summary 1

1.2. Existing Roadway Conditions 1

1.3. Planned Roadway Improvements 2

1.4. Driveway Locations 2

2. TRAFFIC VOLUME DEVELOPMENT 7

2.1. Existing Traffic Volumes 7

2.2. Rerouted Traffic Volumes 7

2.3. Projected Traffic Volumes 7

2.4. Proposed Development Traffic Volumes 8

2.5. Future Build Traffic Volumes 8

3. TRAFFIC IMPACT ANALYSIS 16

3.1. Turn Lane Analysis 16

3.2. Intersection LOS Analysis 16

4. SUMMARY OF FINDINGS 20

Tables

Table 1 – Study Area Summary 1

Table 2 – Trip Generation 8

Table 3 – *HCM 6th Edition* LOS Criteria for Signalized & Unsignalized Intersections 16

Table 4 – Intersection Capacity Analysis Results 17

Figures

Figure 1 – Project Location 3

Figure 2 – Conceptual Site Plan 4

Figure 3 – Existing Lane Configuration 5

Figure 4 – No-Build Lane Configuration 6

Figure 5 – Raw Existing (2025) Traffic Volumes 9

Figure 6 – One-Way Volume Adjustments 10

Figure 7 – Adjusted Existing (2025) Traffic Volumes 11

Figure 8 – No-Build (2028) Traffic Volumes 12

Figure 9 – Site Trip Distribution 13

Figure 10 – Site Trip Assignments 14

Figure 11 – Build (2028) Traffic Volumes 15

Figure 12 – Recommended Lane Configuration 19

Appendices

A) Traffic Count Data

B) Turn Lane Analysis

C) Synchro Analysis Reports

D) SimTraffic Analysis Reports

E) Background Improvements

EXECUTIVE SUMMARY

A traffic impact study was conducted for the proposed Burdette North development in accordance with SCDOT guidelines. The proposed development is located on the southeast corner of College Street and NE Main Street (SC 417), in Simpsonville, South Carolina. The development is expected to consist of 12,812 square feet of retail and up to 80 multi-family units and is anticipated to be constructed by the end of 2028. Direct access to Burdette North development is proposed to be provided via two full movement connections: one on Hedge Street and one on College Street. The development is expected to have parallel parking along Hedge Street, however, to be conservative all traffic was assumed to access the site through the site accesses.

A turn lane analysis was conducted at the site accesses utilizing the Build (2028) volumes. Based on build-out volumes, there are no turn lanes warranted at the site accesses.

The capacity analysis indicates that the signalized study intersections approaches are expected to maintain their LOS from No-Build to Build conditions, except for the northbound and southbound approach of NE Main Street (SC 417) and Curtis Street. Although, the approaches are expected to operate at LOS D or better in the Build scenario, which is still considered acceptable. Therefore, there is no mitigation recommended at the signalized intersections.

Additionally, the unsignalized study intersections are expected to operate at an LOS C or better in all scenarios. The site accesses are expected to operate at LOS B or better in the Build scenario. Therefore, there is no mitigation recommended at the study intersections based on the capacity analysis.

<u>Recommendations:</u>

- None

1. INTRODUCTION

The purpose of this report is to summarize the traffic impact study that was completed for the Burdette North site in Simpsonville, South Carolina. The study was developed in accordance with SCDOT guidelines. This report summarizes the procedures and findings of the traffic impact study.

1.1. Project Summary

The proposed development is located on the southeast corner of College Street and NE Main Street (SC 417), in Simpsonville, South Carolina. The development is expected to consist of 12,812 square feet of retail and up to 80 multi-family units and is anticipated to be constructed by the end of 2028. This traffic impact study analyzes the effects of the additional traffic associated with the proposed development during the weekday AM (7:00 AM - 9:00 AM) and the weekday PM (4:00 PM - 6:00 PM) peak periods. The study area for the purpose of the analysis includes:

- NE Main Street (SC 417) and College Street
- NE Main Street (SC 417) and Curtis Street
- Hedge Street and College Street
- Hedge Street and Curtis Street
- Main Street and College Street
- Main Street and Curtis Street
- Hedge Street and Access A
- College Street and Access B

The proposed development is expected to be built out by the end of 2028; therefore, 2028 was considered as the future year for the purpose of this analysis. Refer to Figures 1 and 2 for the site location and the conceptual site plan.

1.2. Existing Roadway Conditions

The primary roadways within the study area include NE Main Street (SC 417), Curtis Street and College Street. A summary of their existing characteristics is shown in Table 1.

Table 1 – Study Area Summary

Facility Name	Route #	Typical Cross Section	Posted Speed Limit	Maintained By	2024 AADT
College Street	N/A	2-lane undivided	25 MPH	Local	No Data
Curtis Street		2-lane undivided	25 MPH	SCDOT/Local	6,200
NE Main Street	SC 417	2-lane undivided	35 MPH	SCDOT	19,400

Refer to Figure 3 for an illustration of the existing geometry and traffic control at the study intersections.

1.3. Planned Roadway Improvements

The City of Simpsonville and SCDOT intend to construct a project to convert Curtis Street and College Street to a one-way pair with counterclockwise circulation. Based on the information provided by SCDOT and City staff, the following geometric improvements are proposed:

Curtis Street

- Convert the existing 2-lane road to a one-way two-lane road travelling eastbound.
- Adjust all intersections along Curtis Street to account for the approach restrictions.

College Street

- Convert the existing 2-lane road to a one-way two-lane road travelling westbound.
- Adjust all intersections along College Street to account for the approach restrictions.

College Street and NE Main Street (SC 417)

- Extend the northbound left turn lane to have 150 feet of storage.


Curtis Street and NE Main Street (SC 417)

- Extend the southbound left turn lane to have 225 feet of storage.

It was assumed that these projects would be completed prior to the build out of the Burdette North development. Refer to Figure 4 for an illustration of the background improvements. Refer to Appendix E for improvement plans and drawings.

1.4. Driveway Locations

Direct access to Burdette North development is proposed to be provided via two full movement connections: one on Hedge Street and one on College Street. The development is expected to have parallel parking along Hedge Street, however, to be conservative all traffic was assumed to access the site through the site accesses.

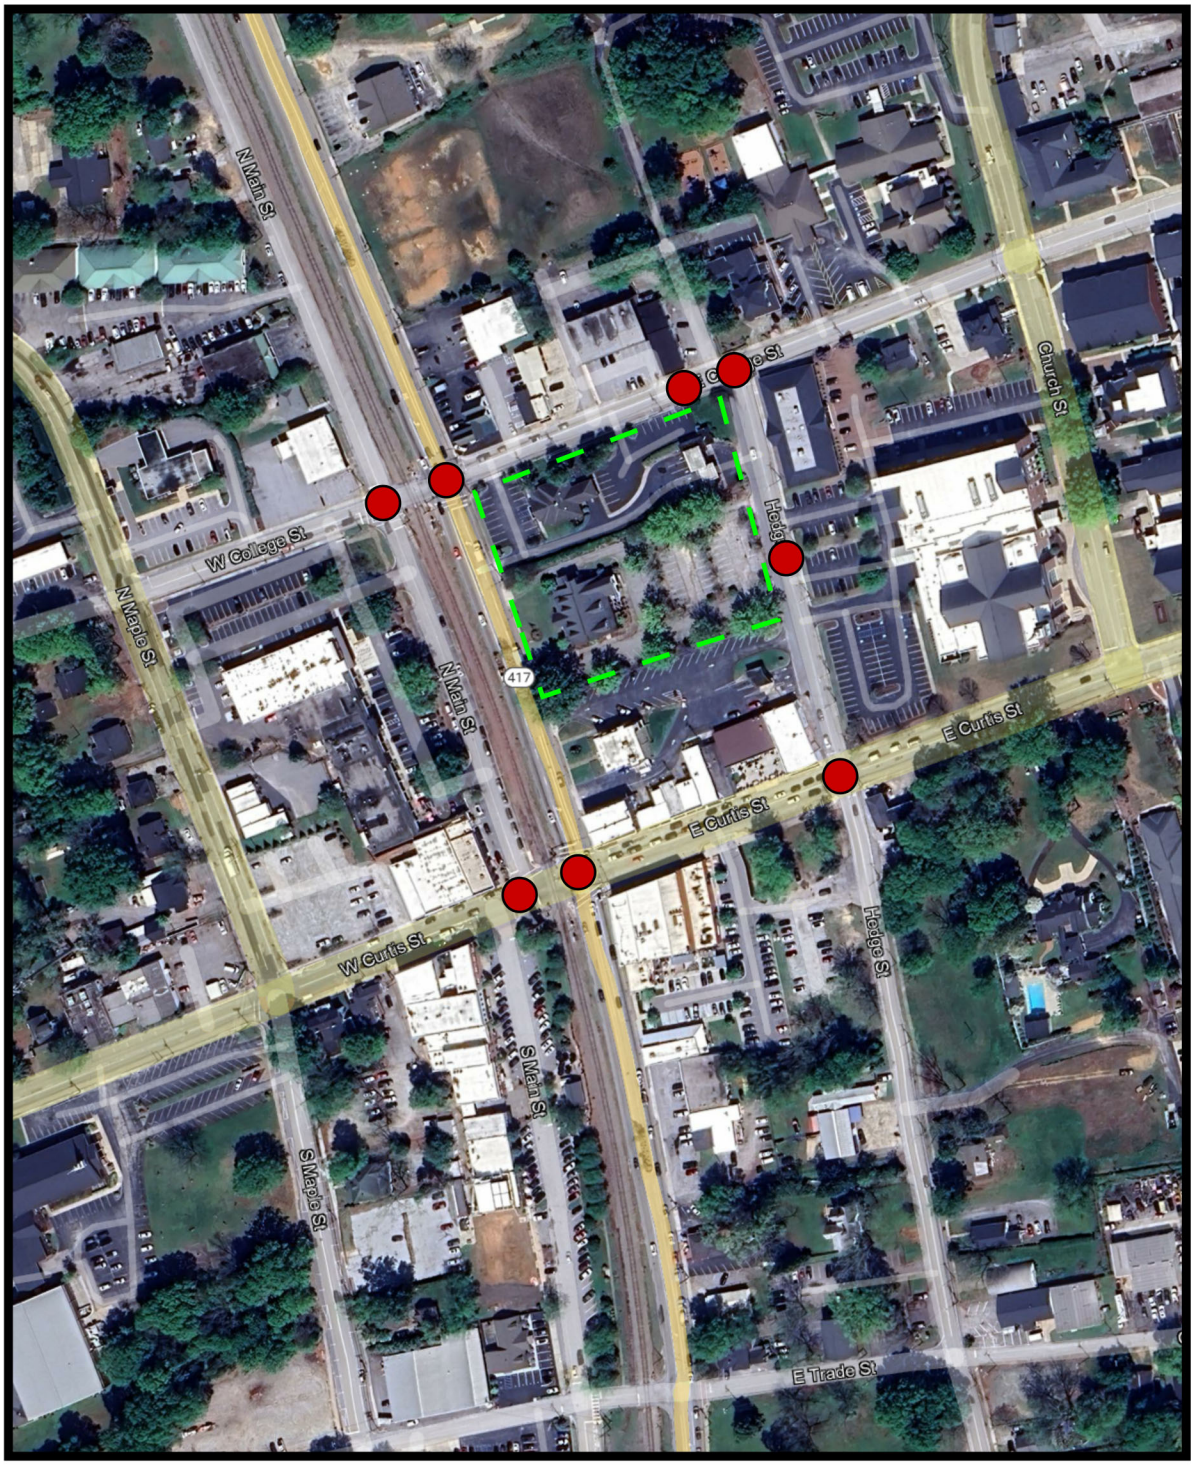

NORTH

LEGEND

Proposed Site Location

Study Intersections

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Site Location Map

Scale: Not to Scale	Figure	1



SITE INFORMATION:
- TM#: 0315000200100, 0315000200400
- SIZE: ±2.52 ACRES
- EXISTING ZONING: B-U (BUSINESS - URBAN)
- PROPOSED ZONING: ID (INNOVATIVE DEVELOPMENT)
- SETBACKS: -FRONT = NONE
  -SIDE = NONE
  -REAR = NONE
- PARKING REQUIREMENTS:
  - STALL WIDTH
    90-DEGREE STALL= 9-FT X 18FT 24-FT AISLE
  - PROVIDED PARKING COUNT: 144 SPACES
  - PASSENGER: 139 SPACES
  - ADA: 5 SPACES
- PROPOSED BUILDING:
- MIXED USE DEVELOPMENT
- 3 STORIES

PROPOSED BUILDING INFORMATION:

	RESIDENTIAL	AMENITY	RETAIL	COMMERCIAL	TOTAL
LEVEL 1	13,994	6,147	8,991	3,823	32,955
LEVEL 2	32,955				32,955
LEVEL 3	32,955				32,955
TOTAL	79,904	6,147	8,991	3,823	98,865

RESIDENTIAL UNIT COUNT: 73

NOTE: BOUNDARIES, TOPOGRAPHY, WETLANDS, AND STREAMS LOCATIONS ARE APPROXIMATE BASED OFF GEOGRAPHIC INFORMATION SYSTEMS (GIS). A BOUNDARY AND TOPOGRAPHIC SURVEY ALONG WITH A WETLAND DELINEATION SHOULD BE PERFORMED TO DETERMINE ACCURATE BOUNDARY, TOPOGRAPHIC, AND WETLAND LOCATIONS.

Documents prepared or furnished by Alliance Consulting Engineers, Inc. are instruments of service, and Alliance Consulting Engineers, Inc. retains an ownership and property interest (including the copyright and the right of reuse) in such documents, whether or not the project is completed.

50 25 0 50 150

(IN FEET)


Project No.: 25195-0023
October 9, 2025

±99,000-SF Mixed-Use Development Located Along North East Main Street City of Simpsonville Greenville County, South Carolina

Blue Ridge Land Holdings, LLC

ALLIANCE CONSULTING ENGINEERS

Prepared by Alliance Consulting Engineers, Inc.

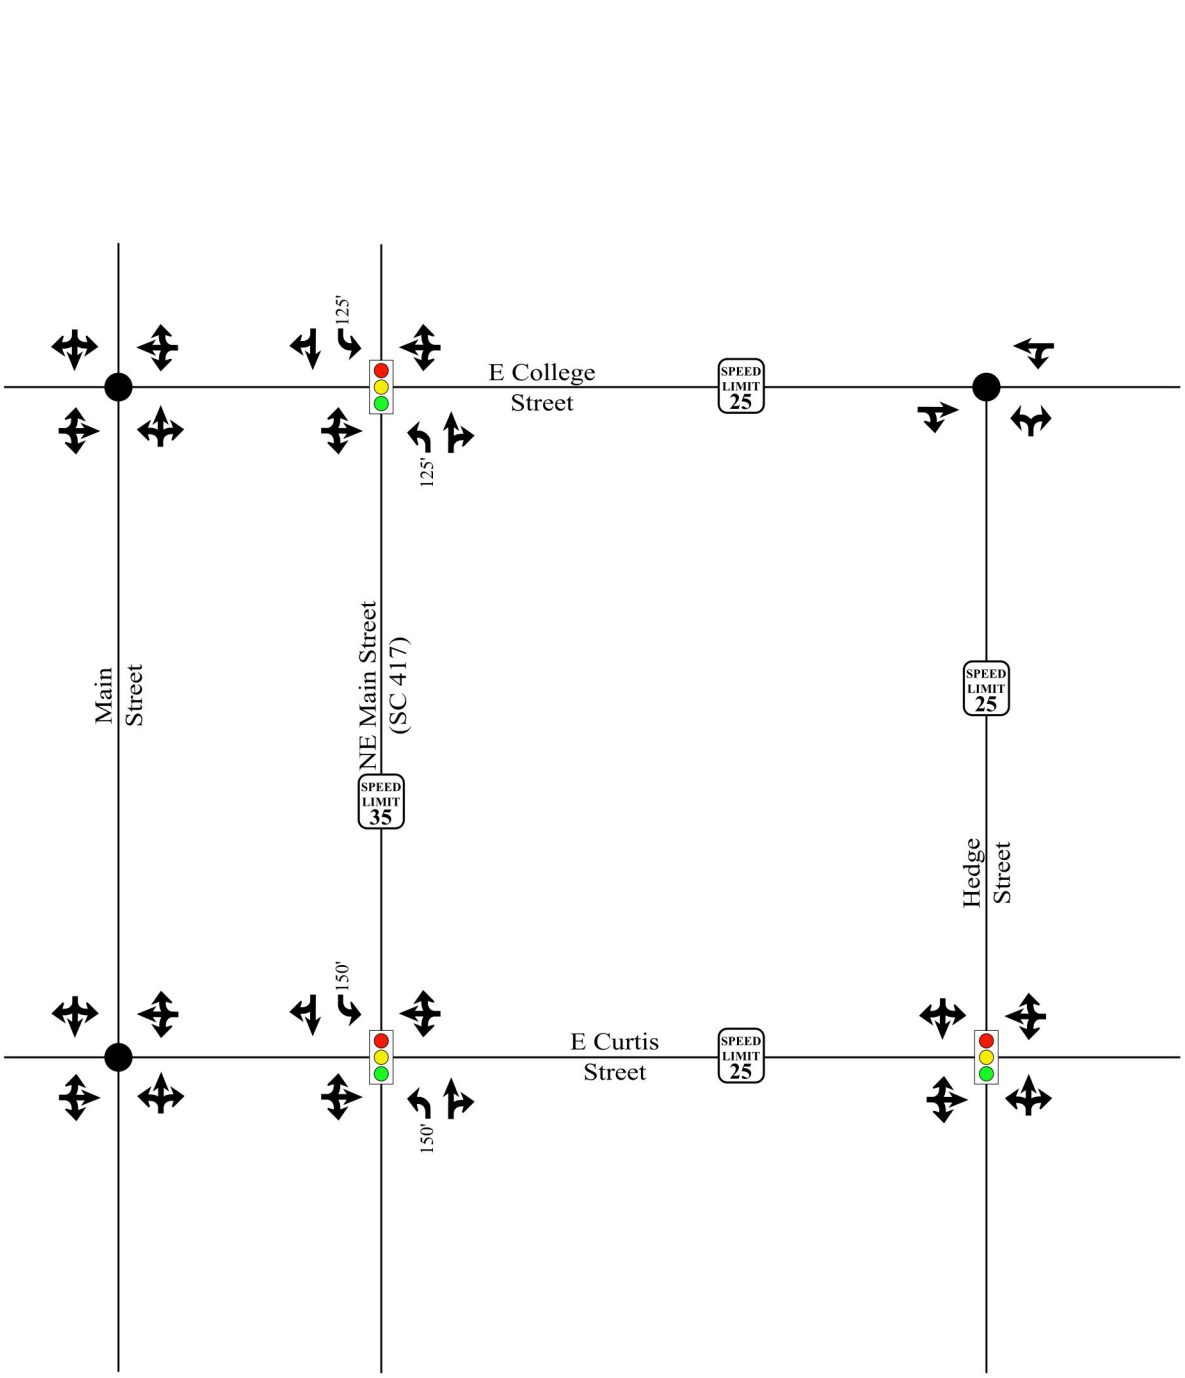

LEGEND


- Signalized Intersection
- Unsignalized Intersection
- Existing Lane
- X' Storage (In Feet)
- SPEED LIMIT XX Posted Speed Limit

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Existing Lane Configurations and Traffic Control

Scale: Not to Scale	Figure	3

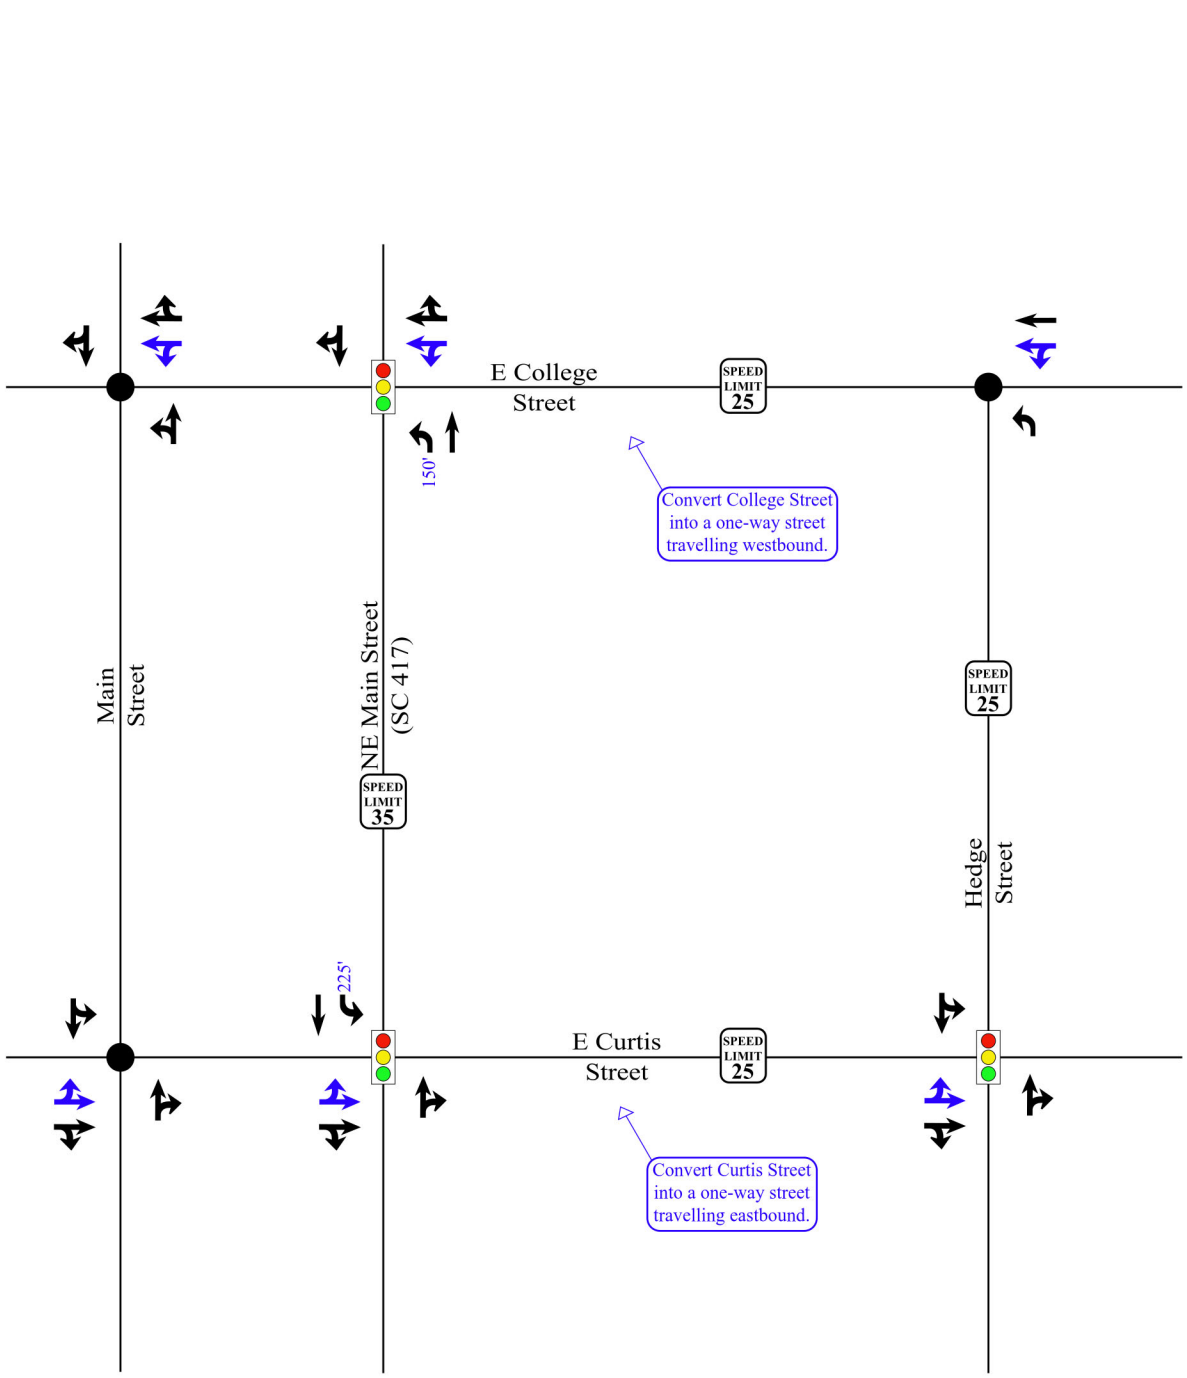

LEGEND

- Signalized Intersection
- Unsignalized Intersection
- Existing Lane
- Background Improvement
- X' Storage (In Feet)
- SPEED LIMIT XX Posted Speed Limit

IMPACT Designs, Inc.

Burdette North
Simpsonville, SC

No-Build Lane Configurations and Traffic Control

Scale: Not to Scale	Figure	4

2. TRAFFIC VOLUME DEVELOPMENT

2.1. Existing Traffic Volumes

Existing turning movement counts were conducted at the study intersections in September 2025, during the AM (7:00 AM to 9:00 AM) peak period and the PM (4:00 PM to 6:00 PM) peak period. The 2025 traffic volumes are illustrated in Figure 5.

2.2. Rerouted Traffic Volumes

As previously mentioned, the City of Simpsonville and SCDOT intend to construct a project to convert Curtis Street and College Street to a one-way pair with counterclockwise circulation. Due to adjustment to the path of travel, it was assumed that eastbound traffic on College Street will become eastbound traffic on Curtis Street and westbound traffic on Curtis Street will become westbound traffic on College Street. Refer to Figure 6 and 7 for an illustration of the rerouted volumes on the study network.

2.3. Projected Traffic Volumes

Based on SCDOT Average Annual Daily Traffic (AADT) volumes, daily traffic volumes in the study area have grown at a rate of 2% in the past years. A 2% annual growth rate was applied to the 2025 rerouted volumes to develop the No-Build (2028) volumes. This growth rate was applied to account for all background growth in the area without any adjacent and/or the proposed developments. Refer to Figure 8 for an illustration of the No-Build (2028) traffic volumes at the study intersections.

2.4. Proposed Development Traffic Volumes

As mentioned previously, the proposed development is expected to consist of 12,812 square feet of retail and up to 80 multi-family units and is anticipated to be constructed by the end of 2028. The trip generation potential for the proposed development was estimated utilizing methodology contained within the ITE's *Trip Generation Manual*, 11th Edition. Utilizing ITE data for ITE Codes 220 and 822, traffic volumes were generated for the weekday daily, the weekday AM peak hour, and the weekday PM peak hour. Refer to Table 2 for a summary of the trip generation potential of the proposed development.

Table 2 – Trip Generation

ITE Land Use (Code)	Density	Independent Variable	Daily Traffic	AM Peak		PM Peak	
				Enter	Exit	Enter	Exit
Strip Retail Plaza (<40k) (ITE Code 822)	12.81	KSF	698	18	12	42	42
Multi-Family Housing (Low-Rise) (ITE Code 220)	80	Dwelling Units	588	11	37	35	20
Total New Trips			**1,286**	**29**	**49**	**77**	**62**


Traffic associated with the proposed development was distributed and assigned to the roadway network based upon existing travel patterns and are summarized below:

- 30% to/from the north via NE Main Street (SC 417)
- 15% to/from the south vis NE Main Street (SC 417)
- 10% to/from the south via Hedge Street
- 25% to the east via Curtis Street
- 25% from the east via College Street
- 20% to the west via College Street
- 20% from the west via College Street

Refer to Figures 9 and 10 for the site trip distributions and assignments.

2.5. Future Build Traffic Volumes

The site generated traffic volumes were added to the No-Build (2028) traffic volumes to determine the Build (2028) volumes. The Build (2028) volumes are illustrated in Figure 11.

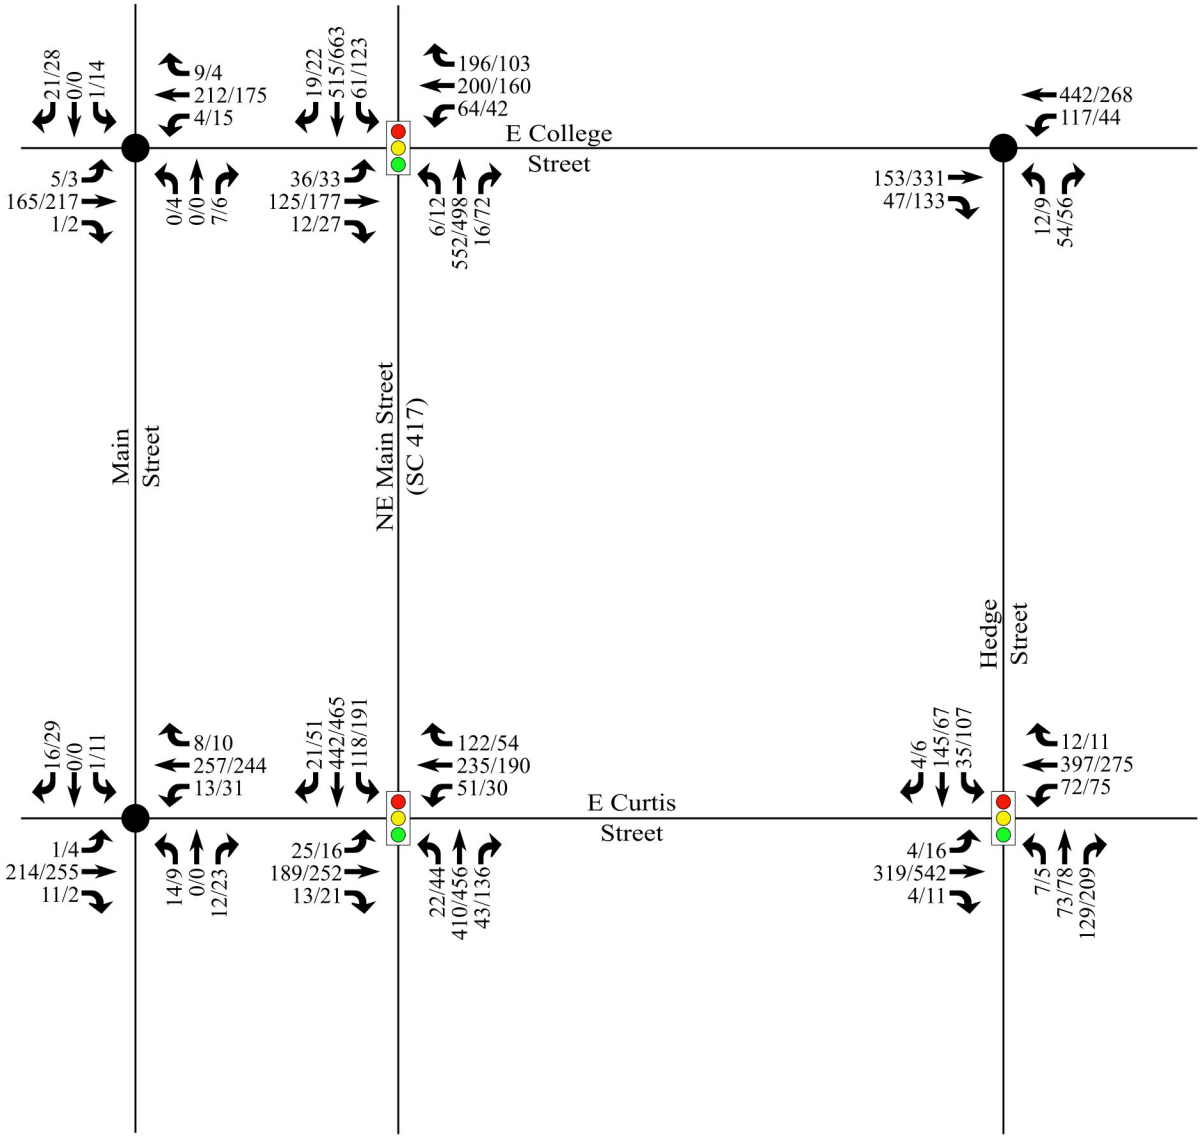

LEGEND

Signalized Intersection

Unsignalized Intersection


X / Y → AM / PM Peak Hour Traffic

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Raw Existing (2025)
Traffic Volumes

Scale: Not to Scale	Figure	5

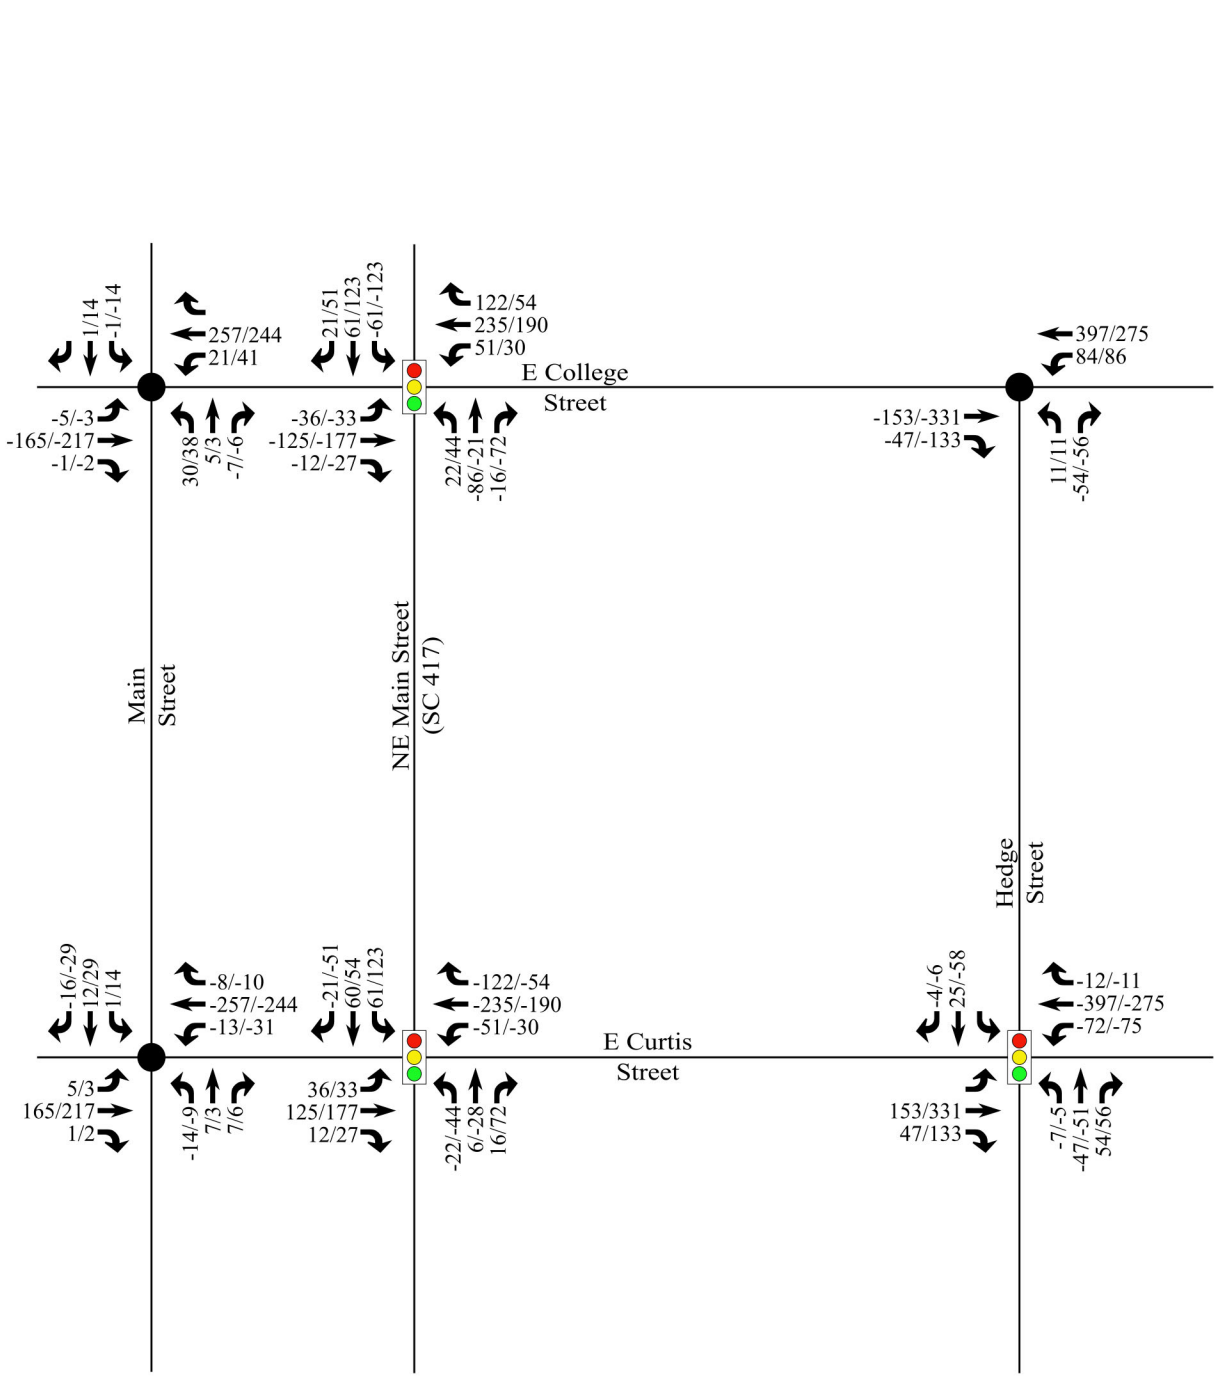

LEGEND

Signalized Intersection

Unsignalized Intersection


X / Y → AM / PM Peak Hour Traffic

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

One-Way Volume Adjustments

Scale: Not to Scale	Figure	6

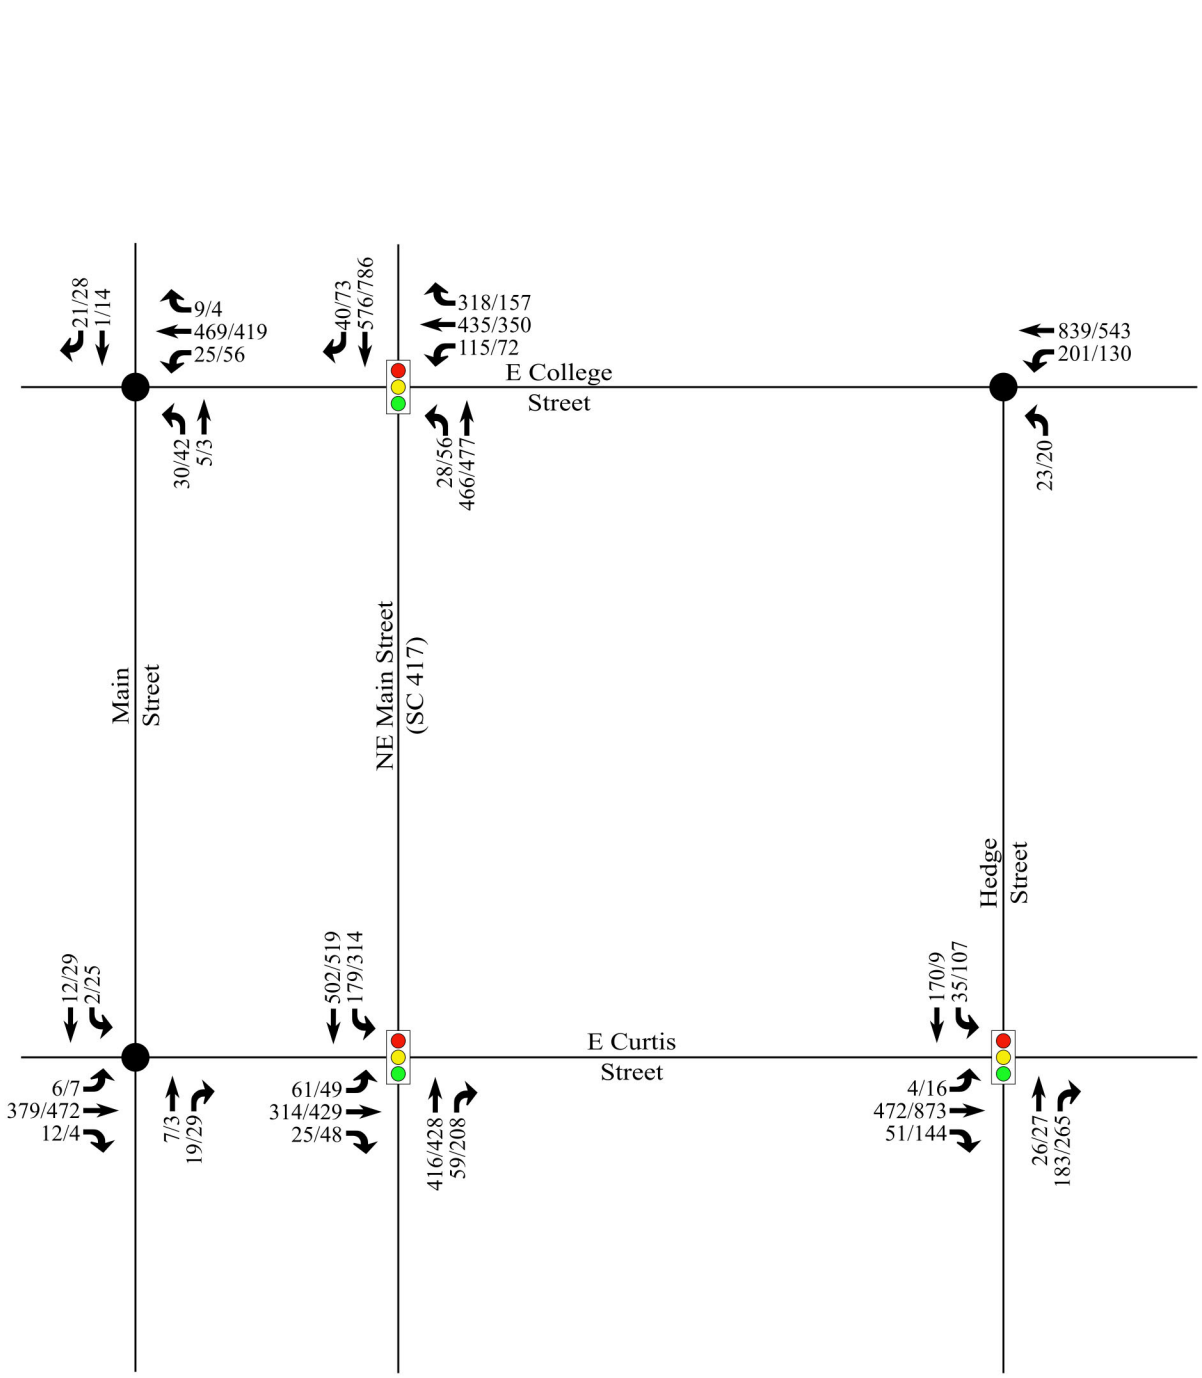

LEGEND


- Signalized Intersection
- Unsignalized Intersection
- X / Y → AM / PM Peak Hour Traffic

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Adjusted Existing (2025)
Traffic Volumes

Scale: Not to Scale	Figure	7

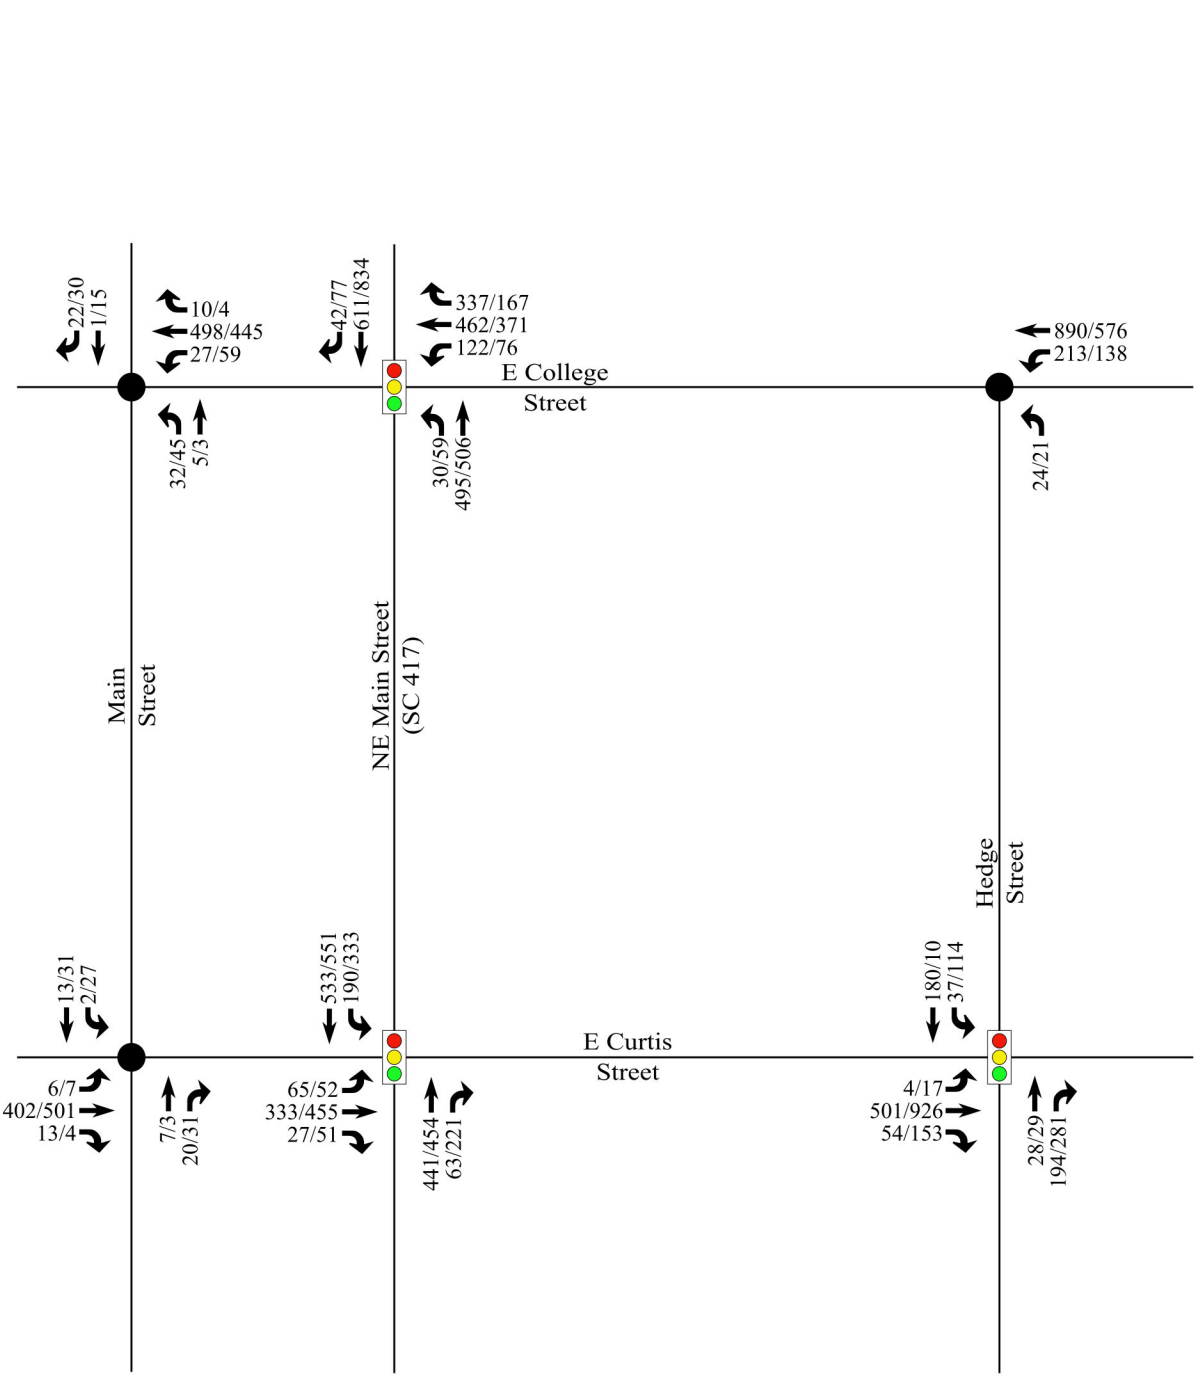

LEGEND


- Signalized Intersection
- Unsignalized Intersection
- X / Y → AM / PM Peak Hour Traffic

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

No-Build (2028)
Traffic Volumes

Scale: Not to Scale	Figure	8

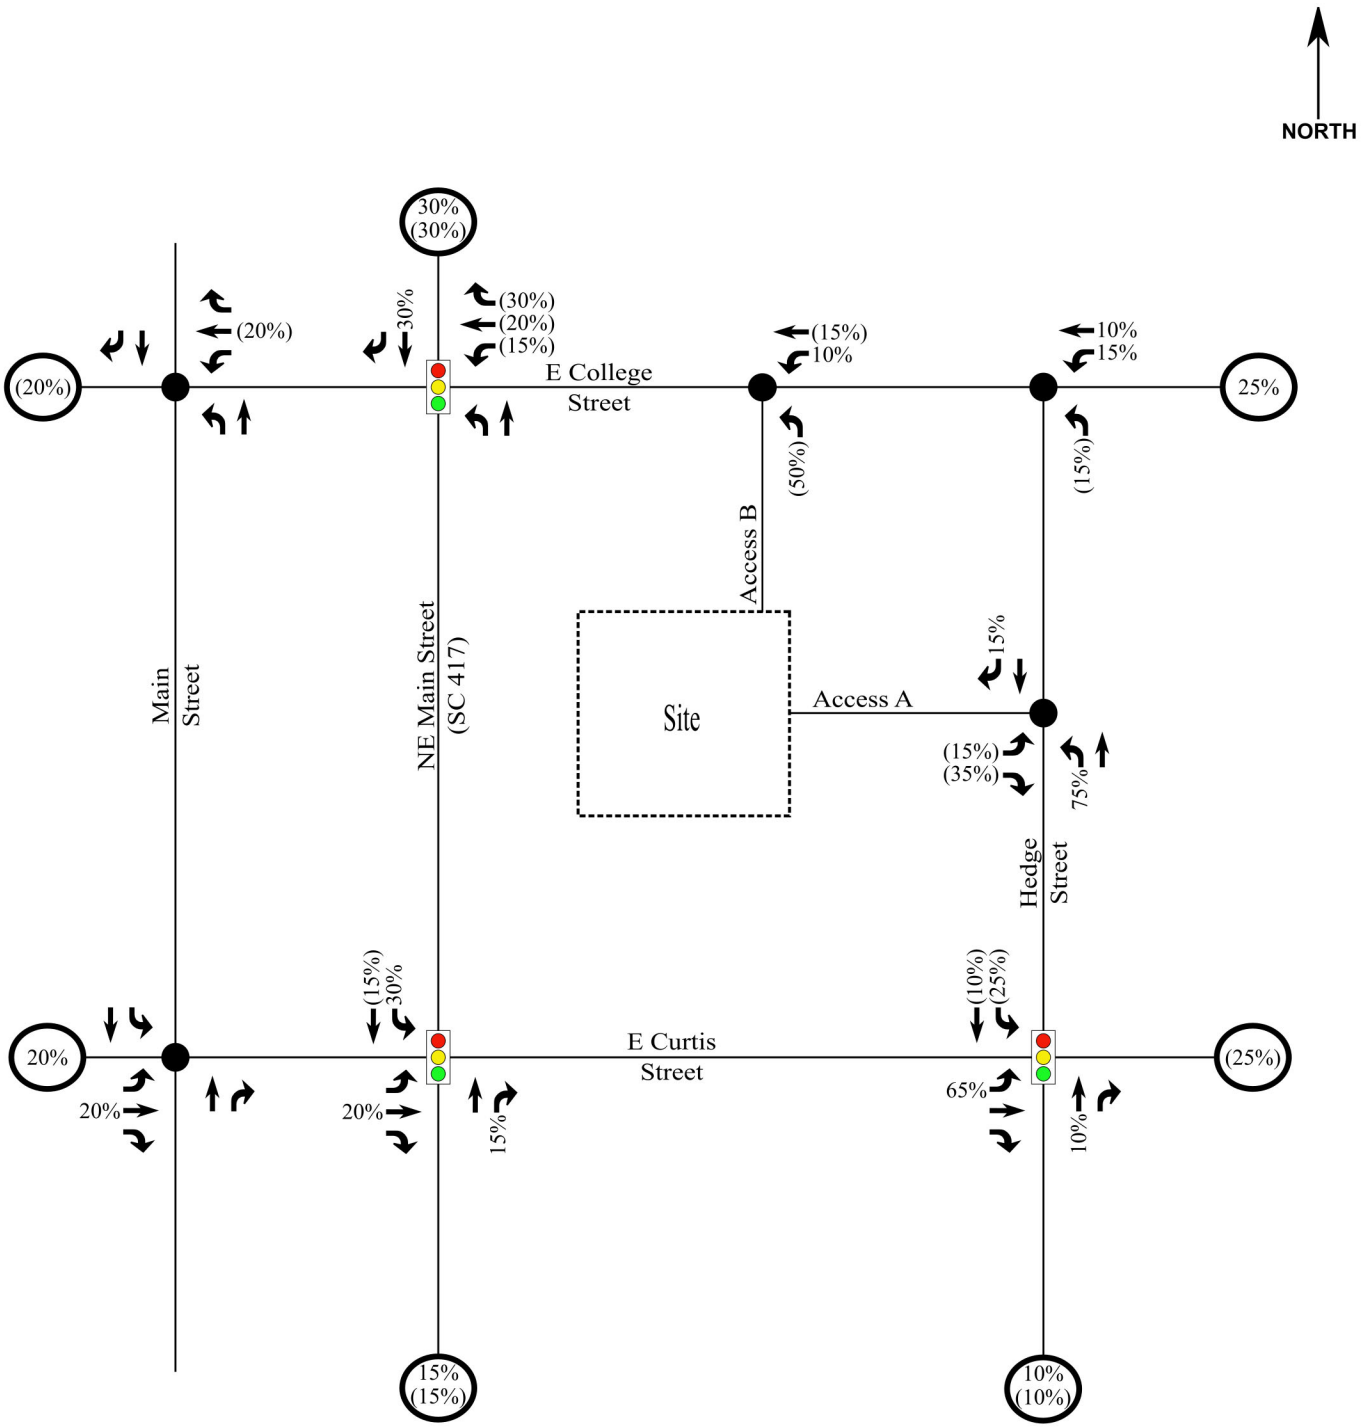

LEGEND


- Signalized Intersection
- Unsignalized Intersection
- X% → Entering Trip Distribution
- (Y%) → Exiting Trip Distribution
- X% Regional Trip Distribution

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Site Trip Distribution

Scale: Not to Scale	Figure	9

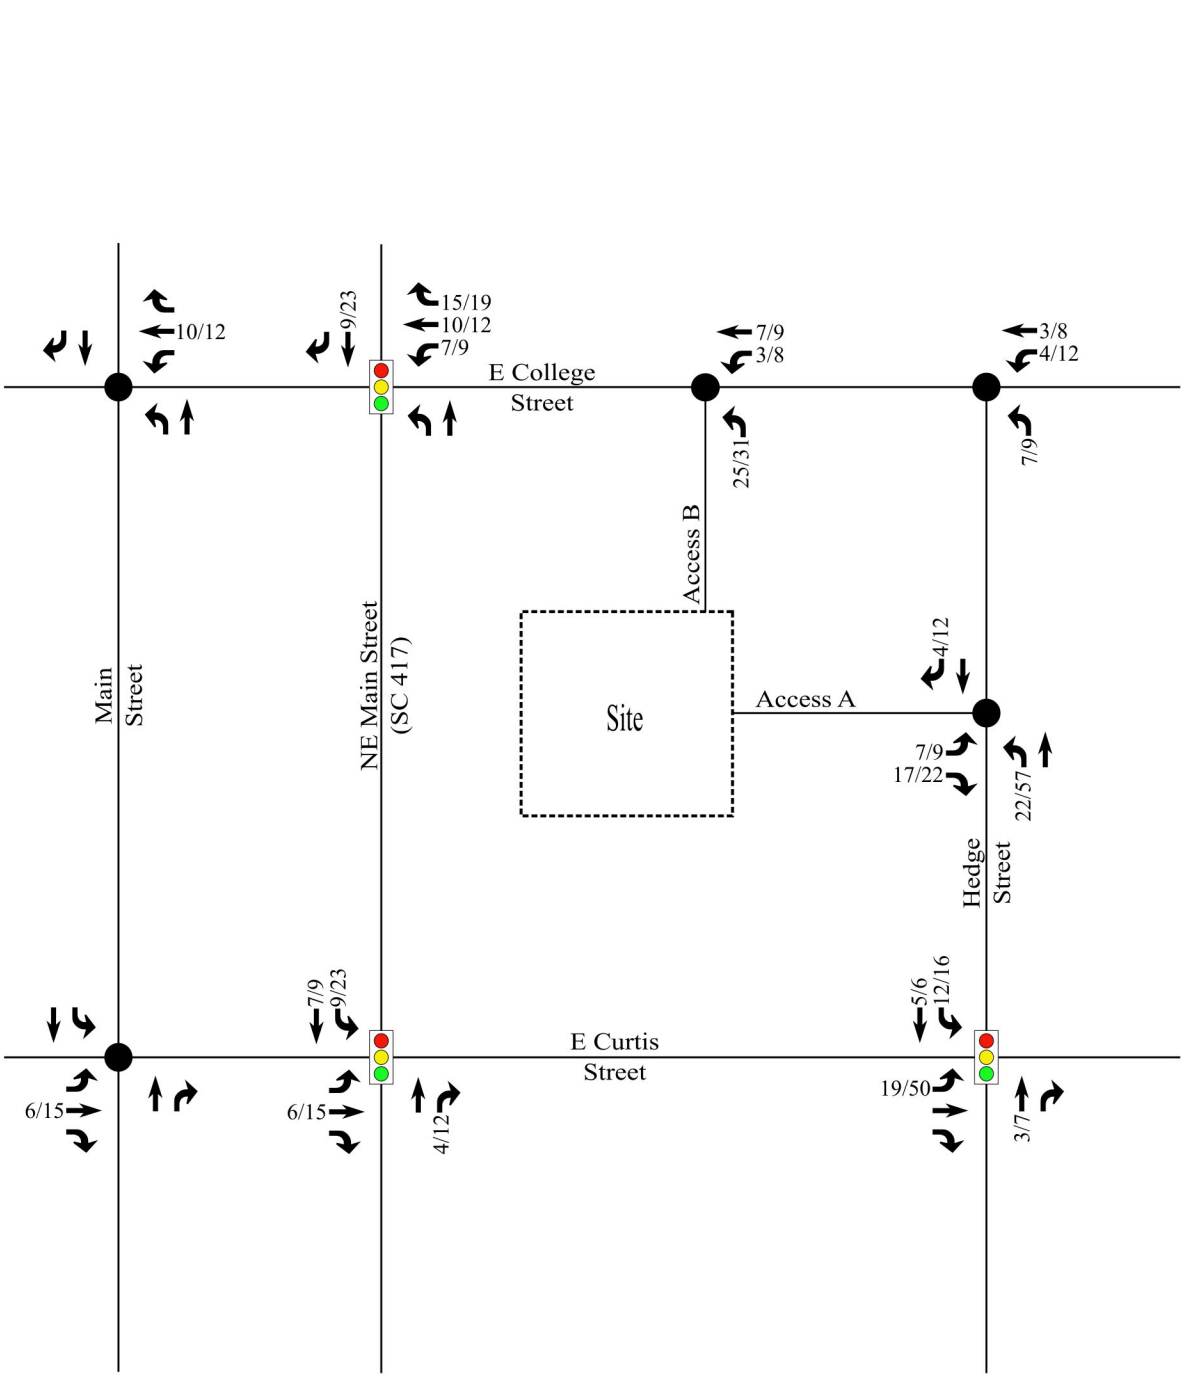

LEGEND


- Signalized Intersection
- Unsignalized Intersection
- X / Y → AM / PM Site Trips

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Trip Assignments

Scale: Not to Scale	Figure	10

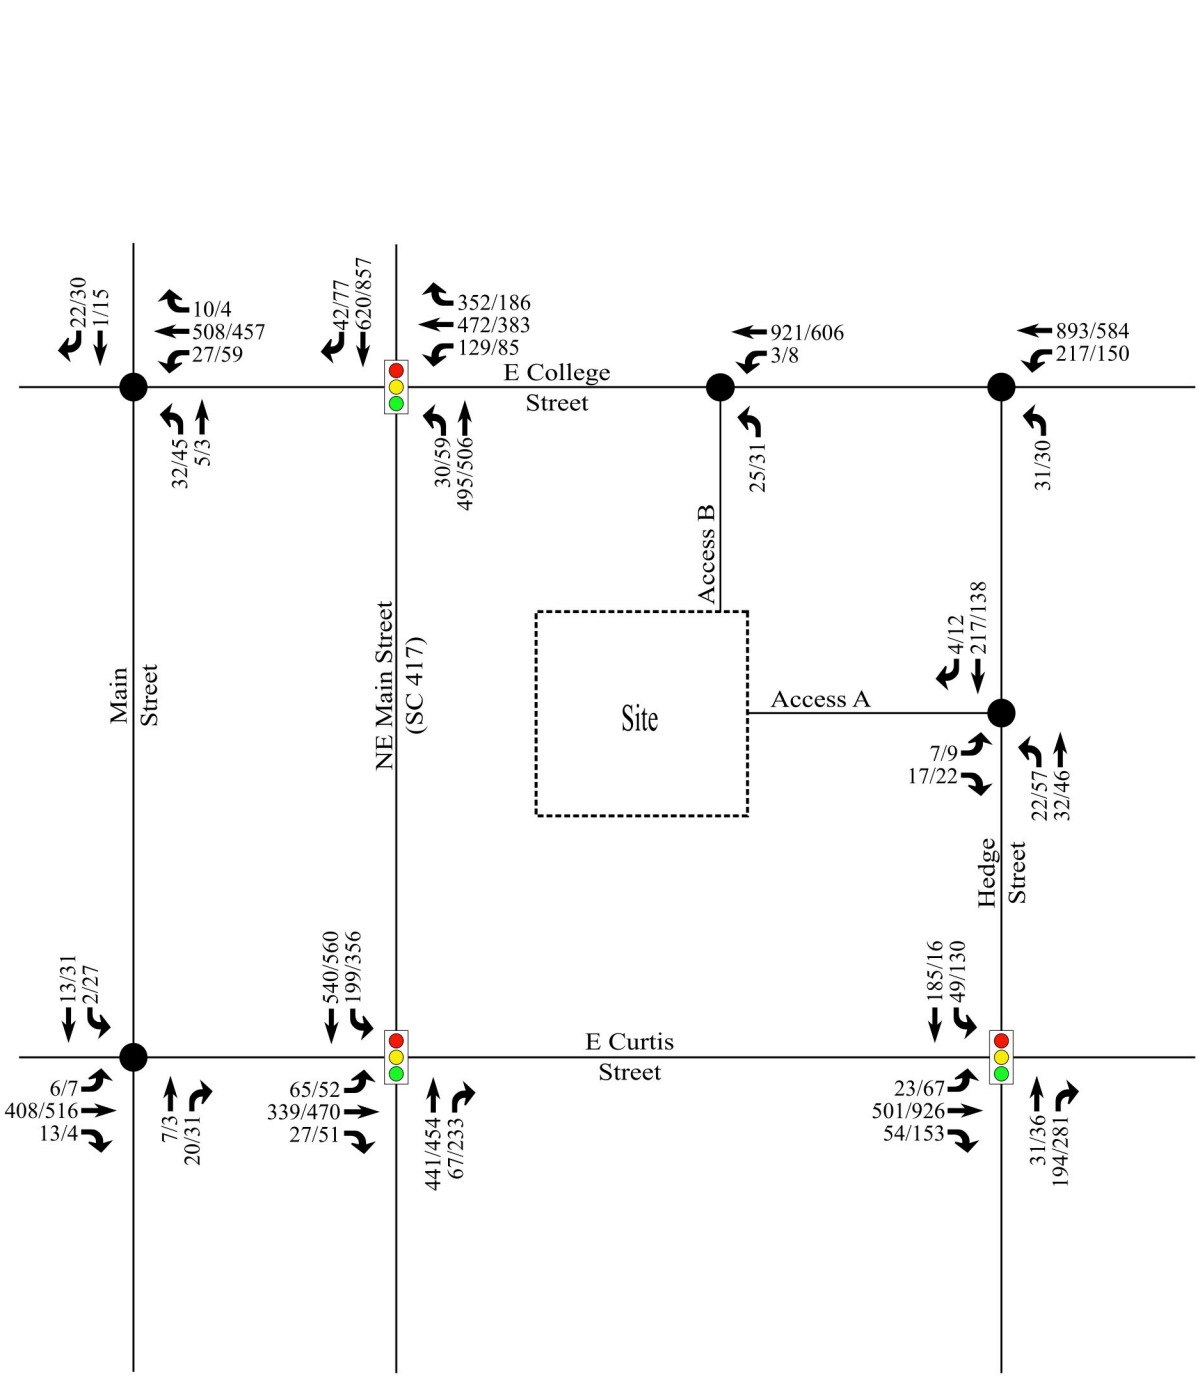

LEGEND

- Signalized Intersection
- Unsignalized Intersection
- X / Y → AM / PM Peak Hour Traffic

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Build (2028)
Traffic Volumes

Scale: Not to Scale	Figure	11

3. TRAFFIC IMPACT ANALYSIS

3.1. Turn Lane Analysis

A turn lane analysis was conducted at the site accesses utilizing the Build (2028) volumes. Based on build-out volumes, there are no turn lanes warranted at the site accesses.

Refer to Appendix B for the turn lane warrants with the volumes graphed.

3.2. Intersection LOS Analysis

Using the existing, no-build, and build traffic volumes, intersection analyses were conducted for the study intersections under Existing (2025) conditions, No-Build (2028) conditions and Build (2028) conditions. This analysis was conducted using the Transportation Research Board's *Highway Capacity Manual (HCM 6th Edition)* methodologies of the *Synchro*, Version 11 software.

Intersection level of service (LOS) grades range from LOS A to LOS F, which are directly related to the level of control delay at the intersection and characterize the operational conditions of the intersection traffic flow. LOS A operations typically represent ideal, free-flow conditions where vehicles experience little to no delays, and LOS F operations typically represent poor, forced-flow (bumper-to-bumper) conditions with high vehicular delays, and are generally considered undesirable. Table 3 summarizes the *HCM 6th Edition* control delay thresholds associated with each LOS grade for signalized and unsignalized intersections.

Table 3 – *HCM 6th Edition* LOS Criteria for Signalized & Unsignalized Intersections

Signalized Intersections		Unsignalized Intersections	
LOS	**Control Delay per Vehicle (seconds)**	**LOS**	**Control Delay per Vehicle (seconds)**
A	≤ 10	A	≤ 10
B	> 10 and ≤ 20	B	> 10 and ≤ 15
C	> 20 and ≤ 35	C	> 15 and ≤ 25
D	> 35 and ≤ 55	D	> 25 and ≤ 35
E	> 55 and ≤ 80	E	> 35 and ≤ 50
F	> 85	F	> 50

The results of the capacity analysis for the study intersections under existing traffic control are summarized in Table 4. Refer to Appendix C for the detailed capacity analysis reports and Appendix D for the queuing analysis results.


Table 4 – Intersection Capacity Analysis Results

Intersections	Approach	LOS (Delay in seconds per vehicle)					
		Existing (2025)		No-Build (2028)		Build (2028)	
		AM	PM	AM	PM	AM	PM
NE Main Street (SC 417) & College Street	EB	C (26.0)	D (45.0)	*Analyzed under Existing conditions only*			
	WB	D (45.5)	E (56.8)	D (38.0)	D (48.6)	D (39.8)	D (52.9)
	NB	B (18.5)	A (9.8)	A (4.0)	A (3.0)	A (4.1)	A (3.6)
	SB	B (19.3)	B (14.2)	C (25.8)	C (30.5)	C (26.5)	C (34.0)
	Overall	C (26.4)	C (23.4)	C (25.7)	C (28.4)	C (26.9)	C (31.8)
NE Main Street (SC 417) & Curtis Street	EB	C (30.0)	D (54.0)	D (43.9)	D (54.0)	D (44.0)	D (54.9)
	WB	C (29.5)	D (46.8)	*Analyzed under Existing conditions only*			
	NB	C (23.5)	C (20.4)	B (18.2)	C (34.1)	B (18.4)	D (36.3)
	SB	A (6.8)	B (10.6)	A (2.5)	A (9.1)	A (2.6)	B (13.0)
	Overall	C (20.1)	C (25.6)	B (18.0)	C (28.9)	B (18.0)	C (31.4)
Hedge Street & College Street	EB	-	-	*Analyzed under Existing conditions only*			
	WB	A (8.0)	A (8.6)	-	-	-	-
	NB	B (12.0)	B (12.6)	C (21.0)	B (14.2)	C (21.8)	B (14.9)
Hedge Street & Curtis Street	EB	A (8.8)	B (17.2)	A (6.9)	B (10.2)	A (7.6)	B (11.2)
	WB	B (19.1)	B (19.8)	*Analyzed under Existing conditions only*			
	NB	D (42.7)	D (44.6)	B (19.6)	D (38.3)	B (19.9)	D (41.1)
	SB	D (50.8)	D (51.3)	D (49.8)	D (51.2)	D (49.5)	D (52.4)
	Overall	C (25.3)	C (27.9)	B (19.0)	B (19.2)	B (19.7)	C (20.8)
Main Street & College Street	EB	A (7.7)	A (7.6)	*Analyzed under Existing conditions only*			
	WB	A (7.6)	A (7.8)	-	-	-	-
	NB	A (9.2)	B (10.9)	B (12.2)	B (13.1)	B (12.3)	B (13.2)
	SB	A (9.8)	B (10.7)	B (10.4)	B (11.8)	B (10.5)	B (11.9)
Main Street & Curtis Street	EB	A (7.8)	A (7.8)	-	-	-	-
	WB	A (7.8)	A (7.9)	*Analyzed under Existing conditions only*			
	NB	B (12.2)	B (11.7)	B (10.6)	B (10.6)	B (10.6)	B (10.7)
	SB	B (10.2)	B (11.7)	B (12.4)	B (13.4)	B (12.4)	B (13.6)
Hedge Street & Access A	EB	*Analyzed under Build conditions only*				B (10.0)	A (9.8)
	NB					A (7.8)	A (7.7)
	SB					-	-
College Street & Access B	WB	*Analyzed under Build conditions only*				-	-
	NB					B (12.8)	B (11.2)

The capacity analysis indicates that the signalized study intersections approaches are expected to maintain their LOS from No-Build to Build conditions, except for the northbound and southbound approach of NE Main Street (SC 417) and Curtis Street. Although, the approaches are expected to operate at LOS D or better in the Build scenario, which is still considered acceptable. Therefore, there is no mitigation recommended at the signalized intersections.

Additionally, the unsignalized study intersections are expected to operate at an LOS C or better in all scenarios. The site accesses are expected to operate at LOS B or better in the Build scenario. Therefore, there is no mitigation recommended at the study intersections based on the capacity analysis.

Figure 12 shows the proposed lane configurations and traffic control for the Build (2028) conditions.

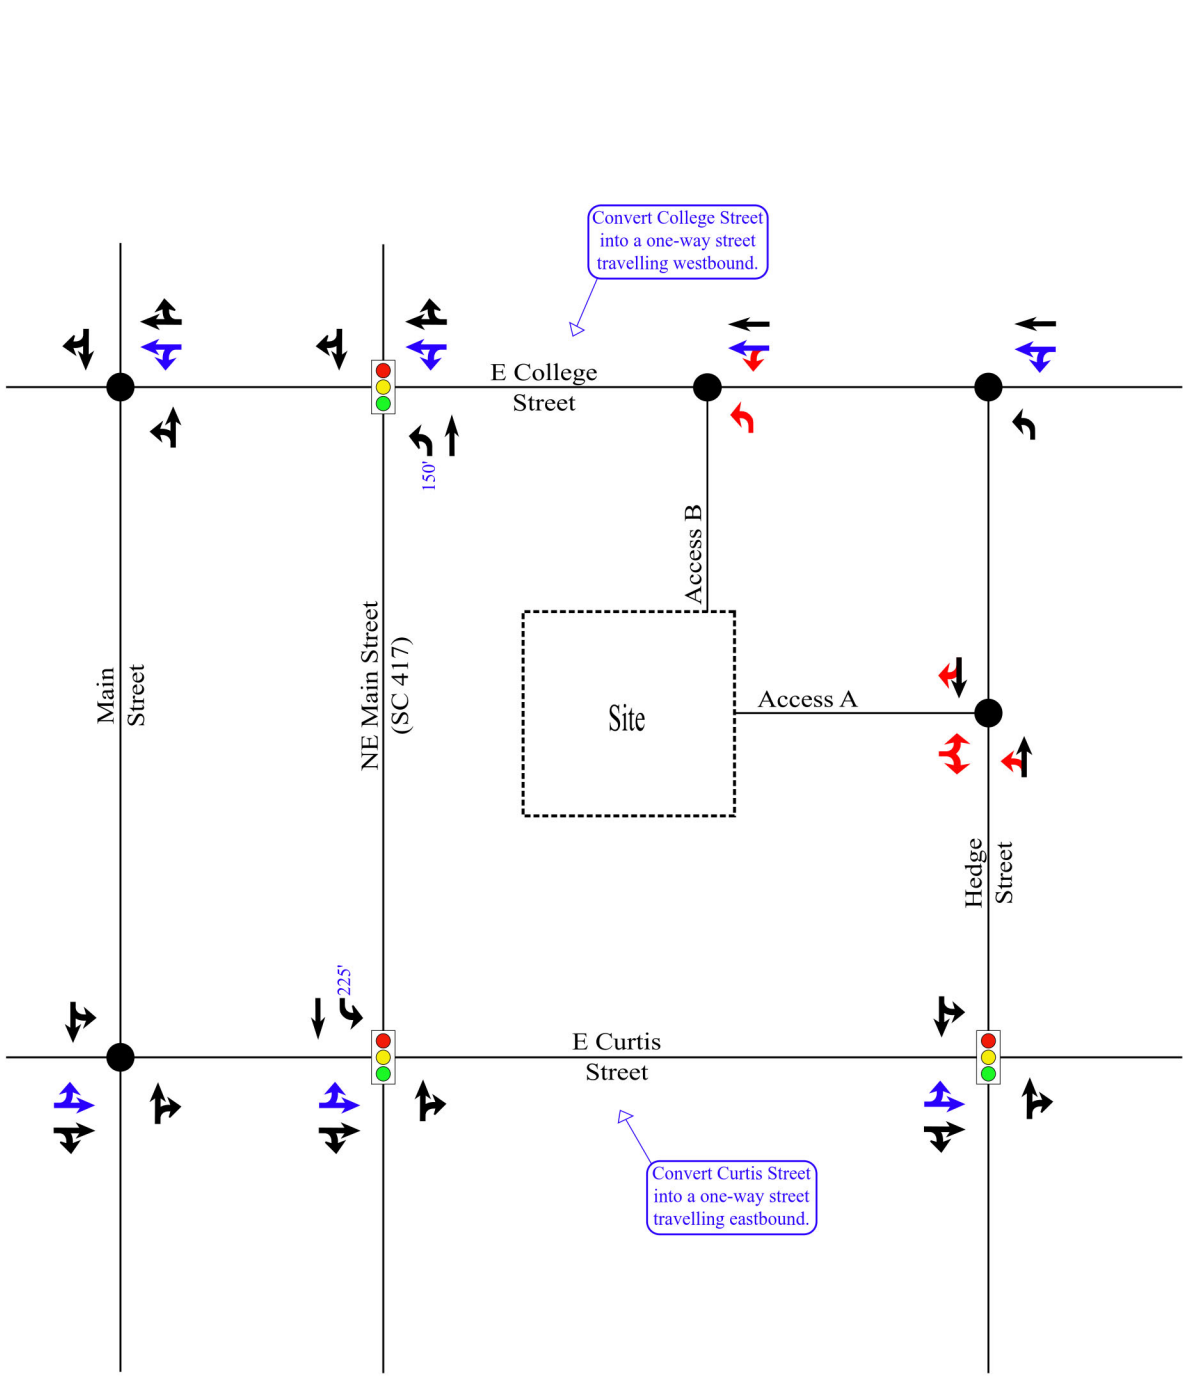

LEGEND

- Signalized Intersection
- Unsignalized Intersection
- Existing Lane
- Recommended Improvement
- Background Improvement
- X' Storage (In Feet)

IMPACT
Designs, Inc.

Burdette North
Simpsonville, SC

Proposed Lane Configurations and Traffic Control

Scale: Not to Scale	Figure	12

4. SUMMARY OF FINDINGS

A traffic impact study was conducted for the proposed Burdette North development in accordance with SCDOT guidelines. The proposed development is located on the southeast corner of College Street and NE Main Street (SC 417), in Simpsonville, South Carolina. The development is expected to consist of 12,812 square feet of retail and up to 80 multi-family units and is anticipated to be constructed by the end of 2028. Direct access to Burdette North development is proposed to be provided via two full movement connections: one on Hedge Street and one on College Street. The development is expected to have parallel parking along Hedge Street, however, to be conservative all traffic was assumed to access the site through the site accesses.

A turn lane analysis was conducted at the site accesses utilizing the Build (2028) volumes. Based on build-out volumes, there are no turn lanes warranted at the site accesses.

The capacity analysis indicates that the signalized study intersections approaches are expected to maintain their LOS from No-Build to Build conditions, except for the northbound and southbound approach of NE Main Street (SC 417) and Curtis Street. Although, the approaches are expected to operate at LOS D or better in the Build scenario, which is still considered acceptable. Therefore, there is no mitigation recommended at the signalized intersections.

Additionally, the unsignalized study intersections are expected to operate at an LOS C or better in all scenarios. The site accesses are expected to operate at LOS B or better in the Build scenario. Therefore, there is no mitigation recommended at the study intersections based on the capacity analysis.

<u>Recommendations:</u>

- None

TECHNICAL APPENDIX

APPENDIX A

TRAFFIC COUNT DATA

TRAFFIC DATA COLLECTION

File Name : Simpsonville(01 - SC 417 and College Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	SC 417 Southbound					College Street Westbound					SC 417 Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
07:00 AM	7	71	2	0	80	18	41	61	0	120	0	87	6	1	94	1	16	1	1	19	313
07:15 AM	12	80	2	0	94	17	37	68	1	123	2	126	4	0	132	4	28	1	4	37	386
07:30 AM	14	124	5	0	143	13	60	56	0	129	1	139	2	1	143	10	31	1	2	44	459
07:45 AM	14	121	4	0	139	15	54	50	0	119	2	154	2	0	158	15	29	1	1	46	462
Total	47	396	13	0	456	63	192	235	1	491	5	506	14	2	527	30	104	4	8	146	1620
08:00 AM	17	137	3	0	157	19	54	44	0	117	1	126	6	0	133	8	33	4	2	47	454
08:15 AM	16	133	7	0	156	17	32	46	0	95	2	133	6	0	141	3	32	6	1	42	434
08:30 AM	13	101	3	0	117	10	41	40	0	91	3	125	6	0	134	8	27	2	0	37	379
08:45 AM	18	102	4	0	124	8	40	41	0	89	2	118	4	0	124	15	27	2	0	44	381
Total	64	473	17	0	554	54	167	171	0	392	8	502	22	0	532	34	119	14	3	170	1648
Grand Total	111	869	30	0	1010	117	359	406	1	883	13	1008	36	2	1059	64	223	18	11	316	3268
Apprch %	11	86	3	0		13.3	40.7	46	0.1		1.2	95.2	3.4	0.2		20.3	70.6	5.7	3.5		
Total %	3.4	26.6	0.9	0	30.9	3.6	11	12.4	0	27	0.4	30.8	1.1	0.1	32.4	2	6.8	0.6	0.3	9.7	
Cars +	110	846	28	0	984	114	355	405	1	875	13	988	35	2	1038	63	218	18	11	310	3207
% Cars +	99.1	97.4	93.3	0	97.4	97.4	98.9	99.8	100	99.1	100	98	97.2	100	98	98.4	97.8	100	100	98.1	98.1
Trucks	1	23	2	0	26	3	4	1	0	8	0	20	1	0	21	1	5	0	0	6	61
% Trucks	0.9	2.6	6.7	0	2.6	2.6	1.1	0.2	0	0.9	0	2	2.8	0	2	1.6	2.2	0	0	1.9	1.9

TRAFFIC DATA COLLECTION

File Name : Simpsonville(01 - SC 417 and College Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	SC 417 Southbound					College Street Westbound					SC 417 Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:30 AM																					
07:30 AM	14	124	5	0	143	13	**60**	**56**	0	**129**	1	139	2	**1**	143	10	31	1	**2**	44	459
07:45 AM	14	121	4	0	139	15	54	50	0	119	**2**	**154**	2	0	**158**	**15**	29	1	1	46	**462**
08:00 AM	**17**	**137**	3	0	**157**	**19**	54	44	0	117	1	126	**6**	0	133	8	**33**	4	2	**47**	454
08:15 AM	16	133	**7**	0	156	17	32	46	0	95	2	133	6	0	141	3	32	**6**	1	42	434
Total Volume	61	515	19	0	595	64	200	196	0	460	6	552	16	1	575	36	125	12	6	179	1809
% App. Total	10.3	86.6	3.2	0		13.9	43.5	42.6	0		1	96	2.8	0.2		20.1	69.8	6.7	3.4		
PHF	.897	.940	.679	.000	.947	.842	.833	.875	.000	.891	.750	.896	.667	.250	.910	.600	.947	.500	.750	.952	.979
Cars +	61	498	17	0	576	62	198	195	0	455	6	541	16	1	564	36	122	12	6	176	1771
% Cars +	100	96.7	89.5	0	96.8	96.9	99.0	99.5	0	98.9	100	98.0	100	100	98.1	100	97.6	100	100	98.3	97.9
Trucks	0	17	2	0	19	2	2	1	0	5	0	11	0	0	11	0	3	0	0	3	38
% Trucks	0	3.3	10.5	0	3.2	3.1	1.0	0.5	0	1.1	0	2.0	0	0	1.9	0	2.4	0	0	1.7	2.1

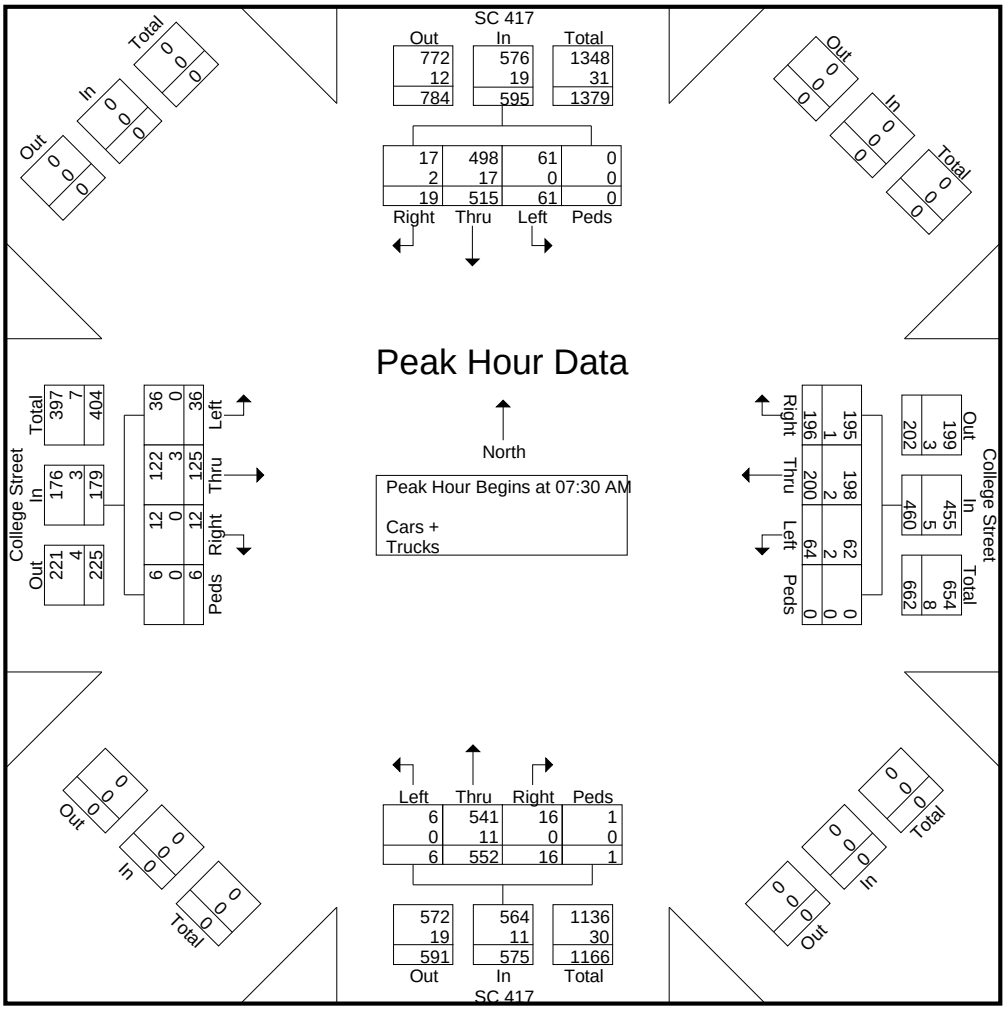

TRAFFIC DATA COLLECTION

File Name : Simpsonville(01 - SC 417 and College Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	SC 417 Southbound					College Street Westbound					SC 417 Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
04:00 PM	43	174	4	0	221	6	31	34	0	71	4	140	18	0	162	2	42	8	0	52	506
04:15 PM	30	155	7	0	192	11	44	25	0	80	3	129	22	0	154	8	43	9	0	60	486
04:30 PM	24	178	6	0	208	7	36	26	0	69	1	120	11	0	132	7	51	9	0	67	476
04:45 PM	32	145	5	0	182	12	37	28	1	78	3	123	20	0	146	8	42	7	0	57	463
Total	129	652	22	0	803	36	148	113	1	298	11	512	71	0	594	25	178	33	0	236	1931
05:00 PM	37	185	4	0	226	12	43	24	0	79	5	126	19	0	150	10	41	2	0	53	508
05:15 PM	38	146	3	2	189	6	38	23	1	68	2	110	16	0	128	4	51	10	0	65	450
05:30 PM	49	167	7	0	223	10	46	20	0	76	2	97	19	0	118	4	49	10	0	63	480
05:45 PM	53	153	5	0	211	11	31	16	0	58	5	114	24	0	143	2	67	6	0	75	487
Total	177	651	19	2	849	39	158	83	1	281	14	447	78	0	539	20	208	28	0	256	1925
Grand Total	306	1303	41	2	1652	75	306	196	2	579	25	959	149	0	1133	45	386	61	0	492	3856
Apprch %	18.5	78.9	2.5	0.1		13	52.8	33.9	0.3		2.2	84.6	13.2	0		9.1	78.5	12.4	0		
Total %	7.9	33.8	1.1	0.1	42.8	1.9	7.9	5.1	0.1	15	0.6	24.9	3.9	0	29.4	1.2	10	1.6	0	12.8	
Cars +	306	1296	41	2	1645	74	304	195	2	575	25	949	147	0	1121	45	386	60	0	491	3832
% Cars +	100	99.5	100	100	99.6	98.7	99.3	99.5	100	99.3	100	99	98.7	0	98.9	100	100	98.4	0	99.8	99.4
Trucks	0	7	0	0	7	1	2	1	0	4	0	10	2	0	12	0	0	1	0	1	24
% Trucks	0	0.5	0	0	0.4	1.3	0.7	0.5	0	0.7	0	1	1.3	0	1.1	0	0	1.6	0	0.2	0.6

TRAFFIC DATA COLLECTION

File Name : Simpsonville(01 - SC 417 and College Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	SC 417 Southbound					College Street Westbound					SC 417 Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 04:15 PM																					
04:15 PM	30	155	**7**	0	192	11	**44**	25	0	**80**	3	**129**	**22**	0	**154**	8	43	**9**	0	60	486
04:30 PM	24	178	6	0	208	7	36	26	0	69	1	120	11	0	132	7	**51**	9	0	**67**	476
04:45 PM	32	145	5	0	182	**12**	37	**28**	**1**	78	3	123	20	0	146	8	42	7	0	57	463
05:00 PM	**37**	**185**	4	0	**226**	12	43	24	0	79	**5**	126	19	0	150	**10**	41	2	0	53	**508**
Total Volume	123	663	22	0	808	42	160	103	1	306	12	498	72	0	582	33	177	27	0	237	1933
% App. Total	15.2	82.1	2.7	0		13.7	52.3	33.7	0.3		2.1	85.6	12.4	0		13.9	74.7	11.4	0		
PHF	.831	.896	.786	.000	.894	.875	.909	.920	.250	.956	.600	.965	.818	.000	.945	.825	.868	.750	.000	.884	.951
Cars +	123	659	22	0	804	41	160	103	1	305	12	493	72	0	577	33	177	27	0	237	1923
% Cars +	100	99.4	100	0	99.5	97.6	100	100	100	99.7	100	99.0	100	0	99.1	100	100	100	0	100	99.5
Trucks	0	4	0	0	4	1	0	0	0	1	0	5	0	0	5	0	0	0	0	0	10
% Trucks	0	0.6	0	0	0.5	2.4	0	0	0	0.3	0	1.0	0	0	0.9	0	0	0	0	0	0.5

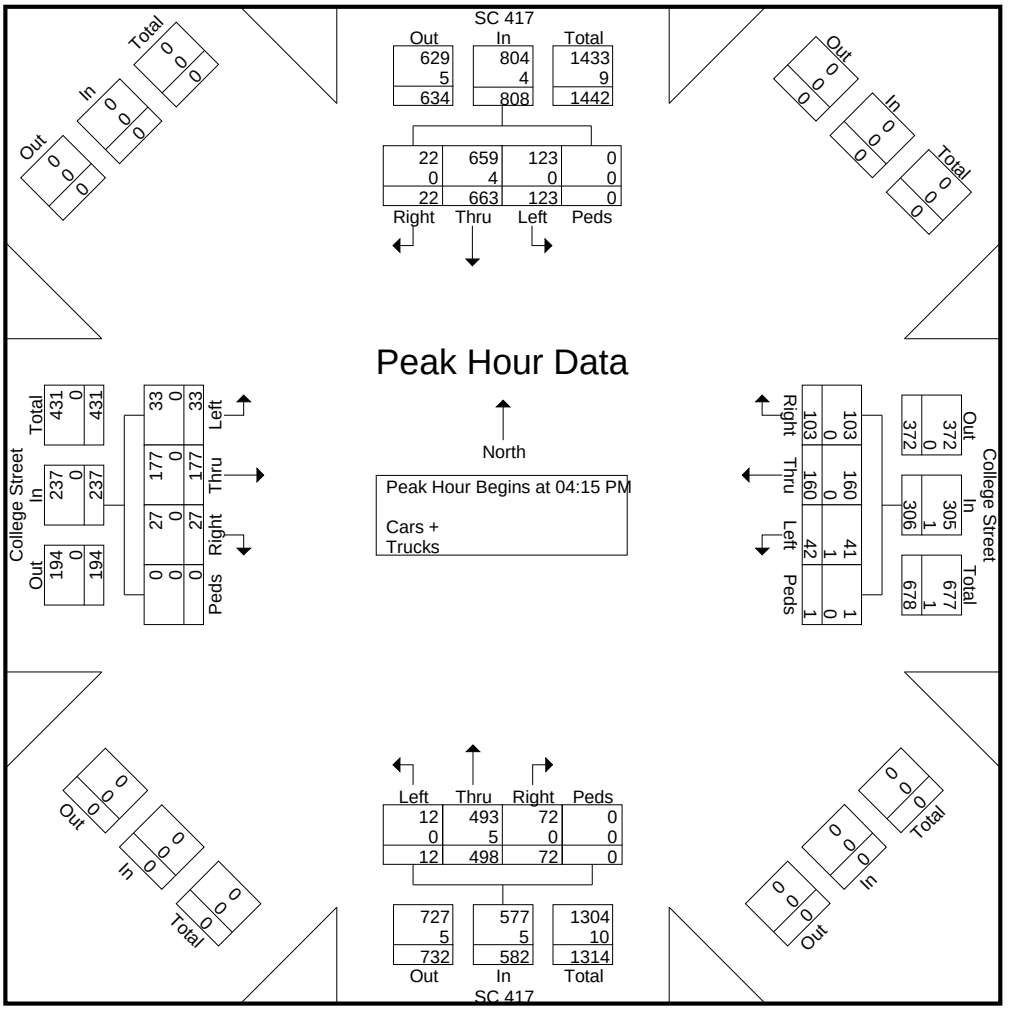

TRAFFIC DATA COLLECTION

File Name : Simpsonville(02 - SC 417 and Curtis Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	SC 417 Southbound					Curtis Street Westbound					SC 417 Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
07:00 AM	23	61	3	0	87	5	83	30	0	118	8	61	20	0	89	4	43	0	0	47	341
07:15 AM	30	73	2	0	105	9	88	27	1	125	10	102	17	0	129	2	38	1	0	41	400
07:30 AM	33	93	2	1	129	14	55	31	0	100	9	99	13	0	121	5	50	5	0	60	410
07:45 AM	25	103	8	0	136	10	61	43	0	114	3	97	6	0	106	12	44	3	0	59	415
Total	111	330	15	1	457	38	287	131	1	457	30	359	56	0	445	23	175	9	0	207	1566
08:00 AM	36	122	6	0	164	12	69	24	0	105	3	100	9	0	112	6	48	4	0	58	439
08:15 AM	24	124	5	0	153	15	50	24	0	89	7	114	15	0	136	2	47	1	0	50	428
08:30 AM	25	85	6	0	116	15	64	20	0	99	13	113	10	1	137	1	38	3	0	42	394
08:45 AM	28	79	6	0	113	15	54	16	0	85	6	100	6	1	113	10	40	6	0	56	367
Total	113	410	23	0	546	57	237	84	0	378	29	427	40	2	498	19	173	14	0	206	1628
Grand Total	224	740	38	1	1003	95	524	215	1	835	59	786	96	2	943	42	348	23	0	413	3194
Apprch %	22.3	73.8	3.8	0.1		11.4	62.8	25.7	0.1		6.3	83.4	10.2	0.2		10.2	84.3	5.6	0		
Total %	7	23.2	1.2	0	31.4	3	16.4	6.7	0	26.1	1.8	24.6	3	0.1	29.5	1.3	10.9	0.7	0	12.9	
Cars +	216	724	36	1	977	83	505	211	1	800	58	769	93	2	922	42	330	23	0	395	3094
% Cars +	96.4	97.8	94.7	100	97.4	87.4	96.4	98.1	100	95.8	98.3	97.8	96.9	100	97.8	100	94.8	100	0	95.6	96.9
Trucks	8	16	2	0	26	12	19	4	0	35	1	17	3	0	21	0	18	0	0	18	100
% Trucks	3.6	2.2	5.3	0	2.6	12.6	3.6	1.9	0	4.2	1.7	2.2	3.1	0	2.2	0	5.2	0	0	4.4	3.1

TRAFFIC DATA COLLECTION

File Name : Simpsonville(02 - SC 417 and Curtis Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	SC 417 Southbound					Curtis Street Westbound					SC 417 Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:30 AM																					
07:30 AM	33	93	2	**1**	129	14	55	31	0	100	**9**	99	13	0	121	5	**50**	**5**	0	**60**	410
07:45 AM	25	103	**8**	0	136	10	61	**43**	0	**114**	3	97	6	0	106	**12**	44	3	0	59	415
08:00 AM	**36**	122	6	0	**164**	12	**69**	24	0	105	3	100	9	0	112	6	48	4	0	58	**439**
08:15 AM	24	**124**	5	0	153	**15**	50	24	0	89	7	**114**	**15**	0	**136**	2	47	1	0	50	428
Total Volume	118	442	21	1	582	51	235	122	0	408	22	410	43	0	475	25	189	13	0	227	1692
% App. Total	20.3	75.9	3.6	0.2		12.5	57.6	29.9	0		4.6	86.3	9.1	0		11	83.3	5.7	0		
PHF	.819	.891	.656	.250	.887	.850	.851	.709	.000	.895	.611	.899	.717	.000	.873	.521	.945	.650	.000	.946	.964
Cars +	113	429	21	1	564	45	224	119	0	388	21	402	41	0	464	25	179	13	0	217	1633
% Cars +	95.8	97.1	100	100	96.9	88.2	95.3	97.5	0	95.1	95.5	98.0	95.3	0	97.7	100	94.7	100	0	95.6	96.5
Trucks	5	13	0	0	18	6	11	3	0	20	1	8	2	0	11	0	10	0	0	10	59
% Trucks	4.2	2.9	0	0	3.1	11.8	4.7	2.5	0	4.9	4.5	2.0	4.7	0	2.3	0	5.3	0	0	4.4	3.5

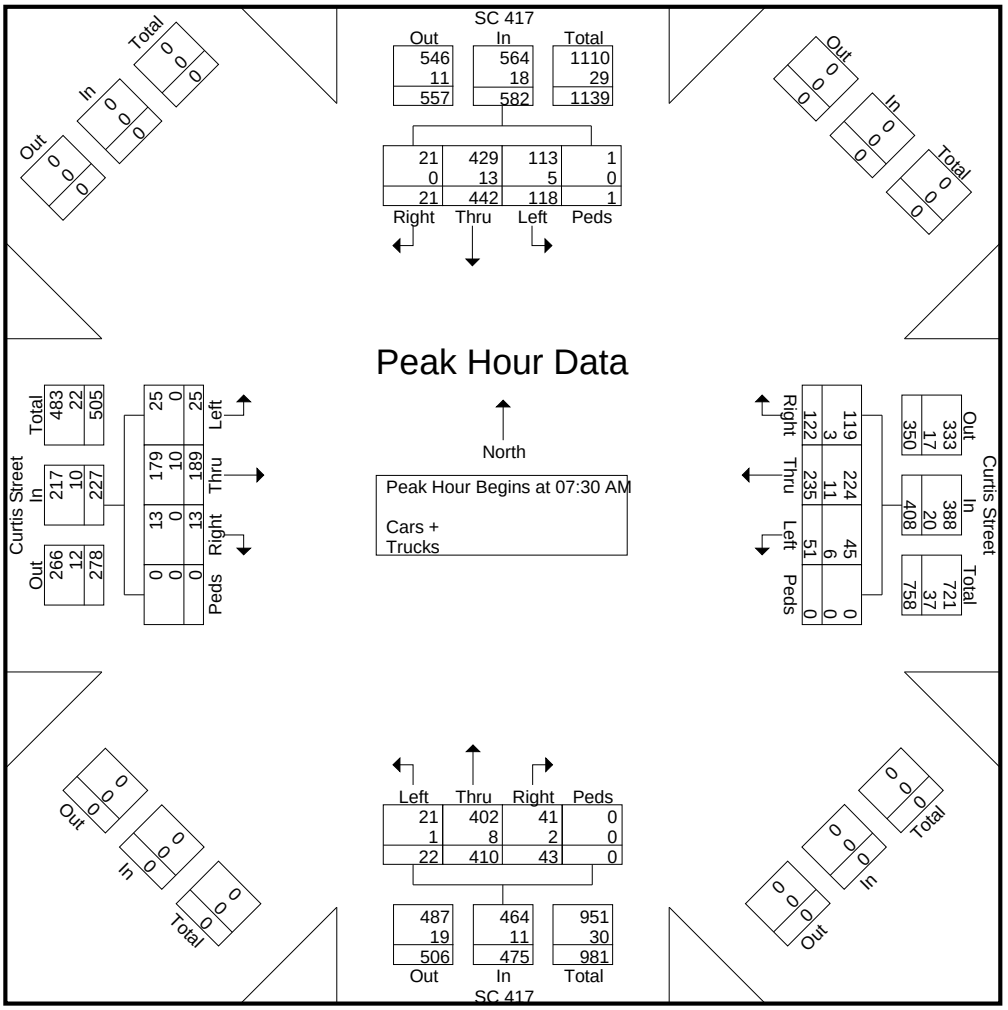

TRAFFIC DATA COLLECTION

File Name : Simpsonville(02 - SC 417 and Curtis Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	SC 417 Southbound					Curtis Street Westbound					SC 417 Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
04:00 PM	44	130	12	0	186	12	33	21	0	66	15	135	29	4	183	8	41	3	0	52	487
04:15 PM	53	120	7	0	180	4	52	16	0	72	10	127	25	1	163	3	55	6	0	64	479
04:30 PM	61	118	7	0	186	10	47	27	0	84	8	111	19	6	144	7	50	1	0	58	472
04:45 PM	52	101	11	0	164	15	37	15	3	70	10	125	26	0	161	4	47	11	0	62	457
Total	210	469	37	0	716	41	169	79	3	292	43	498	99	11	651	22	193	21	0	236	1895
05:00 PM	47	135	12	0	194	5	48	22	0	75	12	120	27	1	160	4	58	4	0	66	495
05:15 PM	47	101	8	0	156	11	40	9	1	61	12	113	39	5	169	3	65	5	0	73	459
05:30 PM	56	124	19	2	201	8	50	6	2	66	12	102	37	0	151	3	64	3	0	70	488
05:45 PM	41	105	12	0	158	6	52	17	5	80	8	121	33	5	167	6	65	9	0	80	485
Total	191	465	51	2	709	30	190	54	8	282	44	456	136	11	647	16	252	21	0	289	1927
Grand Total	401	934	88	2	1425	71	359	133	11	574	87	954	235	22	1298	38	445	42	0	525	3822
Apprch %	28.1	65.5	6.2	0.1		12.4	62.5	23.2	1.9		6.7	73.5	18.1	1.7		7.2	84.8	8	0		
Total %	10.5	24.4	2.3	0.1	37.3	1.9	9.4	3.5	0.3	15	2.3	25	6.1	0.6	34	1	11.6	1.1	0	13.7	
Cars +	398	928	88	2	1416	69	350	131	10	560	86	944	230	20	1280	38	437	42	0	517	3773
% Cars +	99.3	99.4	100	100	99.4	97.2	97.5	98.5	90.9	97.6	98.9	99	97.9	90.9	98.6	100	98.2	100	0	98.5	98.7
Trucks	3	6	0	0	9	2	9	2	1	14	1	10	5	2	18	0	8	0	0	8	49
% Trucks	0.7	0.6	0	0	0.6	2.8	2.5	1.5	9.1	2.4	1.1	1	2.1	9.1	1.4	0	1.8	0	0	1.5	1.3

TRAFFIC DATA COLLECTION

File Name : Simpsonville(02 - SC 417 and Curtis Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	SC 417 Southbound					Curtis Street Westbound					SC 417 Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	47	**135**	12	0	194	5	48	**22**	0	75	**12**	120	27	1	160	4	58	4	0	66	**495**
05:15 PM	47	101	8	0	156	**11**	40	9	1	61	12	113	**39**	**5**	**169**	3	**65**	5	0	73	459
05:30 PM	**56**	124	**19**	**2**	**201**	8	50	6	2	66	12	102	37	0	151	3	64	3	0	70	488
05:45 PM	41	105	12	0	158	6	**52**	17	**5**	**80**	8	**121**	33	5	167	**6**	65	**9**	0	**80**	485
Total Volume	191	465	51	2	709	30	190	54	8	282	44	456	136	11	647	16	252	21	0	289	1927
% App. Total	26.9	65.6	7.2	0.3		10.6	67.4	19.1	2.8		6.8	70.5	21	1.7		5.5	87.2	7.3	0		
PHF	.853	.861	.671	.250	.882	.682	.913	.614	.400	.881	.917	.942	.872	.550	.957	.667	.969	.583	.000	.903	.973
Cars +	189	463	51	2	705	30	185	52	7	274	43	453	135	9	640	16	248	21	0	285	1904
% Cars +	99.0	99.6	100	100	99.4	100	97.4	96.3	87.5	97.2	97.7	99.3	99.3	81.8	98.9	100	98.4	100	0	98.6	98.8
Trucks	2	2	0	0	4	0	5	2	1	8	1	3	1	2	7	0	4	0	0	4	23
% Trucks	1.0	0.4	0	0	0.6	0	2.6	3.7	12.5	2.8	2.3	0.7	0.7	18.2	1.1	0	1.6	0	0	1.4	1.2

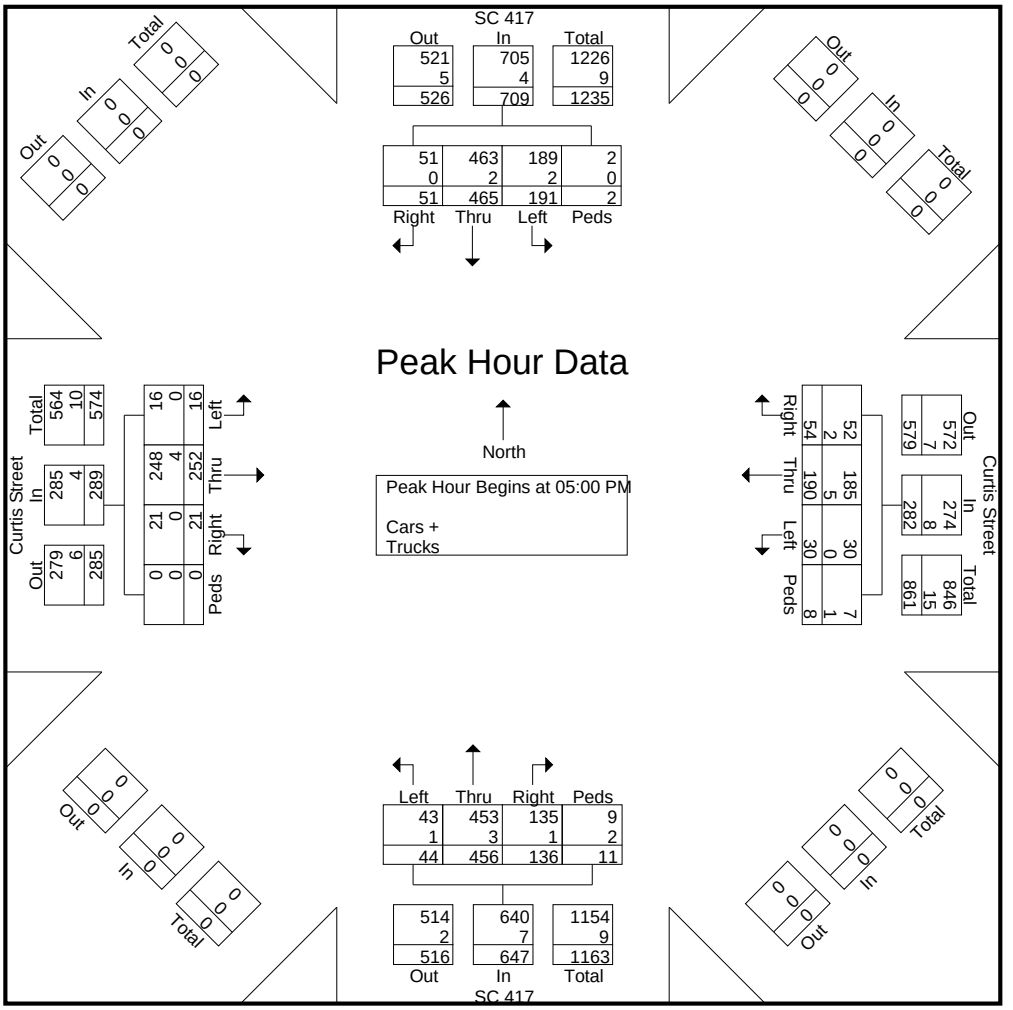



File Name : Simpsonville(03 - W. College Street and Main Street (DC)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Main Street Southbound				College Street Westbound				Main Street Northbound				College Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	0	0	0	0	0	0	1	1	0	0	0	0	1	0	0	1	2
07:15 AM	0	0	1	1	0	0	3	3	0	0	0	0	0	0	0	0	4
07:30 AM	0	0	1	1	0	0	1	1	0	0	0	0	1	0	0	1	3
07:45 AM	0	0	3	3	2	0	1	3	0	0	2	2	0	0	0	0	8
Total	0	0	5	5	2	0	6	8	0	0	2	2	2	0	0	2	17
08:00 AM	1	0	3	4	0	0	1	1	0	0	2	2	0	0	0	0	7
08:15 AM	0	0	6	6	0	0	2	2	0	0	0	0	3	0	0	3	11
08:30 AM	0	0	3	3	4	0	3	7	0	0	1	1	1	0	0	1	12
08:45 AM	0	0	9	9	0	0	3	3	0	0	4	4	1	0	1	2	18
Total	1	0	21	22	4	0	9	13	0	0	7	7	5	0	1	6	48
Grand Total	1	0	26	27	6	0	15	21	0	0	9	9	7	0	1	8	65
Apprch %	3.7	0	96.3		28.6	0	71.4		0	0	100		87.5	0	12.5		
Total %	1.5	0	40	41.5	9.2	0	23.1	32.3	0	0	13.8	13.8	10.8	0	1.5	12.3	
Cars +	1	0	25	26	6	0	15	21	0	0	9	9	7	0	1	8	64
% Cars +	100	0	96.2	96.3	100	0	100	100	0	0	100	100	100	0	100	100	98.5
Trucks	0	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	1
% Trucks	0	0	3.8	3.7	0	0	0	0	0	0	0	0	0	0	0	0	1.5

TRAFFIC DATA COLLECTION

File Name : Simpsonville(03 - W. College Street and Main Street (DC)
Site Code :
Start Date : 9/24/2025

	Main Street Southbound				College Street Westbound				Main Street Northbound				College Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	**1**	0	3	4	0	0	1	1	0	0	2	2	0	0	0	0	7
08:15 AM	0	0	6	6	0	0	2	2	0	0	0	0	**3**	0	0	**3**	11
08:30 AM	0	0	3	3	**4**	0	**3**	**7**	0	0	1	1	1	0	0	1	12
08:45 AM	0	0	**9**	**9**	0	0	3	3	0	0	**4**	**4**	1	0	**1**	2	**18**
Total Volume	1	0	21	22	4	0	9	13	0	0	7	7	5	0	1	6	48
% App. Total	4.5	0	95.5		30.8	0	69.2		0	0	100		83.3	0	16.7		
PHF	.250	.000	.583	.611	.250	.000	.750	.464	.000	.000	.438	.438	.417	.000	.250	.500	.667

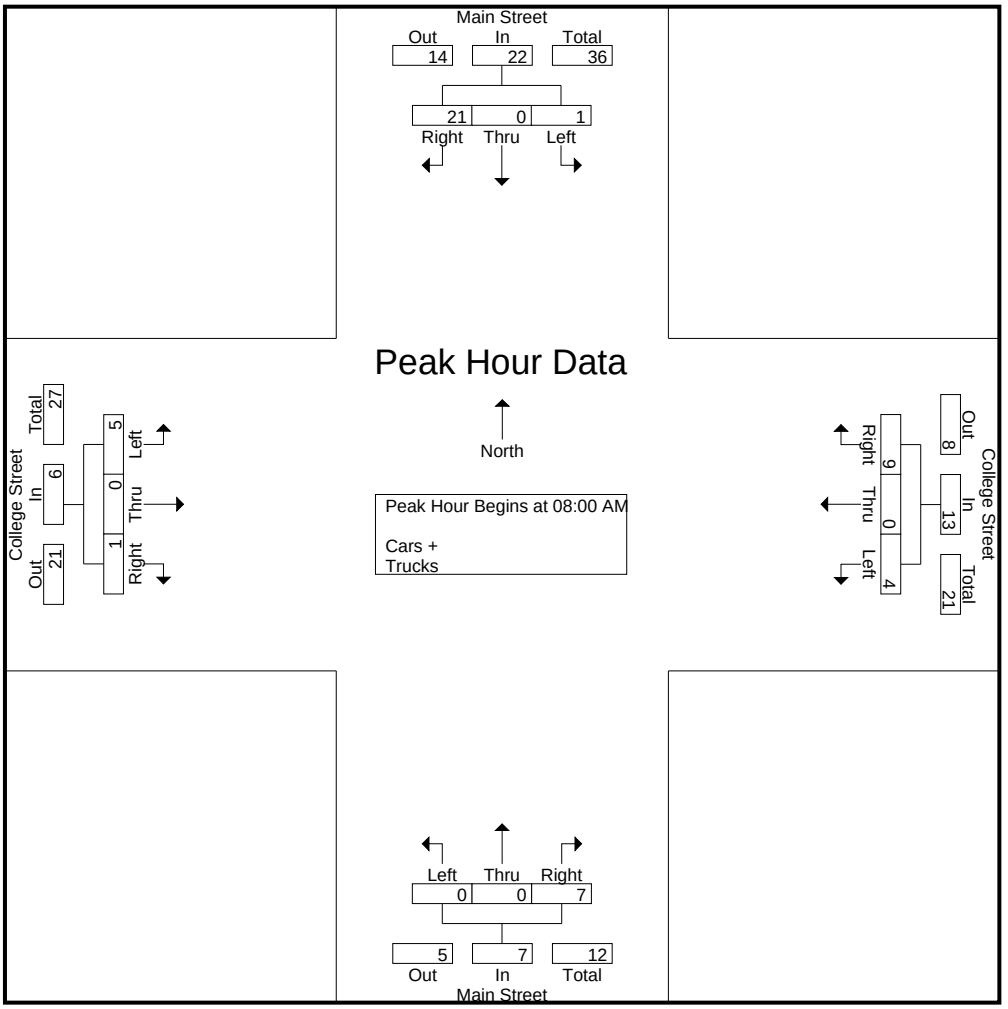



File Name : Simpsonville(03 - W. College Street and Main Street (DC)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Main Street Southbound				College Street Westbound				Main Street Northbound				College Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	1	0	4	5	0	0	1	1	1	0	3	4	0	0	2	2	12
04:15 PM	0	0	4	4	2	0	2	4	0	0	3	3	0	0	0	0	11
04:30 PM	5	0	7	12	4	0	2	6	1	0	4	5	0	0	1	1	24
04:45 PM	2	0	6	8	6	0	0	6	2	0	0	2	0	0	0	0	16
Total	8	0	21	29	12	0	5	17	4	0	10	14	0	0	3	3	63
05:00 PM	0	0	8	8	2	0	2	4	1	0	0	1	2	0	0	2	15
05:15 PM	7	0	7	14	3	0	0	3	0	0	2	2	1	0	1	2	21
05:30 PM	5	0	3	8	5	0	1	6	1	0	1	2	0	0	0	0	16
05:45 PM	2	0	0	2	4	0	0	4	4	0	3	7	0	0	0	0	13
Total	14	0	18	32	14	0	3	17	6	0	6	12	3	0	1	4	65
Grand Total	22	0	39	61	26	0	8	34	10	0	16	26	3	0	4	7	128
Apprch %	36.1	0	63.9		76.5	0	23.5		38.5	0	61.5		42.9	0	57.1		
Total %	17.2	0	30.5	47.7	20.3	0	6.2	26.6	7.8	0	12.5	20.3	2.3	0	3.1	5.5	
Cars +	21	0	39	60	26	0	8	34	10	0	16	26	3	0	4	7	127
% Cars +	95.5	0	100	98.4	100	0	100	100	100	0	100	100	100	0	100	100	99.2
Trucks	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	1
% Trucks	4.5	0	0	1.6	0	0	0	0	0	0	0	0	0	0	0	0	0.8

TRAFFIC DATA COLLECTION

File Name : Simpsonville(03 - W. College Street and Main Street (DC)
Site Code :
Start Date : 9/24/2025

	Main Street Southbound				College Street Westbound				Main Street Northbound				College Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 04:30 PM																	
04:30 PM	5	0	7	12	4	0	**2**	**6**	1	0	**4**	**5**	0	0	**1**	1	**24**
04:45 PM	2	0	6	8	**6**	0	0	6	**2**	0	0	2	0	0	0	0	16
05:00 PM	0	0	**8**	8	2	0	2	4	1	0	0	1	**2**	0	0	**2**	15
05:15 PM	**7**	0	7	**14**	3	0	0	3	0	0	2	2	1	0	1	2	21
Total Volume	14	0	28	42	15	0	4	19	4	0	6	10	3	0	2	5	76
% App. Total	33.3	0	66.7		78.9	0	21.1		40	0	60		60	0	40		
PHF	.500	.000	.875	.750	.625	.000	.500	.792	.500	.000	.375	.500	.375	.000	.500	.625	.792

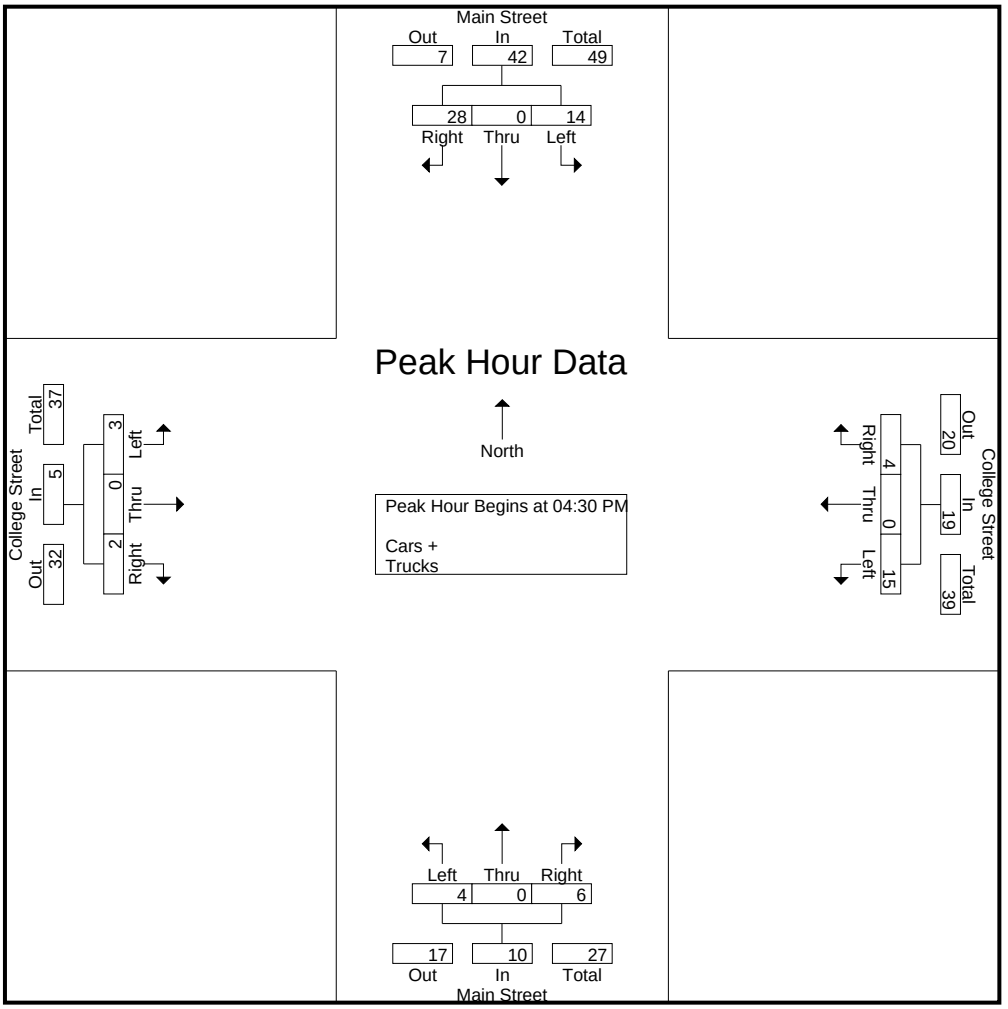

TRAFFIC DATA COLLECTION

File Name : Simpsonville(04 - W. Curtis Street and N. Main Street (DC) (1)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Main Street Southbound				Curtis Street Westbound				Main Street Northbound				Curtis Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
07:00 AM	0	0	0	0	0	0	0	0	1	0	0	1	0	0	1	1	2
07:15 AM	0	0	3	3	1	0	0	1	4	0	0	4	0	0	0	0	8
07:30 AM	0	0	0	0	0	0	1	1	4	0	4	8	0	0	0	0	9
07:45 AM	2	0	5	7	1	0	1	2	5	0	1	6	1	0	2	3	18
Total	2	0	8	10	2	0	2	4	14	0	5	19	1	0	3	4	37
08:00 AM	0	0	5	5	4	0	0	4	2	0	3	5	0	0	4	4	18
08:15 AM	0	0	2	2	2	0	1	3	2	0	0	2	0	0	1	1	8
08:30 AM	0	0	6	6	3	0	2	5	2	0	0	2	1	0	4	5	18
08:45 AM	1	0	3	4	4	0	5	9	8	0	9	17	0	0	2	2	32
Total	1	0	16	17	13	0	8	21	14	0	12	26	1	0	11	12	76
Grand Total	3	0	24	27	15	0	10	25	28	0	17	45	2	0	14	16	113
Apprch %	11.1	0	88.9		60	0	40		62.2	0	37.8		12.5	0	87.5		
Total %	2.7	0	21.2	23.9	13.3	0	8.8	22.1	24.8	0	15	39.8	1.8	0	12.4	14.2	
Cars +	3	0	23	26	15	0	10	25	28	0	17	45	2	0	14	16	112
% Cars +	100	0	95.8	96.3	100	0	100	100	100	0	100	100	100	0	100	100	99.1
Trucks	0	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	1
% Trucks	0	0	4.2	3.7	0	0	0	0	0	0	0	0	0	0	0	0	0.9

TRAFFIC DATA COLLECTION

File Name : Simpsonville(04 - W. Curtis Street and N. Main Street (DC) (1)
Site Code :
Start Date : 9/24/2025
Page No : 2

	Main Street Southbound				Curtis Street Westbound				Main Street Northbound				Curtis Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 08:00 AM																	
08:00 AM	0	0	5	5	**4**	0	0	4	2	0	3	5	0	0	**4**	4	18
08:15 AM	0	0	2	2	2	0	1	3	2	0	0	2	0	0	1	1	8
08:30 AM	0	0	**6**	**6**	3	0	2	5	2	0	0	2	**1**	0	4	**5**	18
08:45 AM	**1**	0	3	4	4	0	**5**	**9**	**8**	0	**9**	**17**	0	0	2	2	**32**
Total Volume	1	0	16	17	13	0	8	21	14	0	12	26	1	0	11	12	76
% App. Total	5.9	0	94.1		61.9	0	38.1		53.8	0	46.2		8.3	0	91.7		
PHF	.250	.000	.667	.708	.813	.000	.400	.583	.438	.000	.333	.382	.250	.000	.688	.600	.594

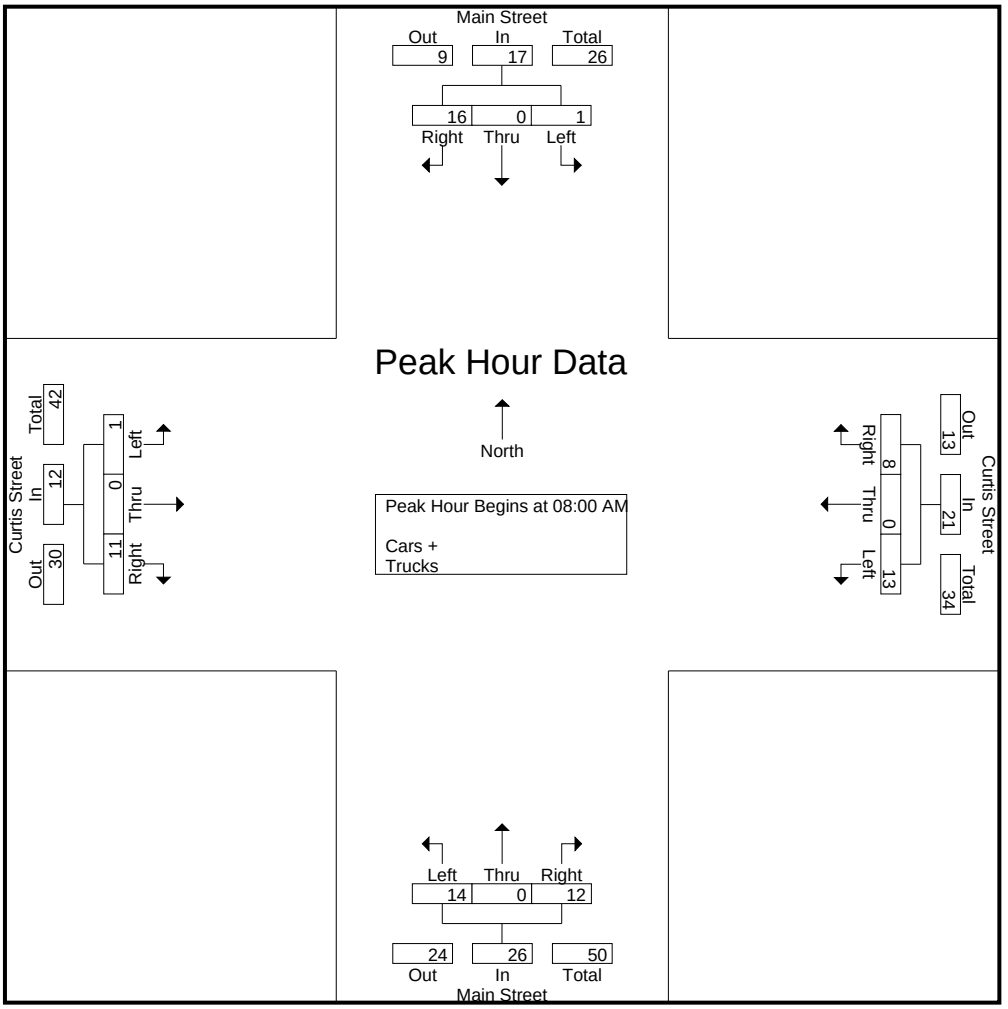

TRAFFIC DATA COLLECTION

File Name : Simpsonville(04 - W. Curtis Street and N. Main Street (DC) (1)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Main Street Southbound				Curtis Street Westbound				Main Street Northbound				Curtis Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
04:00 PM	1	0	7	8	5	0	2	7	6	0	3	9	1	0	1	2	26
04:15 PM	1	0	9	10	8	0	1	9	6	0	4	10	0	0	0	0	29
04:30 PM	4	0	5	9	9	0	3	12	1	0	3	4	0	0	1	1	26
04:45 PM	2	0	5	7	11	0	4	15	1	0	5	6	2	0	5	7	35
Total	8	0	26	34	33	0	10	43	14	0	15	29	3	0	7	10	116
05:00 PM	2	0	3	5	6	0	2	8	2	0	5	7	0	0	2	2	22
05:15 PM	0	0	10	10	6	0	4	10	1	0	4	5	3	0	0	3	28
05:30 PM	6	0	9	15	9	0	2	11	1	0	3	4	1	0	0	1	31
05:45 PM	3	0	7	10	10	0	2	12	5	0	11	16	0	0	0	0	38
Total	11	0	29	40	31	0	10	41	9	0	23	32	4	0	2	6	119
Grand Total	19	0	55	74	64	0	20	84	23	0	38	61	7	0	9	16	235
Apprch %	25.7	0	74.3		76.2	0	23.8		37.7	0	62.3		43.8	0	56.2		
Total %	8.1	0	23.4	31.5	27.2	0	8.5	35.7	9.8	0	16.2	26	3	0	3.8	6.8	
Cars +	19	0	55	74	64	0	20	84	23	0	38	61	7	0	8	15	234
% Cars +	100	0	100	100	100	0	100	100	100	0	100	100	100	0	88.9	93.8	99.6
Trucks	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1
% Trucks	0	0	0	0	0	0	0	0	0	0	0	0	0	0	11.1	6.2	0.4

TRAFFIC DATA COLLECTION

File Name : Simpsonville(04 - W. Curtis Street and N. Main Street (DC) (1)
Site Code :
Start Date : 9/24/2025
Page No : 2

	Main Street Southbound				Curtis Street Westbound				Main Street Northbound				Curtis Street Eastbound				
Start Time	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Left	Thru	Right	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																	
Peak Hour for Entire Intersection Begins at 05:00 PM																	
05:00 PM	2	0	3	5	6	0	2	8	2	0	5	7	0	0	**2**	2	22
05:15 PM	0	0	**10**	10	6	0	**4**	10	1	0	4	5	**3**	0	0	**3**	28
05:30 PM	**6**	0	9	**15**	9	0	2	11	1	0	3	4	1	0	0	1	31
05:45 PM	3	0	7	10	**10**	0	2	**12**	**5**	0	**11**	**16**	0	0	0	0	**38**
Total Volume	11	0	29	40	31	0	10	41	9	0	23	32	4	0	2	6	119
% App. Total	27.5	0	72.5		75.6	0	24.4		28.1	0	71.9		66.7	0	33.3		
PHF	.458	.000	.725	.667	.775	.000	.625	.854	.450	.000	.523	.500	.333	.000	.250	.500	.783

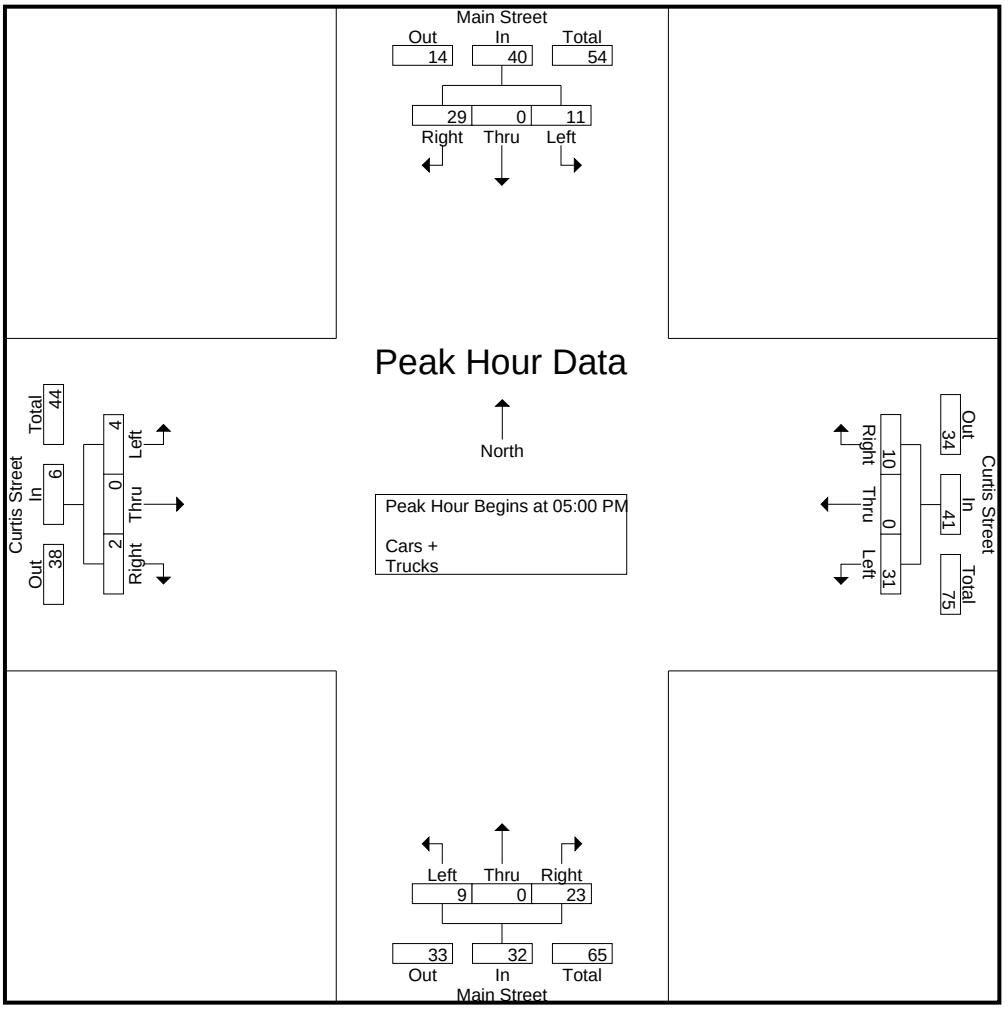



File Name : Simpsonville(05 - College St and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Commercial Access Southbound					College Street Westbound					Hedge Street Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
07:00 AM	0	0	0	0	0	6	117	0	0	123	4	0	5	1	10	0	22	6	0	28	161
07:15 AM	0	0	0	0	0	9	130	0	0	139	2	0	8	0	10	1	34	10	0	45	194
07:30 AM	0	0	0	0	0	9	129	0	0	138	0	0	10	1	11	0	31	16	0	47	196
07:45 AM	0	0	0	0	0	19	116	0	0	135	4	0	18	0	22	0	35	10	0	45	202
Total	0	0	0	0	0	43	492	0	0	535	10	0	41	2	53	1	122	42	0	165	753
08:00 AM	0	0	0	0	0	27	107	0	0	134	6	0	16	0	22	0	48	8	0	56	212
08:15 AM	0	0	0	0	0	62	90	0	0	152	2	0	10	0	12	1	39	13	0	53	217
08:30 AM	0	0	0	0	0	18	82	0	0	100	6	0	19	0	25	0	35	10	0	45	170
08:45 AM	0	0	0	0	0	10	83	0	0	93	7	1	11	0	19	1	29	19	0	49	161
Total	0	0	0	0	0	117	362	0	0	479	21	1	56	0	78	2	151	50	0	203	760
Grand Total	0	0	0	0	0	160	854	0	0	1014	31	1	97	2	131	3	273	92	0	368	1513
Apprch %	0	0	0	0		15.8	84.2	0	0		23.7	0.8	74	1.5		0.8	74.2	25	0		
Total %	0	0	0	0	0	10.6	56.4	0	0	67	2	0.1	6.4	0.1	8.7	0.2	18	6.1	0	24.3	
Cars +	0	0	0	0	0	160	846	0	0	1006	31	1	97	2	131	3	266	92	0	361	1498
% Cars +	0	0	0	0	0	100	99.1	0	0	99.2	100	100	100	100	100	100	97.4	100	0	98.1	99
Trucks	0	0	0	0	0	0	8	0	0	8	0	0	0	0	0	0	7	0	0	7	15
% Trucks	0	0	0	0	0	0	0.9	0	0	0.8	0	0	0	0	0	0	2.6	0	0	1.9	1

TRAFFIC DATA COLLECTION

File Name : Simpsonville(05 - College St and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	Commercial Access Southbound					College Street Westbound					Hedge Street Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:30 AM																					
07:30 AM	0	0	0	0	0	9	**129**	0	0	138	0	0	10	**1**	11	0	31	**16**	0	47	196
07:45 AM	0	0	0	0	0	19	116	0	0	135	4	0	**18**	0	**22**	0	35	10	0	45	202
08:00 AM	0	0	0	0	0	27	107	0	0	134	**6**	0	16	0	22	0	**48**	8	0	**56**	212
08:15 AM	0	0	0	0	0	**62**	90	0	0	**152**	2	0	10	0	12	**1**	39	13	0	53	**217**
Total Volume	0	0	0	0	0	117	442	0	0	559	12	0	54	1	67	1	153	47	0	201	827
% App. Total	0	0	0	0		20.9	79.1	0	0		17.9	0	80.6	1.5		0.5	76.1	23.4	0		
PHF	.000	.000	.000	.000	.000	.472	.857	.000	.000	.919	.500	.000	.750	.250	.761	.250	.797	.734	.000	.897	.953
Cars +	0	0	0	0	0	117	437	0	0	554	12	0	54	1	67	1	150	47	0	198	819
% Cars +	0	0	0	0	0	100	98.9	0	0	99.1	100	0	100	100	100	100	98.0	100	0	98.5	99.0
Trucks	0	0	0	0	0	0	5	0	0	5	0	0	0	0	0	0	3	0	0	3	8
% Trucks	0	0	0	0	0	0	1.1	0	0	0.9	0	0	0	0	0	0	2.0	0	0	1.5	1.0

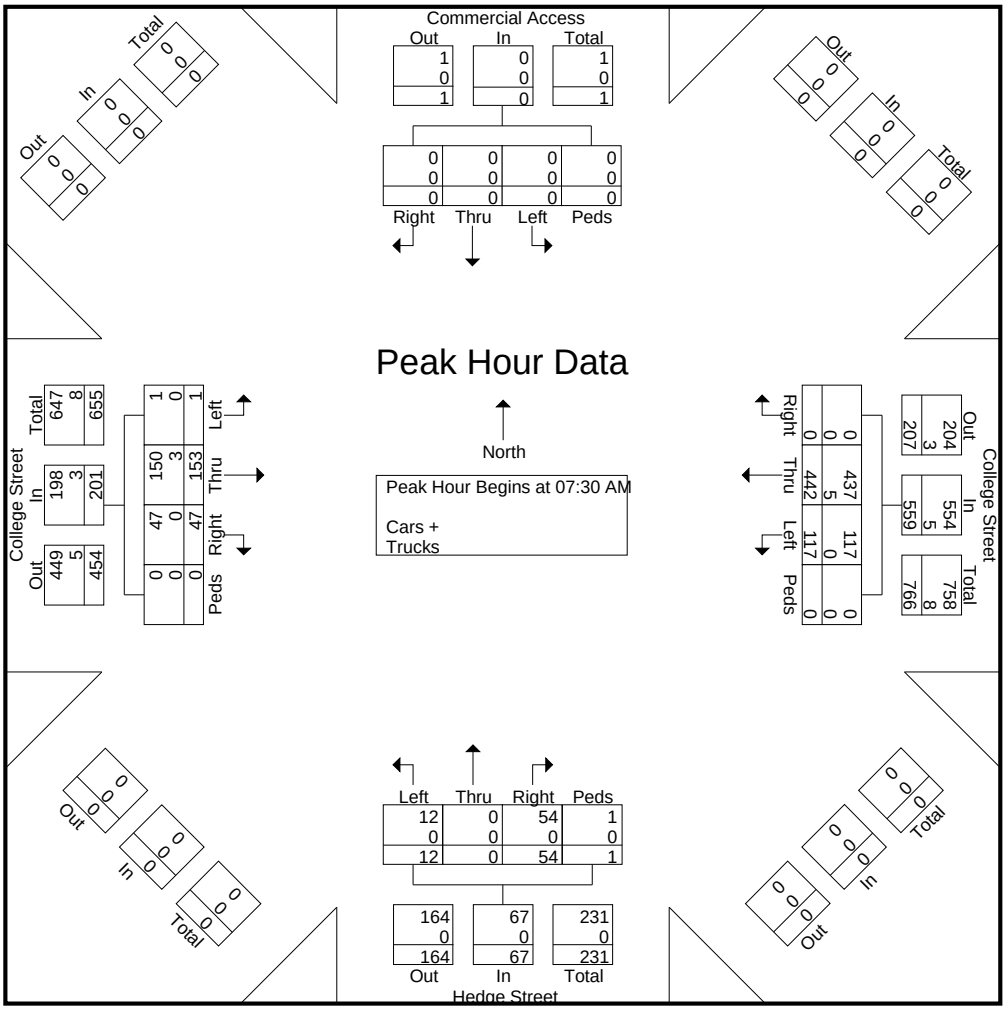

TRAFFIC DATA COLLECTION

File Name : Simpsonville(05 - College St and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Commercial Access Southbound					College Street Westbound					Hedge Street Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
04:00 PM	0	0	1	0	1	10	54	0	0	64	12	0	24	0	36	0	69	31	0	100	201
04:15 PM	0	0	1	0	1	16	80	0	0	96	5	0	14	0	19	1	60	34	0	95	211
04:30 PM	0	0	0	0	0	9	67	0	0	76	1	0	9	0	10	0	69	18	0	87	173
04:45 PM	0	0	0	0	0	17	73	0	0	90	3	0	15	0	18	1	67	23	0	91	199
Total	0	0	2	0	2	52	274	0	0	326	21	0	62	0	83	2	265	106	0	373	784
05:00 PM	0	0	3	0	3	8	77	0	0	85	0	0	19	0	19	0	70	28	0	98	205
05:15 PM	0	0	0	2	2	14	59	0	0	73	7	0	13	0	20	1	74	31	0	106	201
05:30 PM	0	0	1	0	1	11	74	0	0	85	1	0	16	0	17	1	78	35	0	114	217
05:45 PM	0	0	2	0	2	11	58	3	0	72	1	0	8	0	9	0	109	39	0	148	231
Total	0	0	6	2	8	44	268	3	0	315	9	0	56	0	65	2	331	133	0	466	854
Grand Total	0	0	8	2	10	96	542	3	0	641	30	0	118	0	148	4	596	239	0	839	1638
Apprch %	0	0	80	20		15	84.6	0.5	0		20.3	0	79.7	0		0.5	71	28.5	0		
Total %	0	0	0.5	0.1	0.6	5.9	33.1	0.2	0	39.1	1.8	0	7.2	0	9	0.2	36.4	14.6	0	51.2	
Cars +	0	0	8	2	10	96	538	3	0	637	30	0	118	0	148	4	595	238	0	837	1632
% Cars +	0	0	100	100	100	100	99.3	100	0	99.4	100	0	100	0	100	100	99.8	99.6	0	99.8	99.6
Trucks	0	0	0	0	0	0	4	0	0	4	0	0	0	0	0	0	1	1	0	2	6
% Trucks	0	0	0	0	0	0	0.7	0	0	0.6	0	0	0	0	0	0	0.2	0.4	0	0.2	0.4

TRAFFIC DATA COLLECTION

File Name : Simpsonville(05 - College St and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	Commercial Access Southbound					College Street Westbound					Hedge Street Northbound					College Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	0	0	**3**	0	**3**	8	**77**	0	0	**85**	0	0	**19**	0	19	0	70	28	0	98	205
05:15 PM	0	0	0	**2**	2	**14**	59	0	0	73	**7**	0	13	0	**20**	**1**	74	31	0	106	201
05:30 PM	0	0	1	0	1	11	74	0	0	85	1	0	16	0	17	1	78	35	0	114	217
05:45 PM	0	0	2	0	2	11	58	**3**	0	72	1	0	8	0	9	0	**109**	**39**	0	**148**	**231**
Total Volume	0	0	6	2	8	44	268	3	0	315	9	0	56	0	65	2	331	133	0	466	854
% App. Total	0	0	75	25		14	85.1	1	0		13.8	0	86.2	0		0.4	71	28.5	0		
PHF	.000	.000	.500	.250	.667	.786	.870	.250	.000	.926	.321	.000	.737	.000	.813	.500	.759	.853	.000	.787	.924
Cars +	0	0	6	2	8	44	266	3	0	313	9	0	56	0	65	2	331	133	0	466	852
% Cars +	0	0	100	100	100	100	99.3	100	0	99.4	100	0	100	0	100	100	100	100	0	100	99.8
Trucks	0	0	0	0	0	0	2	0	0	2	0	0	0	0	0	0	0	0	0	0	2
% Trucks	0	0	0	0	0	0	0.7	0	0	0.6	0	0	0	0	0	0	0	0	0	0	0.2

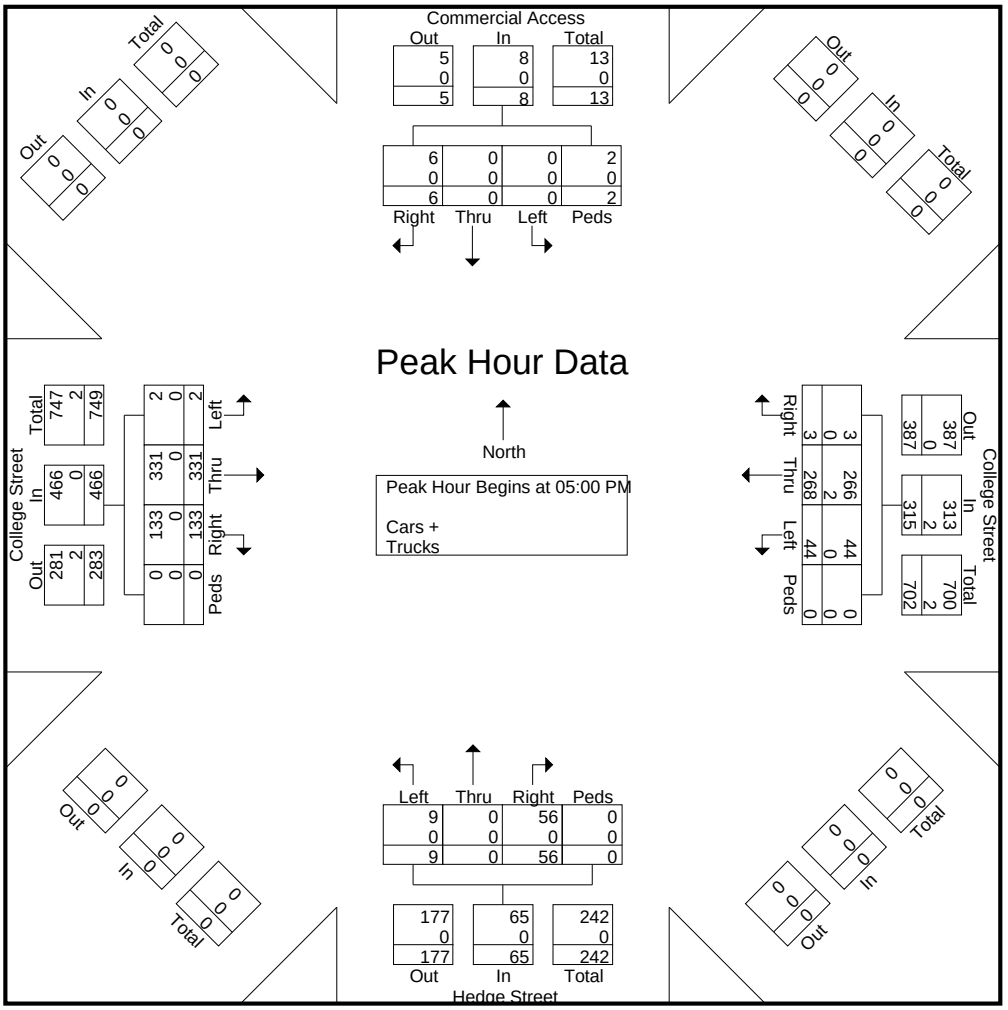



File Name : Simpsonville(06 - Curtis Street and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Hedge Street Southbound					Curtis Street Westbound					Hedge Street Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
07:00 AM	5	5	1	0	11	2	121	3	0	126	0	5	14	0	19	1	83	0	0	84	240
07:15 AM	9	6	1	0	16	4	119	1	0	124	0	9	18	0	27	1	81	1	0	83	250
07:30 AM	10	11	0	1	22	12	103	4	0	119	0	12	25	0	37	0	96	1	0	97	275
07:45 AM	14	25	2	0	41	14	109	5	0	128	2	17	30	0	49	2	70	3	0	75	293
Total	38	47	4	1	90	32	452	13	0	497	2	43	87	0	132	4	330	5	0	339	1058
08:00 AM	6	29	1	0	36	16	100	2	1	119	1	21	32	0	54	1	90	1	0	92	301
08:15 AM	7	66	1	0	74	24	91	3	1	119	0	10	25	0	35	0	87	0	0	87	315
08:30 AM	8	25	0	0	33	18	97	2	0	117	4	25	42	0	71	1	72	0	1	74	295
08:45 AM	7	13	4	0	24	16	79	2	0	97	5	19	29	0	53	4	67	1	0	72	246
Total	28	133	6	0	167	74	367	9	2	452	10	75	128	0	213	6	316	2	1	325	1157
Grand Total	66	180	10	1	257	106	819	22	2	949	12	118	215	0	345	10	646	7	1	664	2215
Apprch %	25.7	70	3.9	0.4		11.2	86.3	2.3	0.2		3.5	34.2	62.3	0		1.5	97.3	1.1	0.2		
Total %	3	8.1	0.5	0	11.6	4.8	37	1	0.1	42.8	0.5	5.3	9.7	0	15.6	0.5	29.2	0.3	0	30	
Cars +	66	180	10	1	257	106	784	22	1	913	11	118	211	0	340	10	617	7	1	635	2145
% Cars +	100	100	100	100	100	100	95.7	100	50	96.2	91.7	100	98.1	0	98.6	100	95.5	100	100	95.6	96.8
Trucks	0	0	0	0	0	0	35	0	1	36	1	0	4	0	5	0	29	0	0	29	70
% Trucks	0	0	0	0	0	0	4.3	0	50	3.8	8.3	0	1.9	0	1.4	0	4.5	0	0	4.4	3.2

TRAFFIC DATA COLLECTION

File Name : Simpsonville(06 - Curtis Street and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	Hedge Street Southbound					Curtis Street Westbound					Hedge Street Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 07:00 AM to 08:45 AM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 07:45 AM																					
07:45 AM	**14**	25	**2**	0	41	14	**109**	**5**	0	**128**	2	17	30	0	49	**2**	70	**3**	0	75	293
08:00 AM	6	29	1	0	36	16	100	2	**1**	119	1	21	32	0	54	1	**90**	1	0	**92**	301
08:15 AM	7	**66**	1	0	**74**	**24**	91	3	1	119	0	10	25	0	35	0	87	0	0	87	**315**
08:30 AM	8	25	0	0	33	18	97	2	0	117	**4**	**25**	**42**	0	**71**	1	72	0	**1**	74	295
Total Volume	35	145	4	0	184	72	397	12	2	483	7	73	129	0	209	4	319	4	1	328	1204
% App. Total	19	78.8	2.2	0		14.9	82.2	2.5	0.4		3.3	34.9	61.7	0		1.2	97.3	1.2	0.3		
PHF	.625	.549	.500	.000	.622	.750	.911	.600	.500	.943	.438	.730	.768	.000	.736	.500	.886	.333	.250	.891	.956
Cars +	35	145	4	0	184	72	376	12	1	461	7	73	126	0	206	4	300	4	1	309	1160
% Cars +	100	100	100	0	100	100	94.7	100	50.0	95.4	100	100	97.7	0	98.6	100	94.0	100	100	94.2	96.3
Trucks	0	0	0	0	0	0	21	0	1	22	0	0	3	0	3	0	19	0	0	19	44
% Trucks	0	0	0	0	0	0	5.3	0	50.0	4.6	0	0	2.3	0	1.4	0	6.0	0	0	5.8	3.7

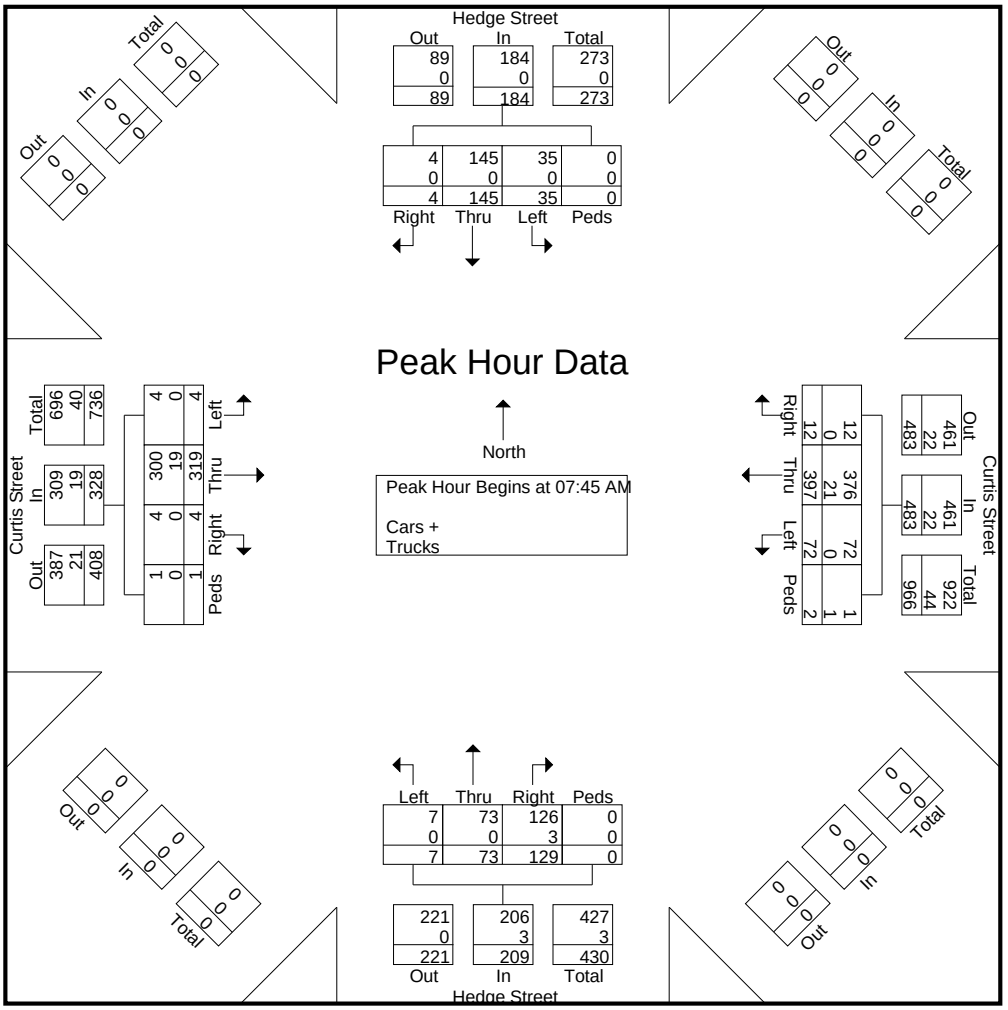

TRAFFIC DATA COLLECTION

File Name : Simpsonville(06 - Curtis Street and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 1


Groups Printed- Cars + - Trucks

	Hedge Street Southbound					Curtis Street Westbound					Hedge Street Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
04:00 PM	23	12	0	0	35	10	65	3	0	78	0	23	44	0	67	2	113	2	0	117	297
04:15 PM	41	16	0	0	57	15	70	2	0	87	2	15	34	0	51	4	122	5	0	131	326
04:30 PM	16	12	2	0	30	14	70	1	0	85	3	10	50	1	64	1	134	2	0	137	316
04:45 PM	22	16	3	0	41	11	55	1	0	67	2	16	45	0	63	4	104	4	0	112	283
Total	102	56	5	0	163	50	260	7	0	317	7	64	173	1	245	11	473	13	0	497	1222
05:00 PM	26	12	1	0	39	21	75	1	0	97	1	13	47	0	61	2	127	4	4	137	334
05:15 PM	32	21	1	2	56	14	66	5	0	85	2	22	60	1	85	4	145	1	2	152	378
05:30 PM	29	13	1	0	43	21	64	1	0	86	0	23	52	0	75	3	143	6	0	152	356
05:45 PM	20	21	3	0	44	19	70	4	0	93	2	20	50	0	72	7	127	0	2	136	345
Total	107	67	6	2	182	75	275	11	0	361	5	78	209	1	293	16	542	11	8	577	1413
Grand Total	209	123	11	2	345	125	535	18	0	678	12	142	382	2	538	27	1015	24	8	1074	2635
Apprch %	60.6	35.7	3.2	0.6		18.4	78.9	2.7	0		2.2	26.4	71	0.4		2.5	94.5	2.2	0.7		
Total %	7.9	4.7	0.4	0.1	13.1	4.7	20.3	0.7	0	25.7	0.5	5.4	14.5	0.1	20.4	1	38.5	0.9	0.3	40.8	
Cars +	209	123	11	2	345	125	521	18	0	664	12	142	379	0	533	27	999	24	8	1058	2600
% Cars +	100	100	100	100	100	100	97.4	100	0	97.9	100	100	99.2	0	99.1	100	98.4	100	100	98.5	98.7
Trucks	0	0	0	0	0	0	14	0	0	14	0	0	3	2	5	0	16	0	0	16	35
% Trucks	0	0	0	0	0	0	2.6	0	0	2.1	0	0	0.8	100	0.9	0	1.6	0	0	1.5	1.3

TRAFFIC DATA COLLECTION


File Name : Simpsonville(06 - Curtis Street and Hedge Street)
Site Code :
Start Date : 9/24/2025
Page No : 2

	Hedge Street Southbound					Curtis Street Westbound					Hedge Street Northbound					Curtis Street Eastbound					
Start Time	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Left	Thru	Right	Peds	App. Total	Int. Total
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 05:00 PM																					
05:00 PM	26	12	1	0	39	**21**	**75**	1	0	**97**	1	13	47	0	61	2	127	4	**4**	137	334
05:15 PM	**32**	**21**	1	**2**	**56**	14	66	**5**	0	85	**2**	22	**60**	**1**	**85**	4	**145**	1	2	**152**	**378**
05:30 PM	29	13	1	0	43	21	64	1	0	86	0	**23**	52	0	75	3	143	**6**	0	152	356
05:45 PM	20	21	**3**	0	44	19	70	4	0	93	2	20	50	0	72	**7**	127	0	2	136	345
Total Volume	107	67	6	2	182	75	275	11	0	361	5	78	209	1	293	16	542	11	8	577	1413
% App. Total	58.8	36.8	3.3	1.1		20.8	76.2	3	0		1.7	26.6	71.3	0.3		2.8	93.9	1.9	1.4		
PHF	.836	.798	.500	.250	.813	.893	.917	.550	.000	.930	.625	.848	.871	.250	.862	.571	.934	.458	.500	.949	.935
Cars +	107	67	6	2	182	75	266	11	0	352	5	78	208	0	291	16	535	11	8	570	1395
% Cars +	100	100	100	100	100	100	96.7	100	0	97.5	100	100	99.5	0	99.3	100	98.7	100	100	98.8	98.7
Trucks	0	0	0	0	0	0	9	0	0	9	0	0	1	1	2	0	7	0	0	7	18
% Trucks	0	0	0	0	0	0	3.3	0	0	2.5	0	0	0.5	100	0.7	0	1.3	0	0	1.2	1.3

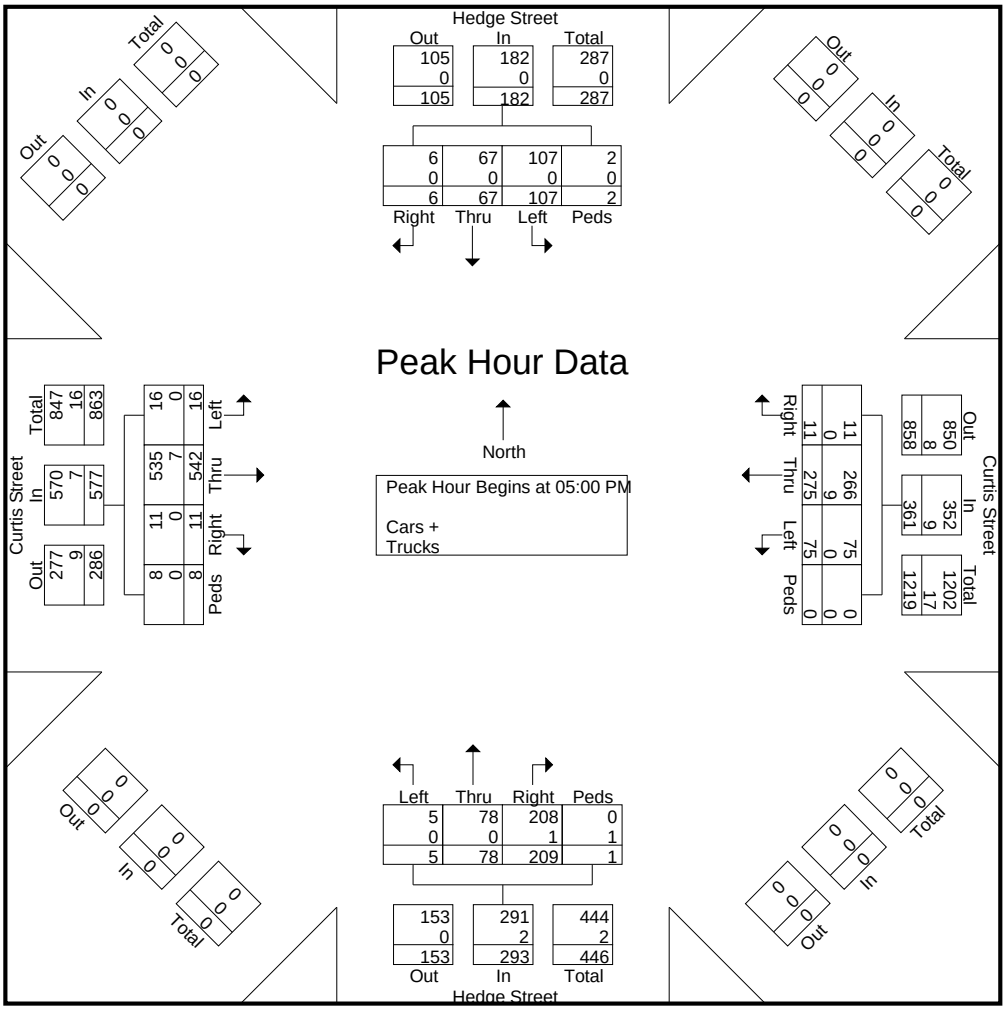

APPENDIX B

TURN LANE ANALYSIS

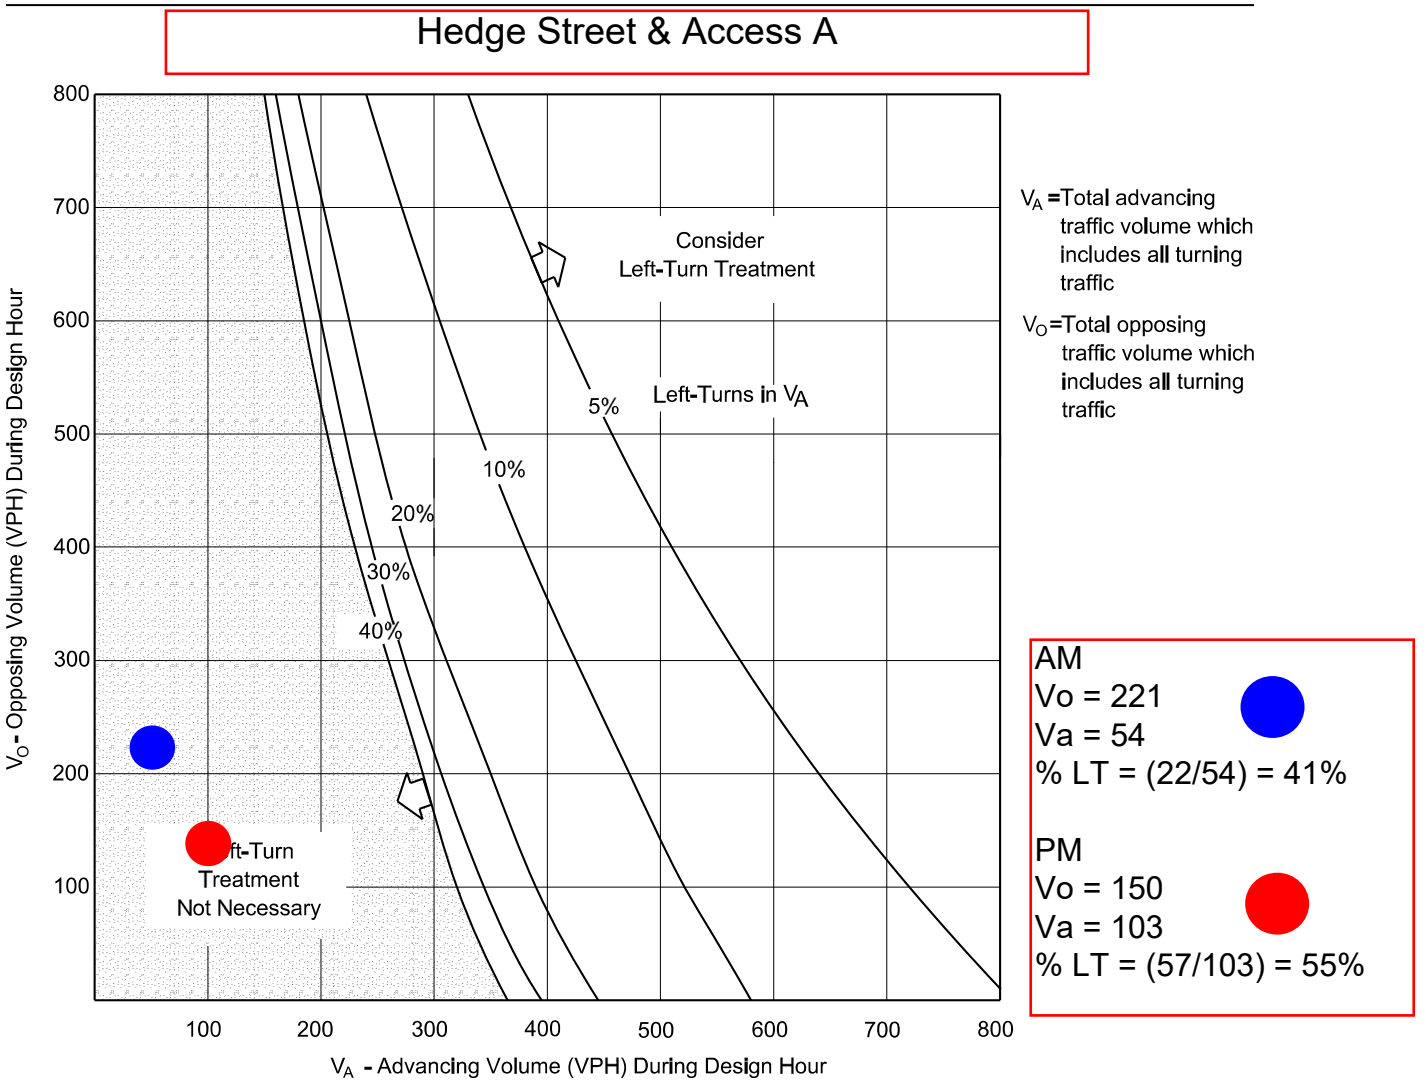


Instructions:

1. *The family of curves represents the percent of left turns in the advancing volume (V_A). The designer should locate the curve for the actual percentage of left turns. When this is not an even increment of 5, the designer should estimate where the curve lies.*

2. *Read V_A and V_O into the chart and locate the intersection of the two volumes.*

3. *Note the location of the point in #2 relative to the line in #1. If the point is to the right of the line, then a left-turn lane is warranted. If the point is to the left of the line, then a left-turn lane is not warranted based on traffic volumes.*

VOLUME GUIDELINES FOR LEFT-TURN LANES AT UNSIGNALIZED INTERSECTIONS ON TWO-LANE HIGHWAYS (40 mph)
Figure 9.5-G

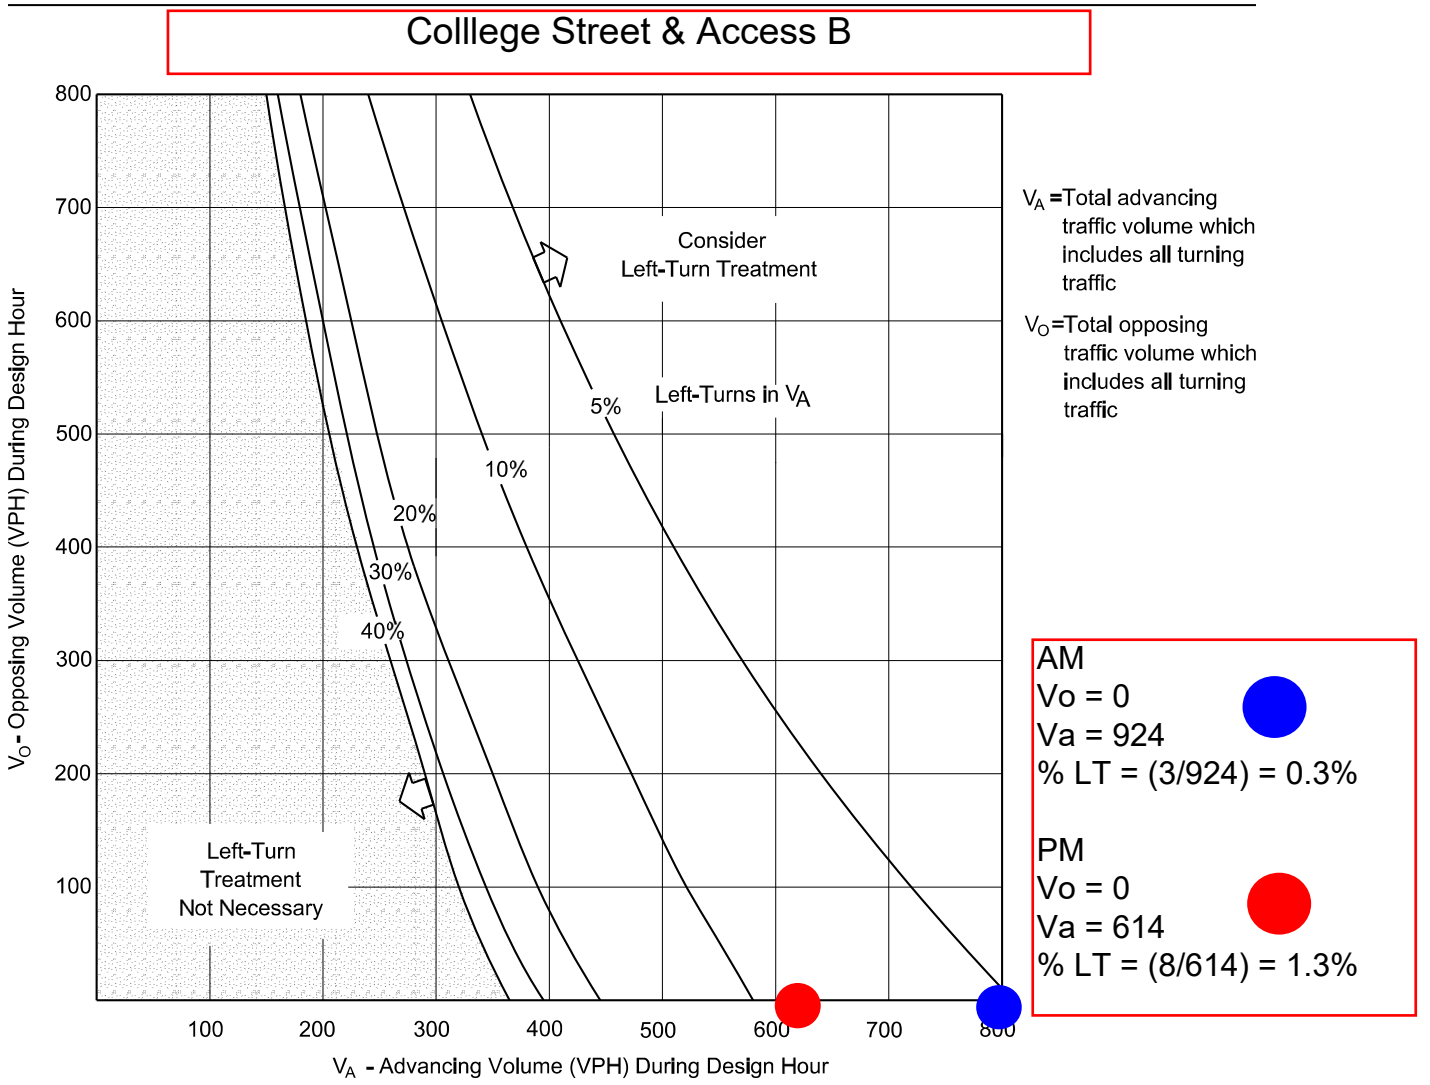

Instructions:


1. *The family of curves represents the percent of left turns in the advancing volume (V_A). The designer should locate the curve for the actual percentage of left turns. When this is not an even increment of 5, the designer should estimate where the curve lies.*

2. *Read V_A and V_O into the chart and locate the intersection of the two volumes.*

3. *Note the location of the point in #2 relative to the line in #1. If the point is to the right of the line, then a left-turn lane is warranted. If the point is to the left of the line, then a left-turn lane is not warranted based on traffic volumes.*

VOLUME GUIDELINES FOR LEFT-TURN LANES AT UNSIGNALIZED INTERSECTIONS ON TWO-LANE HIGHWAYS (40 mph)
Figure 9.5-G

Hedge Street & Access A

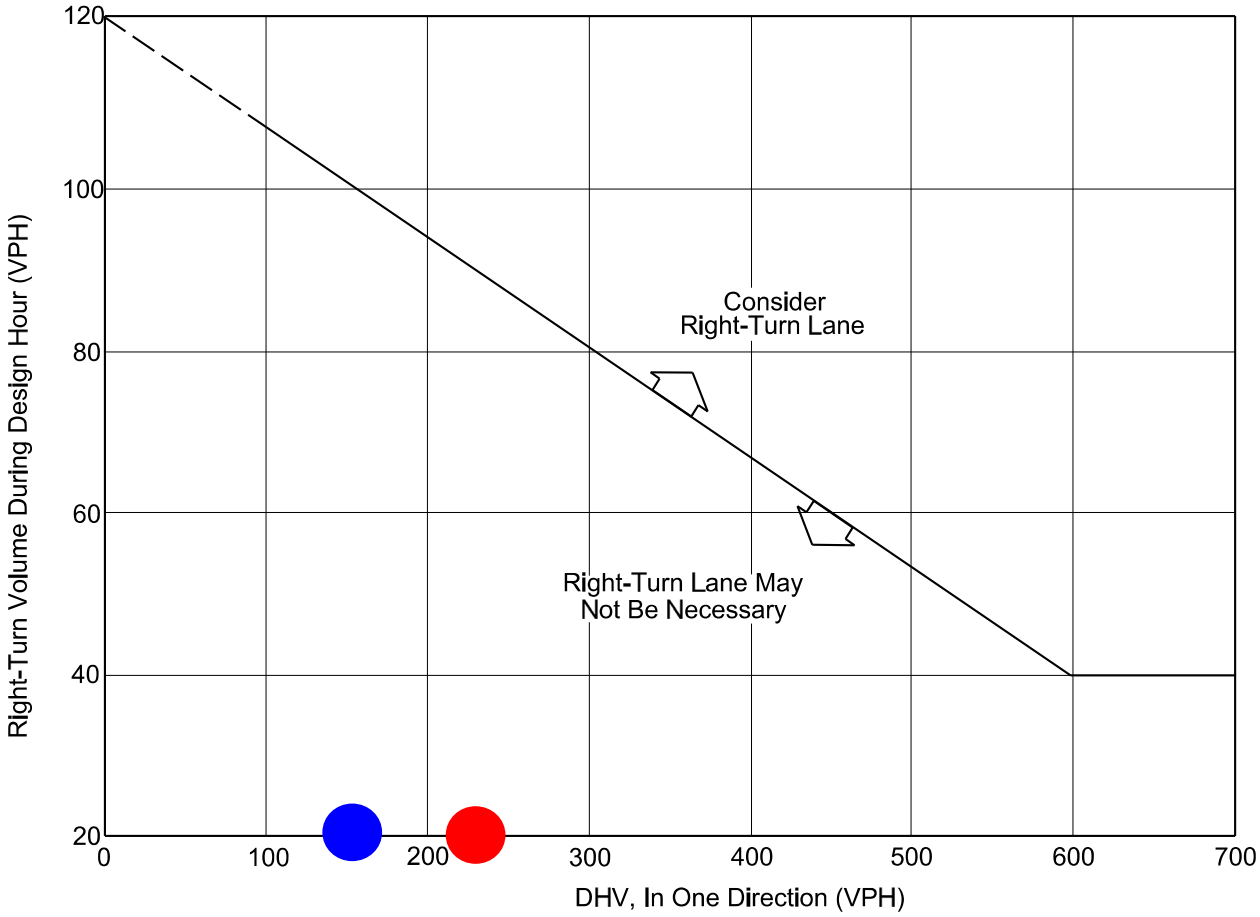

Note: For highways with a design speed below 50 miles per hour with a DHV < 300 and where right turns > 40, an adjustment should be used. To read the vertical axis of the chart, subtract 20 from the actual number of right turns.

AM
DHV = 221
RT = 4

PM
DHV = 150
RT = 12

Example

Given: Design Speed = 35 miles per hour
DHV = 250 vehicles per hour
Right Turns = 100 vehicles per hour


Problem: Determine if a right-turn lane is necessary.

Solution: To read the vertical axis, use 100 – 20 = 80 vehicles per hour. The figure indicates that a right-turn lane is not necessary, unless other factors (e.g., high crash rate) indicate a lane is needed.

GUIDELINES FOR RIGHT-TURN LANES AT UNSIGNALIZED INTERSECTIONS ON TWO-LANE HIGHWAYS
Figure 9.5-A

APPENDIX C

SYNCHRO ANALYSIS REPORTS




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	36	125	12	64	200	196	6	552	16	61	515	19
Future Volume (vph)	36	125	12	64	200	196	6	552	16	61	515	19
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	125		0	125		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.991			0.942			0.996			0.995	
Flt Protected		0.990			0.993		0.950			0.950		
Satd. Flow (prot)	0	1828	0	0	1742	0	1770	1855	0	1770	1853	0
Flt Permitted		0.791			0.929		0.347			0.169		
Satd. Flow (perm)	0	1460	0	0	1630	0	646	1855	0	315	1853	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4			44			2			2	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		82			413			570			1253	
Travel Time (s)		2.2			11.3			11.1			24.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	40	139	13	71	222	218	7	613	18	68	572	21
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	192	0	0	511	0	7	631	0	68	593	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4			8			2			6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0		7.0	7.0		5.0	12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5		22.5	22.5		9.5	22.5		9.5	22.5	
Total Split (s)	43.0	43.0		43.0	43.0		9.6	47.2		9.8	47.4	
Total Split (%)	43.0%	43.0%		43.0%	43.0%		9.6%	47.2%		9.8%	47.4%	
Maximum Green (s)	38.5	38.5		38.5	38.5		5.1	42.7		5.3	42.9	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0		1.0	1.0		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)		0.0			0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)		4.5			4.5		4.5	4.5		4.5	4.5	
Lead/Lag							Lag	Lag		Lead	Lead	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0		7.0	7.0			7.0			7.0	
Flash Don't Walk (s)	11.0	11.0		11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)	0	0		0	0			0			0	
Act Effct Green (s)		33.9			33.9		48.7	48.7		55.2	55.2	
Actuated g/C Ratio		0.34			0.34		0.49	0.49		0.55	0.55	
v/c Ratio		0.39			0.88		0.02	0.70		0.26	0.58	
Control Delay (s/veh)		26.0			45.5		14.0	18.4		15.7	19.7	
Queue Delay		0.0			0.0		0.0	0.1		0.0	0.0	
Total Delay (s/veh)		26.0			45.5		14.0	18.5		15.7	19.7	
LOS		C			D		B	B		B	B	
Approach Delay (s/veh)		26.0			45.5			18.5			19.3	
Approach LOS		C			D			B			B	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 77 (77%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green			
Natural Cycle: 70			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.88			
Intersection Signal Delay (s/veh): 26.4		Intersection LOS: C	
Intersection Capacity Utilization 76.8%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 1: NE Main Street (SC 417) & College Street

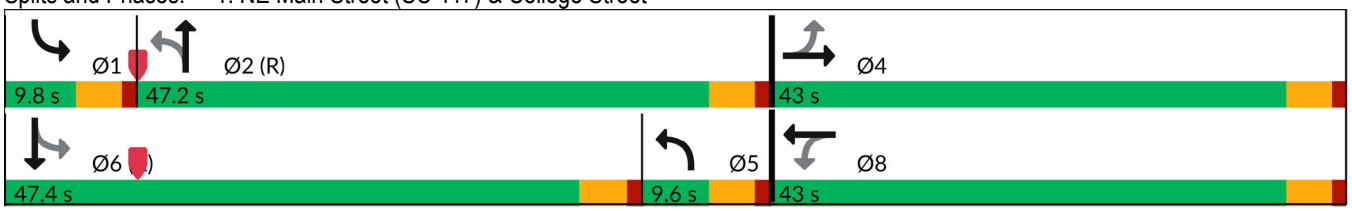


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	25	189	13	51	235	122	22	410	43	118	442	21
Future Volume (vph)	25	189	13	51	235	122	22	410	43	118	442	21
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	150		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.992			0.960			0.986			0.993	
Flt Protected		0.994			0.994		0.950			0.950		
Satd. Flow (prot)	0	1837	0	0	1778	0	1770	1837	0	1770	1850	0
Flt Permitted		0.898			0.918		0.391			0.289		
Satd. Flow (perm)	0	1659	0	0	1642	0	728	1837	0	538	1850	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		3			25			6			3	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		85			379			1084			570	
Travel Time (s)		2.3			10.3			21.1			11.1	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	28	210	14	57	261	136	24	456	48	131	491	23
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	252	0	0	454	0	24	504	0	131	514	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4			8			2			6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0		7.0	7.0		5.0	12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5		22.5	22.5		9.5	22.5		9.5	22.5	
Total Split (s)	42.0	42.0		42.0	42.0		9.6	45.0		13.0	48.4	
Total Split (%)	42.0%	42.0%		42.0%	42.0%		9.6%	45.0%		13.0%	48.4%	
Maximum Green (s)	37.5	37.5		37.5	37.5		5.1	40.5		8.5	43.9	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0		1.0	1.0		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)		0.0			0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)		4.5			4.5		4.5	4.5		4.5	4.5	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0		7.0	7.0			7.0			7.0	
Flash Don't Walk (s)	11.0	11.0		11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)	0	0		0	0			0			0	
Act Effct Green (s)		31.0			31.0		53.0	47.3		59.6	55.9	
Actuated g/C Ratio		0.31			0.31		0.53	0.47		0.60	0.56	
v/c Ratio		0.49			0.86		0.05	0.58		0.31	0.50	
Control Delay (s/veh)		30.0			29.0		10.7	24.0		5.5	7.0	
Queue Delay		0.0			0.6		0.0	0.1		0.0	0.1	
Total Delay (s/veh)		30.0			29.5		10.7	24.1		5.5	7.1	
LOS		C			C		B	C		A	A	
Approach Delay (s/veh)		30.0			29.5			23.5			6.8	
Approach LOS		C			C			C			A	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 80 (80%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green			
Natural Cycle: 60			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.86			
Intersection Signal Delay (s/veh): 20.1		Intersection LOS: C	
Intersection Capacity Utilization 73.2%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 2: NE Main Street (SC 417) & Curtis Street

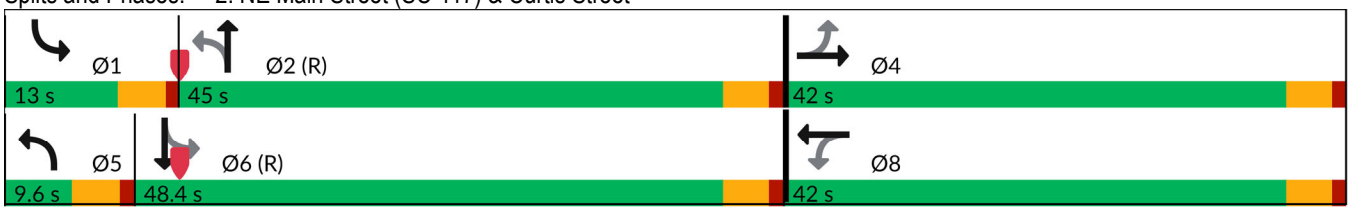



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	153	47	117	442	12	54
Future Volume (vph)	153	47	117	442	12	54
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.968				0.889	
Flt Protected				0.990	0.991	
Satd. Flow (prot)	1803	0	0	1844	1641	0
Flt Permitted				0.990	0.991	
Satd. Flow (perm)	1803	0	0	1844	1641	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	413			1158	568	
Travel Time (s)	11.3			31.6	15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	170	52	130	491	13	60
Shared Lane Traffic (%)						
Lane Group Flow (vph)	222	0	0	621	73	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 54.6%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	2.1

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	153	47	117	442	12	54
Future Vol, veh/h	153	47	117	442	12	54
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	170	52	130	491	13	60

Major/Minor	Major1		Major2		Minor1	
Conflicting Flow All	0	0	222	0	947	196
Stage 1	-	-	-	-	196	-
Stage 2	-	-	-	-	751	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1347	-	290	845
Stage 1	-	-	-	-	837	-
Stage 2	-	-	-	-	466	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1347	-	251	845
Mov Cap-2 Maneuver	-	-	-	-	251	-
Stage 1	-	-	-	-	837	-
Stage 2	-	-	-	-	404	-

Approach	EB	WB	NB
HCM Ctrl Dly, s/v	0	1.7	12
HCM LOS			B


Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT
Capacity (veh/h)	591	-	-	1347	-
HCM Lane V/C Ratio	0.124	-	-	0.097	-
HCM Ctrl Dly (s/v)	12	-	-	8	0
HCM Lane LOS	B	-	-	A	A
HCM 95th %tile Q (veh)	0.4	-	-	0.3	-


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	4	319	4	72	397	12	7	73	129	35	145	4
Future Volume (vph)	4	319	4	72	397	12	7	73	129	35	145	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999			0.997			0.917			0.997	
Flt Protected		0.999			0.993			0.998			0.991	
Satd. Flow (prot)	0	1859	0	0	1844	0	0	1705	0	0	1840	0
Flt Permitted		0.996			0.890			0.998			0.991	
Satd. Flow (perm)	0	1853	0	0	1653	0	0	1705	0	0	1840	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		1			2			72			1	
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		379			1213			1024			568	
Travel Time (s)		10.3			33.1			27.9			15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	4	354	4	80	441	13	8	81	143	39	161	4
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	362	0	0	534	0	0	232	0	0	204	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	0		1	1		1	1	
Detector Template	Left	Thru		Left			Left			Left		
Leading Detector (ft)	20	100		20	0		20	30		20	30	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	30		20	30	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94										
Detector 2 Size(ft)		6										
Detector 2 Type		Cl+Ex										
Detector 2 Channel												
Detector 2 Extend (s)		0.0										
Turn Type	Perm	NA		Perm	NA		Split	NA		Split	NA	
Protected Phases		2			6		4	4		8	8	
Permitted Phases	2			6								
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Split (s)	22.5	22.5		22.5	22.5		22.5	22.5		22.5	22.5	
Total Split (s)	52.2	52.2		52.2	52.2		24.2	24.2		23.6	23.6	
Total Split (%)	52.2%	52.2%		52.2%	52.2%		24.2%	24.2%		23.6%	23.6%	
Maximum Green (s)	47.7	47.7		47.7	47.7		19.7	19.7		19.1	19.1	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0		1.0	1.0		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		4.5			4.5			4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	C-Max	C-Max		Max	Max		None	None		None	None	
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	
Flash Don't Walk (s)	11.0	11.0		11.0	11.0		11.0	11.0		11.0	11.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)		56.3			56.3			14.6			15.6	
Actuated g/C Ratio		0.56			0.56			0.15			0.16	
v/c Ratio		0.35			0.57			0.75			0.71	
Control Delay (s/veh)		8.3			19.0			42.7			50.8	
Queue Delay		0.5			0.1			0.0			0.0	
Total Delay (s/veh)		8.8			19.1			42.7			50.8	
LOS		A			B			D			D	
Approach Delay (s/veh)		8.8			19.1			42.7			50.8	
Approach LOS		A			B			D			D	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 6 (6%), Referenced to phase 2:EBTL, Start of Green			
Natural Cycle: 80			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.75			
Intersection Signal Delay (s/veh): 25.3		Intersection LOS: C	
Intersection Capacity Utilization 78.4%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 4: Hedge Street & Curtis Street

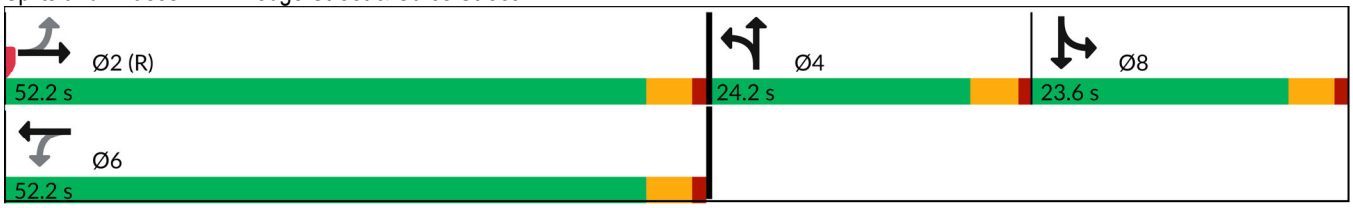



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	5	165	1	4	212	9	0	0	7	1	0	21
Future Volume (vph)	5	165	1	4	212	9	0	0	7	1	0	21
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999			0.995			0.865			0.871	
Flt Protected		0.998			0.999						0.998	
Satd. Flow (prot)	0	1857	0	0	1852	0	0	1611	0	0	1619	0
Flt Permitted		0.998			0.999						0.998	
Satd. Flow (perm)	0	1857	0	0	1852	0	0	1611	0	0	1619	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1082			82			565			1260	
Travel Time (s)		29.5			2.2			15.4			34.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	6	183	1	4	236	10	0	0	8	1	0	23
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	190	0	0	250	0	0	8	0	0	24	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 23.4%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	0.8

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	5	165	1	4	212	9	0	0	7	1	0	21
Future Vol, veh/h	5	165	1	4	212	9	0	0	7	1	0	21
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	6	183	1	4	236	10	0	0	8	1	0	23

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	246	0	0	184	0	0	457	450	184	449	445	241
Stage 1	-	-	-	-	-	-	196	196	-	249	249	-
Stage 2	-	-	-	-	-	-	261	254	-	200	196	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1320	-	-	1391	-	-	514	504	858	520	508	798
Stage 1	-	-	-	-	-	-	806	739	-	755	701	-
Stage 2	-	-	-	-	-	-	744	697	-	802	739	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1320	-	-	1391	-	-	496	500	858	512	504	798
Mov Cap-2 Maneuver	-	-	-	-	-	-	496	500	-	512	504	-
Stage 1	-	-	-	-	-	-	802	735	-	751	699	-
Stage 2	-	-	-	-	-	-	720	695	-	791	735	-

Approach	EB	WB	NB	SB
HCM Ctrl Dly, s/v	0.2	0.1	9.2	9.8
HCM LOS			A	A

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	858	1320	-	-	1391	-	-	778
HCM Lane V/C Ratio	0.009	0.004	-	-	0.003	-	-	0.031
HCM Ctrl Dly (s/v)	9.2	7.7	0	-	7.6	0	-	9.8
HCM Lane LOS	A	A	A	-	A	A	-	A
HCM 95th %tile Q (veh)	0	0	-	-	0	-	-	0.1



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	1	214	11	13	257	8	14	0	12	1	0	16
Future Volume (vph)	1	214	11	13	257	8	14	0	12	1	0	16
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.994			0.996			0.939			0.872	
Flt Protected					0.998			0.973			0.997	
Satd. Flow (prot)	0	1852	0	0	1852	0	0	1702	0	0	1619	0
Flt Permitted					0.998			0.973			0.997	
Satd. Flow (perm)	0	1852	0	0	1852	0	0	1702	0	0	1619	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1197			85			1027			565	
Travel Time (s)		32.6			2.3			28.0			15.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	1	238	12	14	286	9	16	0	13	1	0	18
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	251	0	0	309	0	0	29	0	0	19	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 37.0%		ICU Level of Service A	
Analysis Period (min) 15			


Intersection	
Int Delay, s/veh	1.1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	1	214	11	13	257	8	14	0	12	1	0	16
Future Vol, veh/h	1	214	11	13	257	8	14	0	12	1	0	16
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	1	238	12	14	286	9	16	0	13	1	0	18

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	295	0	0	250	0	0	574	569	244	572	571	291
Stage 1	-	-	-	-	-	-	246	246	-	319	319	-
Stage 2	-	-	-	-	-	-	328	323	-	253	252	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1266	-	-	1316	-	-	430	432	795	431	431	748
Stage 1	-	-	-	-	-	-	758	703	-	693	653	-
Stage 2	-	-	-	-	-	-	685	650	-	751	698	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1266	-	-	1316	-	-	415	426	795	419	425	748
Mov Cap-2 Maneuver	-	-	-	-	-	-	415	426	-	419	425	-
Stage 1	-	-	-	-	-	-	757	702	-	692	645	-
Stage 2	-	-	-	-	-	-	660	642	-	738	697	-

Approach	EB	WB	NB	SB
HCM Ctrl Dly, s/v	0	0.4	12.2	10.2
HCM LOS			B	B

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	532	1266	-	-	1316	-	-	715
HCM Lane V/C Ratio	0.054	0.001	-	-	0.011	-	-	0.026
HCM Ctrl Dly (s/v)	12.2	7.8	0	-	7.8	0	-	10.2
HCM Lane LOS	B	A	A	-	A	A	-	B
HCM 95th %tile Q (veh)	0.2	0	-	-	0	-	-	0.1




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	33	177	27	42	160	103	12	498	72	123	663	22
Future Volume (vph)	33	177	27	42	160	103	12	498	72	123	663	22
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	125		0	125		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.985			0.955			0.981			0.995	
Flt Protected		0.993			0.993		0.950			0.950		
Satd. Flow (prot)	0	1822	0	0	1766	0	1770	1827	0	1770	1853	0
Flt Permitted		0.832			0.867		0.262			0.249		
Satd. Flow (perm)	0	1527	0	0	1542	0	488	1827	0	464	1853	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		6			26			10			2	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		82			413			570			1253	
Travel Time (s)		2.2			11.3			11.1			24.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	37	197	30	47	178	114	13	553	80	137	737	24
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	264	0	0	339	0	13	633	0	137	761	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4			8			2			6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0		7.0	7.0		5.0	12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5		22.5	22.5		9.5	22.5		9.5	22.5	
Total Split (s)	33.0	33.0		33.0	33.0		9.6	53.8		13.2	57.4	
Total Split (%)	33.0%	33.0%		33.0%	33.0%		9.6%	53.8%		13.2%	57.4%	
Maximum Green (s)	28.5	28.5		28.5	28.5		5.1	49.3		8.7	52.9	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0		1.0	1.0		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)		0.0			0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)		4.5			4.5		4.5	4.5		4.5	4.5	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0		7.0	7.0			7.0			7.0	
Flash Don't Walk (s)	11.0	11.0		11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)	0	0		0	0			0			0	
Act Effct Green (s)		23.8			23.8		60.2	54.8		67.0	65.3	
Actuated g/C Ratio		0.24			0.24		0.60	0.55		0.67	0.65	
v/c Ratio		0.72			0.88		0.04	0.63		0.33	0.63	
Control Delay (s/veh)		45.0			56.8		4.3	9.7		8.9	15.1	
Queue Delay		0.0			0.0		0.0	0.2		0.0	0.0	
Total Delay (s/veh)		45.0			56.8		4.3	9.9		8.9	15.1	
LOS		D			E		A	A		A	B	
Approach Delay (s/veh)		45.0			56.8			9.8			14.2	
Approach LOS		D			E			A			B	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 72 (72%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green			
Natural Cycle: 70			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.88			
Intersection Signal Delay (s/veh): 23.4		Intersection LOS: C	
Intersection Capacity Utilization 74.3%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 1: NE Main Street (SC 417) & College Street

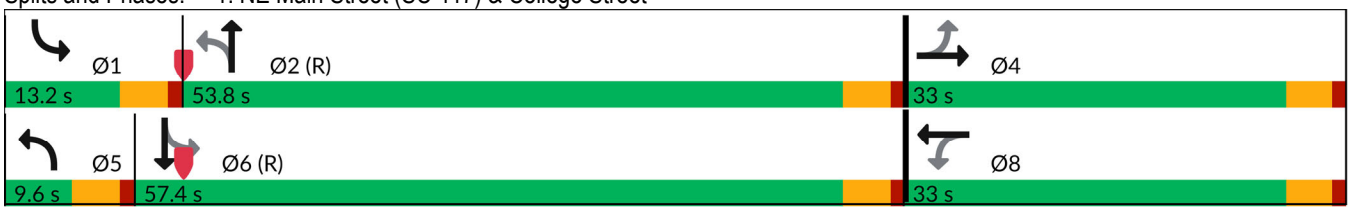


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	16	252	21	30	190	54	44	456	136	191	465	51
Future Volume (vph)	16	252	21	30	190	54	44	456	136	191	465	51
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	150		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990			0.973			0.966			0.985	
Flt Protected		0.997			0.995		0.950			0.950		
Satd. Flow (prot)	0	1839	0	0	1803	0	1770	1799	0	1770	1835	0
Flt Permitted		0.955			0.841		0.375			0.232		
Satd. Flow (perm)	0	1761	0	0	1524	0	699	1799	0	432	1835	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4			12			21			9	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		85			379			1084			570	
Travel Time (s)		2.3			10.3			21.1			11.1	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	18	280	23	33	211	60	49	507	151	212	517	57
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	321	0	0	304	0	49	658	0	212	574	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4			8			2			6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4		8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0		7.0	7.0		5.0	12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5		22.5	22.5		9.5	22.5		9.5	22.5	
Total Split (s)	30.0	30.0		30.0	30.0		9.6	53.0		17.0	60.4	
Total Split (%)	30.0%	30.0%		30.0%	30.0%		9.6%	53.0%		17.0%	60.4%	
Maximum Green (s)	25.5	25.5		25.5	25.5		5.1	48.5		12.5	55.9	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0		1.0	1.0		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)		0.0			0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)		4.5			4.5		4.5	4.5		4.5	4.5	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		None	C-Max		None	C-Max	
Walk Time (s)	7.0	7.0		7.0	7.0			7.0			7.0	
Flash Don't Walk (s)	11.0	11.0		11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)	0	0		0	0			0			0	
Act Effct Green (s)		22.0			22.0		60.3	54.7		68.4	60.9	
Actuated g/C Ratio		0.22			0.22		0.60	0.55		0.68	0.61	
v/c Ratio		0.82			0.88		0.10	0.66		0.50	0.51	
Control Delay (s/veh)		54.0			46.7		6.9	21.1		12.0	9.8	
Queue Delay		0.0			0.1		0.0	0.3		0.1	0.2	
Total Delay (s/veh)		54.0			46.8		6.9	21.4		12.1	10.0	
LOS		D			D		A	C		B	B	
Approach Delay (s/veh)		54.0			46.8			20.4			10.6	
Approach LOS		D			D			C			B	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 66 (66%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green			
Natural Cycle: 65			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.88			
Intersection Signal Delay (s/veh): 25.6		Intersection LOS: C	
Intersection Capacity Utilization 77.8%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 2: NE Main Street (SC 417) & Curtis Street

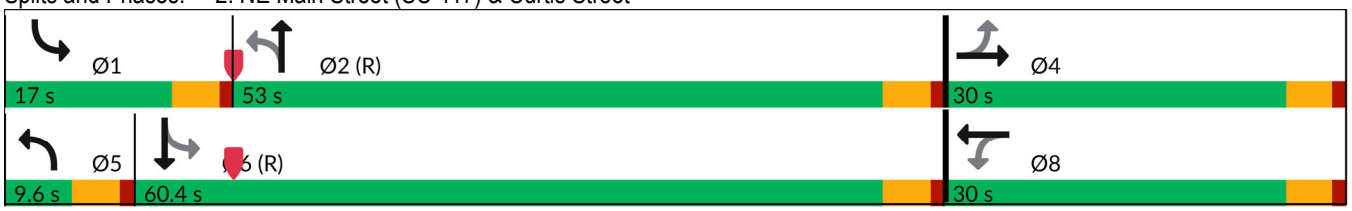



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	331	133	44	268	9	56
Future Volume (vph)	331	133	44	268	9	56
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.961				0.884	
Flt Protected				0.993	0.993	
Satd. Flow (prot)	1790	0	0	1850	1635	0
Flt Permitted				0.993	0.993	
Satd. Flow (perm)	1790	0	0	1850	1635	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	413			1158	568	
Travel Time (s)	11.3			31.6	15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	368	148	49	298	10	62
Shared Lane Traffic (%)						
Lane Group Flow (vph)	516	0	0	347	72	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 56.0%		ICU Level of Service B	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	1.4

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	331	133	44	268	9	56
Future Vol, veh/h	331	133	44	268	9	56
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	368	148	49	298	10	62

Major/Minor	Major1		Major2		Minor1	
Conflicting Flow All	0	0	516	0	838	442
Stage 1	-	-	-	-	442	-
Stage 2	-	-	-	-	396	-
Critical Hdwy	-	-	4.12	-	6.42	6.22
Critical Hdwy Stg 1	-	-	-	-	5.42	-
Critical Hdwy Stg 2	-	-	-	-	5.42	-
Follow-up Hdwy	-	-	2.218	-	3.518	3.318
Pot Cap-1 Maneuver	-	-	1050	-	336	615
Stage 1	-	-	-	-	648	-
Stage 2	-	-	-	-	680	-
Platoon blocked, %	-	-		-		
Mov Cap-1 Maneuver	-	-	1050	-	317	615
Mov Cap-2 Maneuver	-	-	-	-	317	-
Stage 1	-	-	-	-	648	-
Stage 2	-	-	-	-	642	-

Approach	EB	WB	NB
HCM Ctrl Dly, s/v	0	1.2	12.6
HCM LOS			B

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT
Capacity (veh/h)	544	-	-	1050	-
HCM Lane V/C Ratio	0.133	-	-	0.047	-
HCM Ctrl Dly (s/v)	12.6	-	-	8.6	0
HCM Lane LOS	B	-	-	A	A
HCM 95th %tile Q (veh)	0.5	-	-	0.1	-

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	16	542	11	75	275	11	5	78	209	107	67	6
Future Volume (vph)	16	542	11	75	275	11	5	78	209	107	67	6
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.997			0.996			0.904			0.995	
Flt Protected		0.999			0.990			0.999			0.971	
Satd. Flow (prot)	0	1855	0	0	1837	0	0	1682	0	0	1800	0
Flt Permitted		0.985			0.778			0.999			0.971	
Satd. Flow (perm)	0	1829	0	0	1443	0	0	1682	0	0	1800	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		1			2			114			2	
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		379			1213			1024			568	
Travel Time (s)		10.3			33.1			27.9			15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	18	602	12	83	306	12	6	87	232	119	74	7
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	632	0	0	401	0	0	325	0	0	200	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	0		1	1		1	1	
Detector Template	Left	Thru		Left			Left			Left		
Leading Detector (ft)	20	100		20	0		20	30		20	30	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	30		20	30	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94										
Detector 2 Size(ft)		6										
Detector 2 Type		Cl+Ex										
Detector 2 Channel												
Detector 2 Extend (s)		0.0										
Turn Type	Perm	NA		Perm	NA		Split	NA		Split	NA	
Protected Phases		2			6		4	4		8	8	
Permitted Phases	2			6								
Detector Phase	2	2		6	6		4	4		8	8	
Switch Phase												
Minimum Initial (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Split (s)	22.5	22.5		22.5	22.5		22.5	22.5		22.5	22.5	
Total Split (s)	51.0	51.0		51.0	51.0		26.0	26.0		23.0	23.0	
Total Split (%)	51.0%	51.0%		51.0%	51.0%		26.0%	26.0%		23.0%	23.0%	
Maximum Green (s)	46.5	46.5		46.5	46.5		21.5	21.5		18.5	18.5	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0		1.0	1.0		1.0	1.0		1.0	1.0	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		4.5			4.5			4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	C-Max	C-Max		Max	Max		None	None		None	None	
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	
Flash Don't Walk (s)	11.0	11.0		11.0	11.0		11.0	11.0		11.0	11.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)		53.6			53.6			17.4			15.4	
Actuated g/C Ratio		0.54			0.54			0.17			0.15	
v/c Ratio		0.64			0.52			0.84			0.72	
Control Delay (s/veh)		16.0			19.8			44.6			51.3	
Queue Delay		1.2			0.0			0.0			0.0	
Total Delay (s/veh)		17.2			19.8			44.6			51.3	
LOS		B			B			D			D	
Approach Delay (s/veh)		17.2			19.8			44.6			51.3	
Approach LOS		B			B			D			D	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 8 (8%), Referenced to phase 2:EBTL, Start of Green			
Natural Cycle: 80			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.84			
Intersection Signal Delay (s/veh): 27.9		Intersection LOS: C	
Intersection Capacity Utilization 91.4%		ICU Level of Service F	
Analysis Period (min) 15			

Splits and Phases: 4: Hedge Street & Curtis Street



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	3	217	2	15	175	4	4	0	6	14	0	28
Future Volume (vph)	3	217	2	15	175	4	4	0	6	14	0	28
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999			0.997			0.914			0.911	
Flt Protected		0.999			0.996			0.982			0.983	
Satd. Flow (prot)	0	1859	0	0	1850	0	0	1672	0	0	1668	0
Flt Permitted		0.999			0.996			0.982			0.983	
Satd. Flow (perm)	0	1859	0	0	1850	0	0	1672	0	0	1668	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1082			82			565			1260	
Travel Time (s)		29.5			2.2			15.4			34.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	3	241	2	17	194	4	4	0	7	16	0	31
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	246	0	0	215	0	0	11	0	0	47	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 28.5%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	1.5

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	3	217	2	15	175	4	4	0	6	14	0	28
Future Vol, veh/h	3	217	2	15	175	4	4	0	6	14	0	28
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	3	241	2	17	194	4	4	0	7	16	0	31

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	198	0	0	243	0	0	494	480	242	482	479	196
Stage 1	-	-	-	-	-	-	248	248	-	230	230	-
Stage 2	-	-	-	-	-	-	246	232	-	252	249	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1375	-	-	1323	-	-	486	485	797	495	486	845
Stage 1	-	-	-	-	-	-	756	701	-	773	714	-
Stage 2	-	-	-	-	-	-	758	713	-	752	701	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1375	-	-	1323	-	-	462	477	797	485	478	845
Mov Cap-2 Maneuver	-	-	-	-	-	-	462	477	-	485	478	-
Stage 1	-	-	-	-	-	-	754	699	-	771	704	-
Stage 2	-	-	-	-	-	-	720	703	-	743	699	-

Approach	EB	WB	NB	SB
HCM Ctrl Dly, s/v	0.1	0.6	10.9	10.7
HCM LOS			B	B

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	618	1375	-	-	1323	-	-	677
HCM Lane V/C Ratio	0.018	0.002	-	-	0.013	-	-	0.069
HCM Ctrl Dly (s/v)	10.9	7.6	0	-	7.8	0	-	10.7
HCM Lane LOS	B	A	A	-	A	A	-	B
HCM 95th %tile Q (veh)	0.1	0	-	-	0	-	-	0.2



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	4	255	2	31	244	10	9	0	23	11	0	29
Future Volume (vph)	4	255	2	31	244	10	9	0	23	11	0	29
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999			0.995			0.902			0.902	
Flt Protected		0.999			0.995			0.986			0.987	
Satd. Flow (prot)	0	1859	0	0	1844	0	0	1657	0	0	1658	0
Flt Permitted		0.999			0.995			0.986			0.987	
Satd. Flow (perm)	0	1859	0	0	1844	0	0	1657	0	0	1658	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1197			85			1027			565	
Travel Time (s)		32.6			2.3			28.0			15.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	4	283	2	34	271	11	10	0	26	12	0	32
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	289	0	0	316	0	0	36	0	0	44	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 41.9%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	1.8

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Vol, veh/h	4	255	2	31	244	10	9	0	23	11	0	29
Future Vol, veh/h	4	255	2	31	244	10	9	0	23	11	0	29
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	4	283	2	34	271	11	10	0	26	12	0	32

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	282	0	0	285	0	0	653	642	284	650	638	277
Stage 1	-	-	-	-	-	-	292	292	-	345	345	-
Stage 2	-	-	-	-	-	-	361	350	-	305	293	-
Critical Hdwy	4.12	-	-	4.12	-	-	7.12	6.52	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-	6.12	5.52	-
Follow-up Hdwy	2.218	-	-	2.218	-	-	3.518	4.018	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	1280	-	-	1277	-	-	380	392	755	382	394	762
Stage 1	-	-	-	-	-	-	716	671	-	671	636	-
Stage 2	-	-	-	-	-	-	657	633	-	705	670	-
Platoon blocked, %		-	-		-	-						
Mov Cap-1 Maneuver	1280	-	-	1277	-	-	354	378	755	359	380	762
Mov Cap-2 Maneuver	-	-	-	-	-	-	354	378	-	359	380	-
Stage 1	-	-	-	-	-	-	713	668	-	668	616	-
Stage 2	-	-	-	-	-	-	609	613	-	678	667	-

Approach	EB	WB	NB	SB
HCM Ctrl Dly, s/v	0.1	0.9	11.7	11.7
HCM LOS			B	B


Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	573	1280	-	-	1277	-	-	582
HCM Lane V/C Ratio	0.062	0.003	-	-	0.027	-	-	0.076
HCM Ctrl Dly (s/v)	11.7	7.8	0	-	7.9	0	-	11.7
HCM Lane LOS	B	A	A	-	A	A	-	B
HCM 95th %tile Q (veh)	0.2	0	-	-	0.1	-	-	0.2

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	122	462	337	30	495	0	0	611	42
Future Volume (vph)	0	0	0	122	462	337	30	495	0	0	611	42
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	125		0
Storage Lanes	0		0	0		0	1		0	0		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.945						0.991	
Flt Protected					0.993		0.950					
Satd. Flow (prot)	0	0	0	0	3321	0	1770	1863	0	0	1846	0
Flt Permitted					0.993		0.188					
Satd. Flow (perm)	0	0	0	0	3321	0	350	1863	0	0	1846	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					123						5	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		82			413			570			1253	
Travel Time (s)		2.2			11.3			11.1			24.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	136	513	374	33	550	0	0	679	47
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	1023	0	33	550	0	0	726	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors				1	2		1	2			2	
Detector Template				Left	Thru		Left	Thru			Thru	
Leading Detector (ft)				20	100		20	100			100	
Trailing Detector (ft)				0	0		0	0			0	
Detector 1 Position(ft)				0	0		0	0			0	
Detector 1 Size(ft)				20	6		20	6			6	
Detector 1 Type				Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Queue (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Delay (s)				0.0	0.0		0.0	0.0			0.0	
Detector 2 Position(ft)					94			94			94	
Detector 2 Size(ft)					6			6			6	
Detector 2 Type					Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0			0.0	
Turn Type				Perm	NA		pm+pt	NA			NA	
Protected Phases					8		5	2			6	
Permitted Phases				8			2					

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase				8	8		5	2			6	
Switch Phase												
Minimum Initial (s)				7.0	7.0		5.0	12.0			12.0	
Minimum Split (s)				22.5	22.5		9.5	22.5			22.5	
Total Split (s)				38.0	38.0		9.6	62.0			52.4	
Total Split (%)				38.0%	38.0%		9.6%	62.0%			52.4%	
Maximum Green (s)				33.5	33.5		5.1	57.5			47.9	
Yellow Time (s)				3.5	3.5		3.5	3.5			3.5	
All-Red Time (s)				1.0	1.0		1.0	1.0			1.0	
Lost Time Adjust (s)					0.0		0.0	0.0			0.0	
Total Lost Time (s)					4.5		4.5	4.5			4.5	
Lead/Lag							Lag				Lead	
Lead-Lag Optimize?							Yes				Yes	
Vehicle Extension (s)				3.0	3.0		3.0	3.0			3.0	
Recall Mode				None	None		None	C-Max			C-Max	
Walk Time (s)				7.0	7.0			7.0			7.0	
Flash Don't Walk (s)				11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)				0	0			0			0	
Act Effct Green (s)					32.5		58.5	58.5			52.8	
Actuated g/C Ratio					0.33		0.59	0.59			0.53	
v/c Ratio					0.88		0.12	0.50			0.74	
Control Delay (s/veh)					38.0		3.0	4.0			25.8	
Queue Delay					0.0		0.0	0.1			0.0	
Total Delay (s/veh)					38.0		3.0	4.1			25.8	
LOS					D		A	A			C	
Approach Delay (s/veh)					38.0			4.0			25.8	
Approach LOS					D			A			C	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 14 (14%), Referenced to phase 2:NBTL and 6:SBT, Start of Green			
Natural Cycle: 80			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.88			
Intersection Signal Delay (s/veh): 25.7		Intersection LOS: C	
Intersection Capacity Utilization 77.2%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 1: NE Main Street (SC 417) & College Street

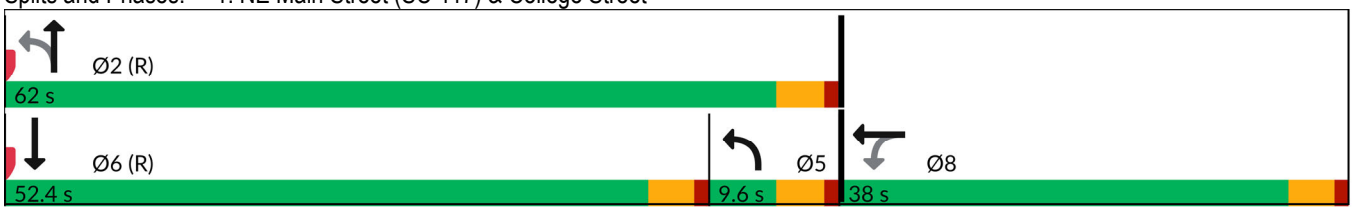


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	65	333	27	0	0	0	0	441	63	190	533	0
Future Volume (vph)	65	333	27	0	0	0	0	441	63	190	533	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	225		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990						0.983				
Flt Protected		0.992								0.950		
Satd. Flow (prot)	0	3476	0	0	0	0	0	1831	0	1770	1863	0
Flt Permitted		0.992								0.329		
Satd. Flow (perm)	0	3476	0	0	0	0	0	1831	0	613	1863	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		6						10				
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		85			379			1084			570	
Travel Time (s)		2.3			10.3			21.1			11.1	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	72	370	30	0	0	0	0	490	70	211	592	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	472	0	0	0	0	0	560	0	211	592	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	
Turn Type	Perm	NA						NA		pm+pt	NA	
Protected Phases		4						2		1	6	
Permitted Phases	4									6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4						2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0						12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5						22.5		9.5	22.5	
Total Split (s)	27.0	27.0						55.0		18.0	73.0	
Total Split (%)	27.0%	27.0%						55.0%		18.0%	73.0%	
Maximum Green (s)	22.5	22.5						50.5		13.5	68.5	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0		0.0	0.0	
Total Lost Time (s)		4.5						4.5		4.5	4.5	
Lead/Lag								Lead		Lag		
Lead-Lag Optimize?								Yes		Yes		
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	None	None						C-Max		None	C-Max	
Walk Time (s)	7.0	7.0						7.0			7.0	
Flash Don't Walk (s)	11.0	11.0						11.0			11.0	
Pedestrian Calls (#/hr)	0	0						0			0	
Act Effct Green (s)		18.8						54.2		72.2	72.2	
Actuated g/C Ratio		0.19						0.54		0.72	0.72	
v/c Ratio		0.72						0.56		0.35	0.44	
Control Delay (s/veh)		43.9						18.2		2.6	2.2	
Queue Delay		0.0						0.0		0.0	0.3	
Total Delay (s/veh)		43.9						18.2		2.6	2.5	
LOS		D						B		A	A	
Approach Delay (s/veh)		43.9						18.2			2.5	
Approach LOS		D						B			A	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 9 (9%), Referenced to phase 2:NBT and 6:SBTL, Start of Green			
Natural Cycle: 60			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.72			
Intersection Signal Delay (s/veh): 18.0		Intersection LOS: B	
Intersection Capacity Utilization 77.2%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 2: NE Main Street (SC 417) & Curtis Street

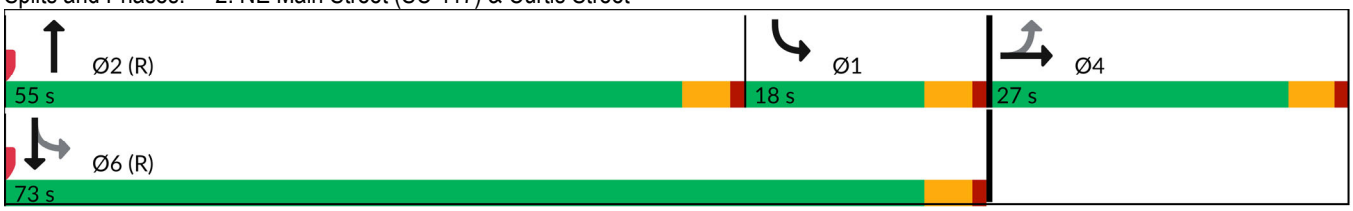



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	0	0	213	890	24	0
Future Volume (vph)	0	0	213	890	24	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	0.95	0.95	1.00	1.00
Frt						
Flt Protected				0.990	0.950	
Satd. Flow (prot)	0	0	0	3504	1770	0
Flt Permitted				0.990	0.950	
Satd. Flow (perm)	0	0	0	3504	1770	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	413			1158	568	
Travel Time (s)	11.3			31.6	15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	237	989	27	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	1226	27	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 40.8%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	0.4

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	0	0	213	890	24	0
Future Vol, veh/h	0	0	213	890	24	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	237	989	27	0

Major/Minor	Major2		Minor1	
Conflicting Flow All	0	0	969	-
Stage 1	-	-	0	-
Stage 2	-	-	969	-
Critical Hdwy	4.14	-	6.84	-
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	5.84	-
Follow-up Hdwy	2.22	-	3.52	-
Pot Cap-1 Maneuver	-	-	251	0
Stage 1	-	-	-	0
Stage 2	-	-	329	0
Platoon blocked, %		-		
Mov Cap-1 Maneuver	-	-	251	-
Mov Cap-2 Maneuver	-	-	251	-
Stage 1	-	-	-	-
Stage 2	-	-	329	-

Approach	WB	NB
HCM Ctrl Dly, s/v		21
HCM LOS		C


Minor Lane/Major Mvmt	NBLn1	WBL	WBT
Capacity (veh/h)	251	-	-
HCM Lane V/C Ratio	0.106	-	-
HCM Ctrl Dly (s/v)	21	-	-
HCM Lane LOS	C	-	-
HCM 95th %tile Q (veh)	0.4	-	-


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	4	501	54	0	0	0	0	28	194	37	180	0
Future Volume (vph)	4	501	54	0	0	0	0	28	194	37	180	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.986						0.882				
Flt Protected											0.992	
Satd. Flow (prot)	0	3490	0	0	0	0	0	1643	0	0	1848	0
Flt Permitted											0.992	
Satd. Flow (perm)	0	3490	0	0	0	0	0	1643	0	0	1848	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		12						216				
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		379			1213			1024			568	
Travel Time (s)		10.3			33.1			27.9			15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	4	557	60	0	0	0	0	31	216	41	200	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	621	0	0	0	0	0	247	0	0	241	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						1		1	1	
Detector Template	Left	Thru								Left		
Leading Detector (ft)	20	100						30		20	30	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						30		20	30	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94										
Detector 2 Size(ft)		6										
Detector 2 Type		Cl+Ex										
Detector 2 Channel												
Detector 2 Extend (s)		0.0										
Turn Type	Perm	NA						NA		Split	NA	
Protected Phases		2						4		8	8	
Permitted Phases	2											
Detector Phase	2	2						4		8	8	
Switch Phase												
Minimum Initial (s)	7.0	7.0						7.0		7.0	7.0	

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Split (s)	22.5	22.5						22.5		22.5	22.5	
Total Split (s)	38.0	38.0						29.0		33.0	33.0	
Total Split (%)	38.0%	38.0%						29.0%		33.0%	33.0%	
Maximum Green (s)	33.5	33.5						24.5		28.5	28.5	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0			0.0	
Total Lost Time (s)		4.5						4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	C-Max	C-Max						None		None	None	
Walk Time (s)	7.0	7.0						7.0		7.0	7.0	
Flash Don't Walk (s)	11.0	11.0						11.0		11.0	11.0	
Pedestrian Calls (#/hr)	0	0						0		0	0	
Act Effct Green (s)		58.5						9.7			18.3	
Actuated g/C Ratio		0.59						0.10			0.18	
v/c Ratio		0.30						0.70			0.71	
Control Delay (s/veh)		6.7						19.6			49.8	
Queue Delay		0.2						0.0			0.0	
Total Delay (s/veh)		6.9						19.6			49.8	
LOS		A						B			D	
Approach Delay (s/veh)		6.9						19.6			49.8	
Approach LOS		A						B			D	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 76 (76%), Referenced to phase 2:EBTL, Start of Green			
Natural Cycle: 70			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.71			
Intersection Signal Delay (s/veh): 19.0		Intersection LOS: B	
Intersection Capacity Utilization 51.9%		ICU Level of Service A	
Analysis Period (min) 15			

Splits and Phases: 4: Hedge Street & Curtis Street





Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	27	498	10	32	5	0	0	1	22
Future Volume (vph)	0	0	0	27	498	10	32	5	0	0	1	22
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.997						0.870	
Flt Protected					0.997			0.959				
Satd. Flow (prot)	0	0	0	0	3518	0	0	1786	0	0	1621	0
Flt Permitted					0.997			0.959				
Satd. Flow (perm)	0	0	0	0	3518	0	0	1786	0	0	1621	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1082			82			565			1260	
Travel Time (s)		29.5			2.2			15.4			34.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	30	553	11	36	6	0	0	1	24
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	594	0	0	42	0	0	25	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 30.2%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	1.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	0	27	498	10	32	5	0	0	1	22
Future Vol, veh/h	0	0	0	27	498	10	32	5	0	0	1	22
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	30	553	11	36	6	0	0	1	24

Major/Minor	Major2			Minor1			Minor2			
Conflicting Flow All	0	0	0	337	624	-	-	619	282	
Stage 1	-	-	-	0	0	-	-	619	-	
Stage 2	-	-	-	337	624	-	-	0	-	
Critical Hdwy	4.14	-	-	7.54	6.54	-	-	6.54	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	-	5.54	-	
Critical Hdwy Stg 2	-	-	-	6.54	5.54	-	-	-	-	
Follow-up Hdwy	2.22	-	-	3.52	4.02	-	-	4.02	3.32	
Pot Cap-1 Maneuver	-	-	-	593	400	0	0	403	715	
Stage 1	-	-	-	-	-	0	0	478	-	
Stage 2	-	-	-	651	476	0	0	-	-	
Platoon blocked, %		-	-							
Mov Cap-1 Maneuver	-	-	-	572	400	-	-	403	715	
Mov Cap-2 Maneuver	-	-	-	572	400	-	-	403	-	
Stage 1	-	-	-	-	-	-	-	478	-	
Stage 2	-	-	-	627	476	-	-	-	-	

Approach	WB	NB	SB
HCM Ctrl Dly, s/v		12.2	10.4
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	541	-	-	-	692
HCM Lane V/C Ratio	0.076	-	-	-	0.037
HCM Ctrl Dly (s/v)	12.2	-	-	-	10.4
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.2	-	-	-	0.1



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	6	402	13	0	0	0	0	7	20	2	13	0
Future Volume (vph)	6	402	13	0	0	0	0	7	20	2	13	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.996						0.901				
Flt Protected		0.999									0.994	
Satd. Flow (prot)	0	3522	0	0	0	0	0	1678	0	0	1852	0
Flt Permitted		0.999									0.994	
Satd. Flow (perm)	0	3522	0	0	0	0	0	1678	0	0	1852	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1197			85			1027			565	
Travel Time (s)		32.6			2.3			28.0			15.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	7	447	14	0	0	0	0	8	22	2	14	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	468	0	0	0	0	0	30	0	0	16	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 21.7%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	6	402	13	0	0	0	0	7	20	2	13	0
Future Vol, veh/h	6	402	13	0	0	0	0	7	20	2	13	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	7	447	14	0	0	0	0	8	22	2	14	0

Major/Minor	Major1			Minor1			Minor2		
Conflicting Flow All	0	0	0	-	468	231	242	475	-
Stage 1	-	-	-	-	468	-	0	0	-
Stage 2	-	-	-	-	0	-	242	475	-
Critical Hdwy	4.14	-	-	-	6.54	6.94	7.54	6.54	-
Critical Hdwy Stg 1	-	-	-	-	5.54	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-
Follow-up Hdwy	2.22	-	-	-	4.02	3.32	3.52	4.02	-
Pot Cap-1 Maneuver	-	-	-	0	491	771	692	487	0
Stage 1	-	-	-	0	560	-	-	-	0
Stage 2	-	-	-	0	-	-	740	556	0
Platoon blocked, %		-	-						
Mov Cap-1 Maneuver	-	-	-	-	491	771	664	487	-
Mov Cap-2 Maneuver	-	-	-	-	491	-	664	487	-
Stage 1	-	-	-	-	560	-	-	-	-
Stage 2	-	-	-	-	-	-	709	556	-

Approach	EB	NB	SB
HCM Ctrl Dly, s/v		10.6	12.4
HCM LOS		B	B


Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	SBLn1
Capacity (veh/h)	672	-	-	-	505
HCM Lane V/C Ratio	0.045	-	-	-	0.033
HCM Ctrl Dly (s/v)	10.6	-	-	-	12.4
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.1	-	-	-	0.1


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	76	371	167	59	506	0	0	834	77
Future Volume (vph)	0	0	0	76	371	167	59	506	0	0	834	77
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	125		0
Storage Lanes	0		0	0		0	1		0	0		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.959						0.989	
Flt Protected					0.994		0.950					
Satd. Flow (prot)	0	0	0	0	3374	0	1770	1863	0	0	1842	0
Flt Permitted					0.994		0.083					
Satd. Flow (perm)	0	0	0	0	3374	0	155	1863	0	0	1842	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					50						8	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		82			413			570			1253	
Travel Time (s)		2.2			11.3			11.1			24.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	84	412	186	66	562	0	0	927	86
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	682	0	66	562	0	0	1013	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors				1	2		1	2			2	
Detector Template				Left	Thru		Left	Thru			Thru	
Leading Detector (ft)				20	100		20	100			100	
Trailing Detector (ft)				0	0		0	0			0	
Detector 1 Position(ft)				0	0		0	0			0	
Detector 1 Size(ft)				20	6		20	6			6	
Detector 1 Type				Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Queue (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Delay (s)				0.0	0.0		0.0	0.0			0.0	
Detector 2 Position(ft)					94			94			94	
Detector 2 Size(ft)					6			6			6	
Detector 2 Type					Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0			0.0	
Turn Type				Perm	NA		pm+pt	NA			NA	
Protected Phases					8		5	2			6	
Permitted Phases				8			2					

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase				8	8		5	2			6	
Switch Phase												
Minimum Initial (s)				7.0	7.0		5.0	12.0			12.0	
Minimum Split (s)				22.5	22.5		9.5	22.5			22.5	
Total Split (s)				27.0	27.0		10.0	73.0			63.0	
Total Split (%)				27.0%	27.0%		10.0%	73.0%			63.0%	
Maximum Green (s)				22.5	22.5		5.5	68.5			58.5	
Yellow Time (s)				3.5	3.5		3.5	3.5			3.5	
All-Red Time (s)				1.0	1.0		1.0	1.0			1.0	
Lost Time Adjust (s)					0.0		0.0	0.0			0.0	
Total Lost Time (s)					4.5		4.5	4.5			4.5	
Lead/Lag							Lag				Lead	
Lead-Lag Optimize?							Yes				Yes	
Vehicle Extension (s)				3.0	3.0		3.0	3.0			3.0	
Recall Mode				None	None		None	C-Max			C-Max	
Walk Time (s)				7.0	7.0			7.0			7.0	
Flash Don't Walk (s)				11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)				0	0			0			0	
Act Effct Green (s)					21.9		69.1	69.1			61.1	
Actuated g/C Ratio					0.22		0.69	0.69			0.61	
v/c Ratio					0.88		0.34	0.44			0.90	
Control Delay (s/veh)					48.6		7.7	2.0			30.5	
Queue Delay					0.0		0.0	0.5			0.0	
Total Delay (s/veh)					48.6		7.7	2.4			30.5	
LOS					D		A	A			C	
Approach Delay (s/veh)					48.6			3.0			30.5	
Approach LOS					D			A			C	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 38 (38%), Referenced to phase 2:NBTL and 6:SBT, Start of Green			
Natural Cycle: 90			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.90			
Intersection Signal Delay (s/veh): 28.4		Intersection LOS: C	
Intersection Capacity Utilization 82.8%		ICU Level of Service E	
Analysis Period (min) 15			

Splits and Phases: 1: NE Main Street (SC 417) & College Street

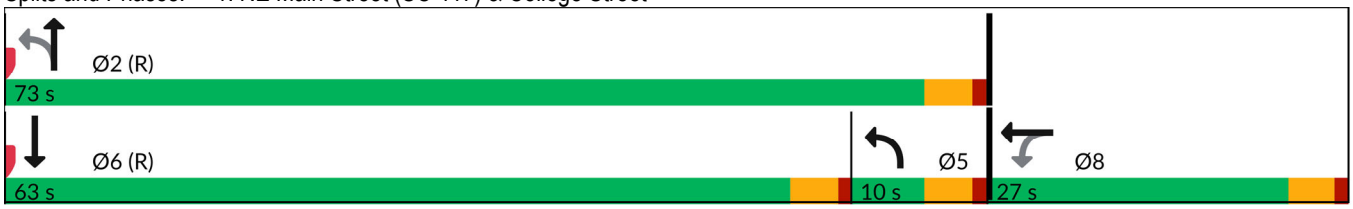




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	52	455	51	0	0	0	0	454	221	333	551	0
Future Volume (vph)	52	455	51	0	0	0	0	454	221	333	551	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	225		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.986						0.956				
Flt Protected		0.995								0.950		
Satd. Flow (prot)	0	3472	0	0	0	0	0	1781	0	1770	1863	0
Flt Permitted		0.995								0.144		
Satd. Flow (perm)	0	3472	0	0	0	0	0	1781	0	268	1863	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		10						33				
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		85			379			1084			570	
Travel Time (s)		2.3			10.3			21.1			11.1	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	58	506	57	0	0	0	0	504	246	370	612	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	621	0	0	0	0	0	750	0	370	612	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	
Turn Type	Perm	NA						NA		pm+pt	NA	
Protected Phases		4						2		1	6	
Permitted Phases	4									6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4						2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0						12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5						22.5		9.5	22.5	
Total Split (s)	25.0	25.0						52.0		23.0	75.0	
Total Split (%)	25.0%	25.0%						52.0%		23.0%	75.0%	
Maximum Green (s)	20.5	20.5						47.5		18.5	70.5	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0		0.0	0.0	
Total Lost Time (s)		4.5						4.5		4.5	4.5	
Lead/Lag								Lead		Lag		
Lead-Lag Optimize?								Yes		Yes		
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	None	None						C-Max		None	C-Max	
Walk Time (s)	7.0	7.0						7.0			7.0	
Flash Don't Walk (s)	11.0	11.0						11.0			11.0	
Pedestrian Calls (#/hr)	0	0						0			0	
Act Effct Green (s)		20.0						48.0		71.0	71.0	
Actuated g/C Ratio		0.20						0.48		0.71	0.71	
v/c Ratio		0.88						0.86		0.79	0.46	
Control Delay (s/veh)		54.0						34.1		20.2	1.5	
Queue Delay		0.0						0.0		0.7	0.4	
Total Delay (s/veh)		54.0						34.1		21.0	1.9	
LOS		D						C		C	A	
Approach Delay (s/veh)		54.0						34.1			9.1	
Approach LOS		D						C			A	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 39 (39%), Referenced to phase 2:NBT and 6:SBTL, Start of Green			
Natural Cycle: 90			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.88			
Intersection Signal Delay (s/veh): 28.9		Intersection LOS: C	
Intersection Capacity Utilization 82.8%		ICU Level of Service E	
Analysis Period (min) 15			

Splits and Phases: 2: NE Main Street (SC 417) & Curtis Street

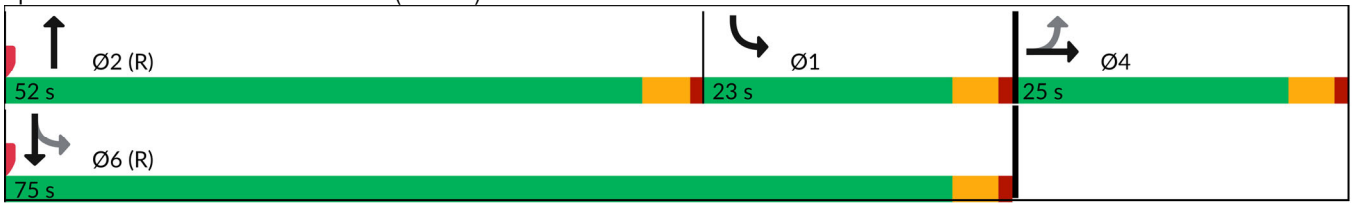



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	0	0	138	576	21	0
Future Volume (vph)	0	0	138	576	21	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	0.95	0.95	1.00	1.00
Frt						
Flt Protected				0.990	0.950	
Satd. Flow (prot)	0	0	0	3504	1770	0
Flt Permitted				0.990	0.950	
Satd. Flow (perm)	0	0	0	3504	1770	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	413			1158	568	
Travel Time (s)	11.3			31.6	15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	153	640	23	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	793	23	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 29.9%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	0.4

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	0	0	138	576	21	0
Future Vol, veh/h	0	0	138	576	21	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	153	640	23	0

Major/Minor	Major2		Minor1	
Conflicting Flow All	0	0	626	-
Stage 1	-	-	0	-
Stage 2	-	-	626	-
Critical Hdwy	4.14	-	6.84	-
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	5.84	-
Follow-up Hdwy	2.22	-	3.52	-
Pot Cap-1 Maneuver	-	-	416	0
Stage 1	-	-	-	0
Stage 2	-	-	495	0
Platoon blocked, %		-		
Mov Cap-1 Maneuver	-	-	416	-
Mov Cap-2 Maneuver	-	-	416	-
Stage 1	-	-	-	-
Stage 2	-	-	495	-

Approach	WB	NB
HCM Ctrl Dly, s/v		14.2
HCM LOS		B


Minor Lane/Major Mvmt	NBLn1	WBL	WBT
Capacity (veh/h)	416	-	-
HCM Lane V/C Ratio	0.056	-	-
HCM Ctrl Dly (s/v)	14.2	-	-
HCM Lane LOS	B	-	-
HCM 95th %tile Q (veh)	0.2	-	-


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	17	926	153	0	0	0	0	29	281	114	10	0
Future Volume (vph)	17	926	153	0	0	0	0	29	281	114	10	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.979						0.878				
Flt Protected		0.999									0.956	
Satd. Flow (prot)	0	3461	0	0	0	0	0	1635	0	0	1781	0
Flt Permitted		0.999									0.956	
Satd. Flow (perm)	0	3461	0	0	0	0	0	1635	0	0	1781	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		23						165				
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		379			1213			1024			568	
Travel Time (s)		10.3			33.1			27.9			15.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	19	1029	170	0	0	0	0	32	312	127	11	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	1218	0	0	0	0	0	344	0	0	138	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						1		1	1	
Detector Template	Left	Thru								Left		
Leading Detector (ft)	20	100						30		20	30	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						30		20	30	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94										
Detector 2 Size(ft)		6										
Detector 2 Type		Cl+Ex										
Detector 2 Channel												
Detector 2 Extend (s)		0.0										
Turn Type	Perm	NA						NA		Split	NA	
Protected Phases		2						4		8	8	
Permitted Phases	2											
Detector Phase	2	2						4		8	8	
Switch Phase												
Minimum Initial (s)	7.0	7.0						7.0		7.0	7.0	

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Split (s)	22.5	22.5						22.5		22.5	22.5	
Total Split (s)	49.2	49.2						28.0		22.8	22.8	
Total Split (%)	49.2%	49.2%						28.0%		22.8%	22.8%	
Maximum Green (s)	44.7	44.7						23.5		18.3	18.3	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0			0.0	
Total Lost Time (s)		4.5						4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	C-Max	C-Max						None		None	None	
Walk Time (s)	7.0	7.0						7.0		7.0	7.0	
Flash Don't Walk (s)	11.0	11.0						11.0		11.0	11.0	
Pedestrian Calls (#/hr)	0	0						0		0	0	
Act Effct Green (s)		56.8						16.7			13.0	
Actuated g/C Ratio		0.57						0.17			0.13	
v/c Ratio		0.62						0.84			0.60	
Control Delay (s/veh)		9.8						38.3			51.2	
Queue Delay		0.5						0.0			0.0	
Total Delay (s/veh)		10.2						38.3			51.2	
LOS		B						D			D	
Approach Delay (s/veh)		10.2						38.3			51.2	
Approach LOS		B						D			D	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 0 (0%), Referenced to phase 2:EBTL, Start of Green			
Natural Cycle: 80			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.84			
Intersection Signal Delay (s/veh): 19.2		Intersection LOS: B	
Intersection Capacity Utilization 67.9%		ICU Level of Service C	
Analysis Period (min) 15			

Splits and Phases: 4: Hedge Street & Curtis Street





Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	59	445	4	45	3	0	0	15	30
Future Volume (vph)	0	0	0	59	445	4	45	3	0	0	15	30
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.999						0.911	
Flt Protected					0.994			0.955				
Satd. Flow (prot)	0	0	0	0	3514	0	0	1779	0	0	1697	0
Flt Permitted					0.994			0.955				
Satd. Flow (perm)	0	0	0	0	3514	0	0	1779	0	0	1697	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1082			82			565			1260	
Travel Time (s)		29.5			2.2			15.4			34.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	66	494	4	50	3	0	0	17	33
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	564	0	0	53	0	0	50	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 30.1%		ICU Level of Service A	
Analysis Period (min) 15			


Intersection	
Int Delay, s/veh	1.9

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	0	59	445	4	45	3	0	0	15	30
Future Vol, veh/h	0	0	0	59	445	4	45	3	0	0	15	30
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	66	494	4	50	3	0	0	17	33

Major/Minor	Major2			Minor1			Minor2			
Conflicting Flow All	0	0	0	388	630	-	-	628	249	
Stage 1	-	-	-	0	0	-	-	628	-	
Stage 2	-	-	-	388	630	-	-	0	-	
Critical Hdwy	4.14	-	-	7.54	6.54	-	-	6.54	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	-	5.54	-	
Critical Hdwy Stg 2	-	-	-	6.54	5.54	-	-	-	-	
Follow-up Hdwy	2.22	-	-	3.52	4.02	-	-	4.02	3.32	
Pot Cap-1 Maneuver	-	-	-	545	397	0	0	398	751	
Stage 1	-	-	-	-	-	0	0	474	-	
Stage 2	-	-	-	607	473	0	0	-	-	
Platoon blocked, %		-	-							
Mov Cap-1 Maneuver	-	-	-	504	397	-	-	398	751	
Mov Cap-2 Maneuver	-	-	-	504	397	-	-	398	-	
Stage 1	-	-	-	-	-	-	-	474	-	
Stage 2	-	-	-	560	473	-	-	-	-	

Approach	WB	NB	SB
HCM Ctrl Dly, s/v		13.1	11.8
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	496	-	-	-	580
HCM Lane V/C Ratio	0.108	-	-	-	0.086
HCM Ctrl Dly (s/v)	13.1	-	-	-	11.8
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.4	-	-	-	0.3



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	7	501	4	0	0	0	0	3	31	27	31	0
Future Volume (vph)	7	501	4	0	0	0	0	3	31	27	31	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999						0.876				
Flt Protected		0.999									0.977	
Satd. Flow (prot)	0	3532	0	0	0	0	0	1632	0	0	1820	0
Flt Permitted		0.999									0.977	
Satd. Flow (perm)	0	3532	0	0	0	0	0	1632	0	0	1820	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1197			85			1027			565	
Travel Time (s)		32.6			2.3			28.0			15.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	8	557	4	0	0	0	0	3	34	30	34	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	569	0	0	0	0	0	37	0	0	64	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 30.6%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	1.9

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	7	501	4	0	0	0	0	3	31	27	31	0
Future Vol, veh/h	7	501	4	0	0	0	0	3	31	27	31	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	8	557	4	0	0	0	0	3	34	30	34	0

Major/Minor	Major1			Minor1			Minor2		
Conflicting Flow All	0	0	0	-	575	281	296	577	-
Stage 1	-	-	-	-	575	-	0	0	-
Stage 2	-	-	-	-	0	-	296	577	-
Critical Hdwy	4.14	-	-	-	6.54	6.94	7.54	6.54	-
Critical Hdwy Stg 1	-	-	-	-	5.54	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-
Follow-up Hdwy	2.22	-	-	-	4.02	3.32	3.52	4.02	-
Pot Cap-1 Maneuver	-	-	-	0	427	716	634	426	0
Stage 1	-	-	-	0	501	-	-	-	0
Stage 2	-	-	-	0	-	-	688	500	0
Platoon blocked, %		-	-						
Mov Cap-1 Maneuver	-	-	-	-	427	716	600	426	-
Mov Cap-2 Maneuver	-	-	-	-	427	-	600	426	-
Stage 1	-	-	-	-	501	-	-	-	-
Stage 2	-	-	-	-	-	-	651	500	-

Approach	EB	NB	SB
HCM Ctrl Dly, s/v		10.6	13.4
HCM LOS		B	B


Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	SBLn1
Capacity (veh/h)	676	-	-	-	492
HCM Lane V/C Ratio	0.056	-	-	-	0.131
HCM Ctrl Dly (s/v)	10.6	-	-	-	13.4
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.2	-	-	-	0.4


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	129	472	352	30	495	0	0	620	42
Future Volume (vph)	0	0	0	129	472	352	30	495	0	0	620	42
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	125		0
Storage Lanes	0		0	0		0	1		0	0		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.945						0.991	
Flt Protected					0.993		0.950					
Satd. Flow (prot)	0	0	0	0	3321	0	1770	1863	0	0	1846	0
Flt Permitted					0.993		0.179					
Satd. Flow (perm)	0	0	0	0	3321	0	333	1863	0	0	1846	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					128						5	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		82			314			570			1253	
Travel Time (s)		2.2			8.6			11.1			24.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	143	524	391	33	550	0	0	689	47
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	1058	0	33	550	0	0	736	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors				1	2		1	2			2	
Detector Template				Left	Thru		Left	Thru			Thru	
Leading Detector (ft)				20	100		20	100			100	
Trailing Detector (ft)				0	0		0	0			0	
Detector 1 Position(ft)				0	0		0	0			0	
Detector 1 Size(ft)				20	6		20	6			6	
Detector 1 Type				Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Queue (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Delay (s)				0.0	0.0		0.0	0.0			0.0	
Detector 2 Position(ft)					94			94			94	
Detector 2 Size(ft)					6			6			6	
Detector 2 Type					Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0			0.0	
Turn Type				Perm	NA		pm+pt	NA			NA	
Protected Phases					8		5	2			6	
Permitted Phases				8			2					

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase				8	8		5	2			6	
Switch Phase												
Minimum Initial (s)				7.0	7.0		5.0	12.0			12.0	
Minimum Split (s)				22.5	22.5		9.5	22.5			22.5	
Total Split (s)				38.0	38.0		9.6	62.0			52.4	
Total Split (%)				38.0%	38.0%		9.6%	62.0%			52.4%	
Maximum Green (s)				33.5	33.5		5.1	57.5			47.9	
Yellow Time (s)				3.5	3.5		3.5	3.5			3.5	
All-Red Time (s)				1.0	1.0		1.0	1.0			1.0	
Lost Time Adjust (s)					0.0		0.0	0.0			0.0	
Total Lost Time (s)					4.5		4.5	4.5			4.5	
Lead/Lag							Lag				Lead	
Lead-Lag Optimize?							Yes				Yes	
Vehicle Extension (s)				3.0	3.0		3.0	3.0			3.0	
Recall Mode				None	None		None	C-Max			C-Max	
Walk Time (s)				7.0	7.0			7.0			7.0	
Flash Don't Walk (s)				11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)				0	0			0			0	
Act Effct Green (s)					32.7		58.3	58.3			52.5	
Actuated g/C Ratio					0.33		0.58	0.58			0.53	
v/c Ratio					0.90		0.12	0.51			0.76	
Control Delay (s/veh)					39.8		3.1	4.0			26.5	
Queue Delay					0.0		0.0	0.1			0.0	
Total Delay (s/veh)					39.8		3.1	4.2			26.5	
LOS					D		A	A			C	
Approach Delay (s/veh)					39.8			4.1			26.5	
Approach LOS					D			A			C	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 14 (14%), Referenced to phase 2:NBTL and 6:SBT, Start of Green			
Natural Cycle: 80			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.90			
Intersection Signal Delay (s/veh): 26.9		Intersection LOS: C	
Intersection Capacity Utilization 78.7%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 1: NE Main Street (SC 417) & College Street

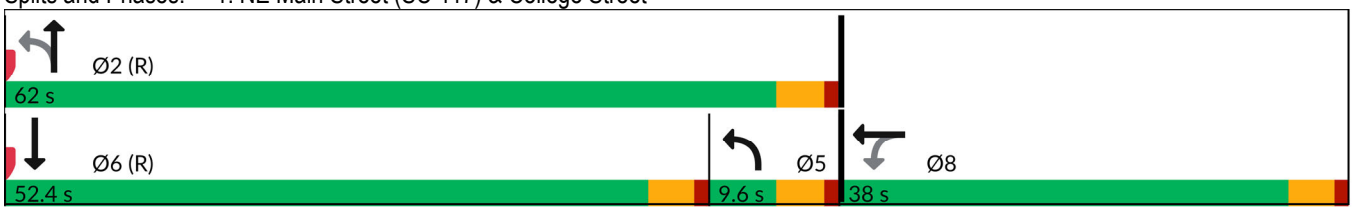




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	65	339	27	0	0	0	0	441	67	199	540	0
Future Volume (vph)	65	339	27	0	0	0	0	441	67	199	540	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	225		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.991						0.982				
Flt Protected		0.993								0.950		
Satd. Flow (prot)	0	3483	0	0	0	0	0	1829	0	1770	1863	0
Flt Permitted		0.993								0.326		
Satd. Flow (perm)	0	3483	0	0	0	0	0	1829	0	607	1863	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		6						11				
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		85			379			1084			570	
Travel Time (s)		2.3			10.3			21.1			11.1	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	72	377	30	0	0	0	0	490	74	221	600	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	479	0	0	0	0	0	564	0	221	600	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	
Turn Type	Perm	NA						NA		pm+pt	NA	
Protected Phases		4						2		1	6	
Permitted Phases	4									6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4						2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0						12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5						22.5		9.5	22.5	
Total Split (s)	27.0	27.0						55.0		18.0	73.0	
Total Split (%)	27.0%	27.0%						55.0%		18.0%	73.0%	
Maximum Green (s)	22.5	22.5						50.5		13.5	68.5	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0		0.0	0.0	
Total Lost Time (s)		4.5						4.5		4.5	4.5	
Lead/Lag								Lead		Lag		
Lead-Lag Optimize?								Yes		Yes		
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	None	None						C-Max		None	C-Max	
Walk Time (s)	7.0	7.0						7.0			7.0	
Flash Don't Walk (s)	11.0	11.0						11.0			11.0	
Pedestrian Calls (#/hr)	0	0						0			0	
Act Effct Green (s)		18.9						54.1		72.1	72.1	
Actuated g/C Ratio		0.19						0.54		0.72	0.72	
v/c Ratio		0.72						0.57		0.37	0.45	
Control Delay (s/veh)		44.0						18.4		2.7	2.2	
Queue Delay		0.0						0.0		0.0	0.3	
Total Delay (s/veh)		44.0						18.4		2.7	2.5	
LOS		D						B		A	A	
Approach Delay (s/veh)		44.0						18.4			2.6	
Approach LOS		D						B			A	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 9 (9%), Referenced to phase 2:NBT and 6:SBTL, Start of Green			
Natural Cycle: 60			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.72			
Intersection Signal Delay (s/veh): 18.0		Intersection LOS: B	
Intersection Capacity Utilization 78.7%		ICU Level of Service D	
Analysis Period (min) 15			

Splits and Phases: 2: NE Main Street (SC 417) & Curtis Street

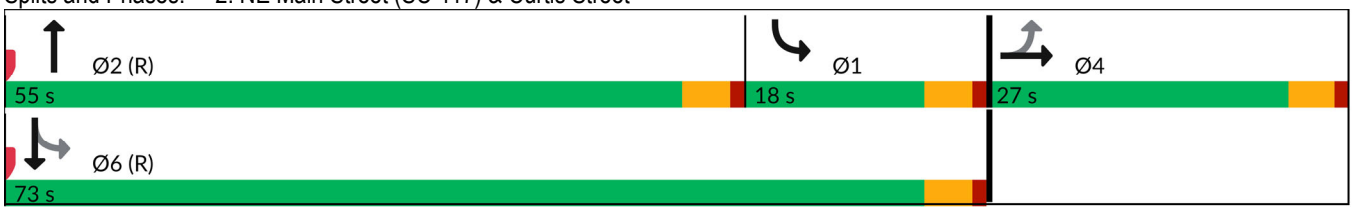



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	0	0	217	893	31	0
Future Volume (vph)	0	0	217	893	31	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	0.95	0.95	1.00	1.00
Frt						
Flt Protected				0.990	0.950	
Satd. Flow (prot)	0	0	0	3504	1770	0
Flt Permitted				0.990	0.950	
Satd. Flow (perm)	0	0	0	3504	1770	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	99			1158	256	
Travel Time (s)	2.7			31.6	7.0	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	241	992	34	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	1233	34	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 41.0%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	0.6

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	0	0	217	893	31	0
Future Vol, veh/h	0	0	217	893	31	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	241	992	34	0

Major/Minor	Major2		Minor1	
Conflicting Flow All	0	0	978	-
Stage 1	-	-	0	-
Stage 2	-	-	978	-
Critical Hdwy	4.14	-	6.84	-
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	5.84	-
Follow-up Hdwy	2.22	-	3.52	-
Pot Cap-1 Maneuver	-	-	248	0
Stage 1	-	-	-	0
Stage 2	-	-	325	0
Platoon blocked, %		-		
Mov Cap-1 Maneuver	-	-	248	-
Mov Cap-2 Maneuver	-	-	248	-
Stage 1	-	-	-	-
Stage 2	-	-	325	-

Approach	WB	NB
HCM Ctrl Dly, s/v		21.8
HCM LOS		C


Minor Lane/Major Mvmt	NBLn1	WBL	WBT
Capacity (veh/h)	248	-	-
HCM Lane V/C Ratio	0.139	-	-
HCM Ctrl Dly (s/v)	21.8	-	-
HCM Lane LOS	C	-	-
HCM 95th %tile Q (veh)	0.5	-	-


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	23	501	54	0	0	0	0	31	194	49	185	0
Future Volume (vph)	23	501	54	0	0	0	0	31	194	49	185	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.986						0.883				
Flt Protected		0.998									0.990	
Satd. Flow (prot)	0	3483	0	0	0	0	0	1645	0	0	1844	0
Flt Permitted		0.998									0.990	
Satd. Flow (perm)	0	3483	0	0	0	0	0	1645	0	0	1844	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		12						216				
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		379			1213			1024			312	
Travel Time (s)		10.3			33.1			27.9			8.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	26	557	60	0	0	0	0	34	216	54	206	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	643	0	0	0	0	0	250	0	0	260	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						1		1	1	
Detector Template	Left	Thru								Left		
Leading Detector (ft)	20	100						30		20	30	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						30		20	30	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94										
Detector 2 Size(ft)		6										
Detector 2 Type		Cl+Ex										
Detector 2 Channel												
Detector 2 Extend (s)		0.0										
Turn Type	Perm	NA						NA		Split	NA	
Protected Phases		2						4		8	8	
Permitted Phases	2											
Detector Phase	2	2						4		8	8	
Switch Phase												
Minimum Initial (s)	7.0	7.0						7.0		7.0	7.0	

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Split (s)	22.5	22.5						22.5		22.5	22.5	
Total Split (s)	38.0	38.0						29.0		33.0	33.0	
Total Split (%)	38.0%	38.0%						29.0%		33.0%	33.0%	
Maximum Green (s)	33.5	33.5						24.5		28.5	28.5	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0			0.0	
Total Lost Time (s)		4.5						4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	C-Max	C-Max						None		None	None	
Walk Time (s)	7.0	7.0						7.0		7.0	7.0	
Flash Don't Walk (s)	11.0	11.0						11.0		11.0	11.0	
Pedestrian Calls (#/hr)	0	0						0		0	0	
Act Effct Green (s)		57.3						9.8			19.3	
Actuated g/C Ratio		0.57						0.10			0.19	
v/c Ratio		0.32						0.70			0.73	
Control Delay (s/veh)		7.4						19.9			49.5	
Queue Delay		0.2						0.0			0.0	
Total Delay (s/veh)		7.6						19.9			49.5	
LOS		A						B			D	
Approach Delay (s/veh)		7.6						19.9			49.5	
Approach LOS		A						B			D	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 76 (76%), Referenced to phase 2:EBTL, Start of Green			
Natural Cycle: 70			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.73			
Intersection Signal Delay (s/veh): 19.7		Intersection LOS: B	
Intersection Capacity Utilization 53.5%		ICU Level of Service A	
Analysis Period (min) 15			

Splits and Phases: 4: Hedge Street & Curtis Street





Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	27	508	10	32	5	0	0	1	22
Future Volume (vph)	0	0	0	27	508	10	32	5	0	0	1	22
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.997						0.870	
Flt Protected					0.998			0.959				
Satd. Flow (prot)	0	0	0	0	3522	0	0	1786	0	0	1621	0
Flt Permitted					0.998			0.959				
Satd. Flow (perm)	0	0	0	0	3522	0	0	1786	0	0	1621	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1082			82			565			1260	
Travel Time (s)		29.5			2.2			15.4			34.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	30	564	11	36	6	0	0	1	24
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	605	0	0	42	0	0	25	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 30.5%		ICU Level of Service A	
Analysis Period (min) 15			


Intersection	
Int Delay, s/veh	1.2

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	0	27	508	10	32	5	0	0	1	22
Future Vol, veh/h	0	0	0	27	508	10	32	5	0	0	1	22
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	30	564	11	36	6	0	0	1	24

Major/Minor	Major2			Minor1			Minor2			
Conflicting Flow All	0	0	0	343	635	-	-	630	288	
Stage 1	-	-	-	0	0	-	-	630	-	
Stage 2	-	-	-	343	635	-	-	0	-	
Critical Hdwy	4.14	-	-	7.54	6.54	-	-	6.54	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	-	5.54	-	
Critical Hdwy Stg 2	-	-	-	6.54	5.54	-	-	-	-	
Follow-up Hdwy	2.22	-	-	3.52	4.02	-	-	4.02	3.32	
Pot Cap-1 Maneuver	-	-	-	587	394	0	0	397	709	
Stage 1	-	-	-	-	-	0	0	473	-	
Stage 2	-	-	-	646	471	0	0	-	-	
Platoon blocked, %		-	-							
Mov Cap-1 Maneuver	-	-	-	565	394	-	-	397	709	
Mov Cap-2 Maneuver	-	-	-	565	394	-	-	397	-	
Stage 1	-	-	-	-	-	-	-	473	-	
Stage 2	-	-	-	622	471	-	-	-	-	

Approach	WB	NB	SB
HCM Ctrl Dly, s/v		12.3	10.5
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	534	-	-	-	686
HCM Lane V/C Ratio	0.077	-	-	-	0.037
HCM Ctrl Dly (s/v)	12.3	-	-	-	10.5
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.2	-	-	-	0.1



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	6	408	13	0	0	0	0	7	20	2	13	0
Future Volume (vph)	6	408	13	0	0	0	0	7	20	2	13	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.996						0.901				
Flt Protected		0.999									0.994	
Satd. Flow (prot)	0	3522	0	0	0	0	0	1678	0	0	1852	0
Flt Permitted		0.999									0.994	
Satd. Flow (perm)	0	3522	0	0	0	0	0	1678	0	0	1852	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1197			85			1027			565	
Travel Time (s)		32.6			2.3			28.0			15.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	7	453	14	0	0	0	0	8	22	2	14	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	474	0	0	0	0	0	30	0	0	16	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 21.9%		ICU Level of Service A	
Analysis Period (min) 15			


Intersection	
Int Delay, s/veh	1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	6	408	13	0	0	0	0	7	20	2	13	0
Future Vol, veh/h	6	408	13	0	0	0	0	7	20	2	13	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	7	453	14	0	0	0	0	8	22	2	14	0

Major/Minor	Major1			Minor1			Minor2		
Conflicting Flow All	0	0	0	-	474	234	245	481	-
Stage 1	-	-	-	-	474	-	0	0	-
Stage 2	-	-	-	-	0	-	245	481	-
Critical Hdwy	4.14	-	-	-	6.54	6.94	7.54	6.54	-
Critical Hdwy Stg 1	-	-	-	-	5.54	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-
Follow-up Hdwy	2.22	-	-	-	4.02	3.32	3.52	4.02	-
Pot Cap-1 Maneuver	-	-	-	0	488	768	688	483	0
Stage 1	-	-	-	0	556	-	-	-	0
Stage 2	-	-	-	0	-	-	737	552	0
Platoon blocked, %		-	-						
Mov Cap-1 Maneuver	-	-	-	-	488	768	660	483	-
Mov Cap-2 Maneuver	-	-	-	-	488	-	660	483	-
Stage 1	-	-	-	-	556	-	-	-	-
Stage 2	-	-	-	-	-	-	706	552	-

Approach	EB	NB	SB
HCM Ctrl Dly, s/v		10.6	12.4
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	SBLn1
Capacity (veh/h)	669	-	-	-	501
HCM Lane V/C Ratio	0.045	-	-	-	0.033
HCM Ctrl Dly (s/v)	10.6	-	-	-	12.4
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.1	-	-	-	0.1



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	7	17	22	32	217	4
Future Volume (vph)	7	17	22	32	217	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.905				0.998	
Flt Protected	0.985			0.980		
Satd. Flow (prot)	1660	0	0	1825	1859	0
Flt Permitted	0.985			0.980		
Satd. Flow (perm)	1660	0	0	1825	1859	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	1169			312	256	
Travel Time (s)	31.9			8.5	7.0	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	8	19	24	36	241	4
Shared Lane Traffic (%)						
Lane Group Flow (vph)	27	0	0	60	245	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 28.3%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	1.4

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	7	17	22	32	217	4
Future Vol, veh/h	7	17	22	32	217	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	8	19	24	36	241	4

Major/Minor	Minor2		Major1		Major2	
Conflicting Flow All	327	243	245	0	-	0
Stage 1	243	-	-	-	-	-
Stage 2	84	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	667	796	1321	-	-	-
Stage 1	797	-	-	-	-	-
Stage 2	939	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	654	796	1321	-	-	-
Mov Cap-2 Maneuver	654	-	-	-	-	-
Stage 1	782	-	-	-	-	-
Stage 2	939	-	-	-	-	-

Approach	EB	NB	SB
HCM Ctrl Dly, s/v	10	3.2	0
HCM LOS	B		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1321	-	749	-	-
HCM Lane V/C Ratio	0.019	-	0.036	-	-
HCM Ctrl Dly (s/v)	7.8	0	10	-	-
HCM Lane LOS	A	A	B	-	-
HCM 95th %tile Q (veh)	0.1	-	0.1	-	-

Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	0	0	3	921	25	0
Future Volume (vph)	0	0	3	921	25	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	0.95	0.95	1.00	1.00
Frt						
Flt Protected					0.950	
Satd. Flow (prot)	0	0	0	3539	1770	0
Flt Permitted					0.950	
Satd. Flow (perm)	0	0	0	3539	1770	0
Link Speed (mph)	25			25	30	
Link Distance (ft)	314			99	1024	
Travel Time (s)	8.6			2.7	23.3	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	3	1023	28	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	1026	28	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 35.5%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	0.3

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	0	0	3	921	25	0
Future Vol, veh/h	0	0	3	921	25	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	3	1023	28	0

Major/Minor	Major2		Minor1	
Conflicting Flow All	0	0	518	-
Stage 1	-	-	0	-
Stage 2	-	-	518	-
Critical Hdwy	4.14	-	6.84	-
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	5.84	-
Follow-up Hdwy	2.22	-	3.52	-
Pot Cap-1 Maneuver	-	-	487	0
Stage 1	-	-	-	0
Stage 2	-	-	563	0
Platoon blocked, %		-		
Mov Cap-1 Maneuver	-	-	487	-
Mov Cap-2 Maneuver	-	-	487	-
Stage 1	-	-	-	-
Stage 2	-	-	563	-

Approach	WB	NB
HCM Ctrl Dly, s/v		12.8
HCM LOS		B


Minor Lane/Major Mvmt	NBLn1	WBL	WBT
Capacity (veh/h)	487	-	-
HCM Lane V/C Ratio	0.057	-	-
HCM Ctrl Dly (s/v)	12.8	-	-
HCM Lane LOS	B	-	-
HCM 95th %tile Q (veh)	0.2	-	-


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	85	383	186	59	506	0	0	857	77
Future Volume (vph)	0	0	0	85	383	186	59	506	0	0	857	77
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	125		0
Storage Lanes	0		0	0		0	1		0	0		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.957						0.989	
Flt Protected					0.994		0.950					
Satd. Flow (prot)	0	0	0	0	3367	0	1770	1863	0	0	1842	0
Flt Permitted					0.994		0.063					
Satd. Flow (perm)	0	0	0	0	3367	0	117	1863	0	0	1842	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					55						8	
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		82			313			570			1253	
Travel Time (s)		2.2			8.5			11.1			24.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	94	426	207	66	562	0	0	952	86
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	727	0	66	562	0	0	1038	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors				1	2		1	2			2	
Detector Template				Left	Thru		Left	Thru			Thru	
Leading Detector (ft)				20	100		20	100			100	
Trailing Detector (ft)				0	0		0	0			0	
Detector 1 Position(ft)				0	0		0	0			0	
Detector 1 Size(ft)				20	6		20	6			6	
Detector 1 Type				Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Queue (s)				0.0	0.0		0.0	0.0			0.0	
Detector 1 Delay (s)				0.0	0.0		0.0	0.0			0.0	
Detector 2 Position(ft)					94			94			94	
Detector 2 Size(ft)					6			6			6	
Detector 2 Type					Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0			0.0	
Turn Type				Perm	NA		pm+pt	NA			NA	
Protected Phases					8		5	2			6	
Permitted Phases				8			2					

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase				8	8		5	2			6	
Switch Phase												
Minimum Initial (s)				7.0	7.0		5.0	12.0			12.0	
Minimum Split (s)				22.5	22.5		9.5	22.5			22.5	
Total Split (s)				27.0	27.0		10.0	73.0			63.0	
Total Split (%)				27.0%	27.0%		10.0%	73.0%			63.0%	
Maximum Green (s)				22.5	22.5		5.5	68.5			58.5	
Yellow Time (s)				3.5	3.5		3.5	3.5			3.5	
All-Red Time (s)				1.0	1.0		1.0	1.0			1.0	
Lost Time Adjust (s)					0.0		0.0	0.0			0.0	
Total Lost Time (s)					4.5		4.5	4.5			4.5	
Lead/Lag							Lag				Lead	
Lead-Lag Optimize?							Yes				Yes	
Vehicle Extension (s)				3.0	3.0		3.0	3.0			3.0	
Recall Mode				None	None		None	C-Max			C-Max	
Walk Time (s)				7.0	7.0			7.0			7.0	
Flash Don't Walk (s)				11.0	11.0			11.0			11.0	
Pedestrian Calls (#/hr)				0	0			0			0	
Act Effct Green (s)					22.3		68.7	68.7			60.7	
Actuated g/C Ratio					0.22		0.69	0.69			0.61	
v/c Ratio					0.92		0.39	0.44			0.93	
Control Delay (s/veh)					52.9		13.1	2.0			34.0	
Queue Delay					0.0		0.0	0.5			0.0	
Total Delay (s/veh)					52.9		13.1	2.5			34.0	
LOS					D		B	A			C	
Approach Delay (s/veh)					52.9			3.6			34.0	
Approach LOS					D			A			C	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 38 (38%), Referenced to phase 2:NBTL and 6:SBT, Start of Green			
Natural Cycle: 90			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.93			
Intersection Signal Delay (s/veh): 31.8		Intersection LOS: C	
Intersection Capacity Utilization 85.2%		ICU Level of Service E	
Analysis Period (min) 15			

Splits and Phases: 1: NE Main Street (SC 417) & College Street

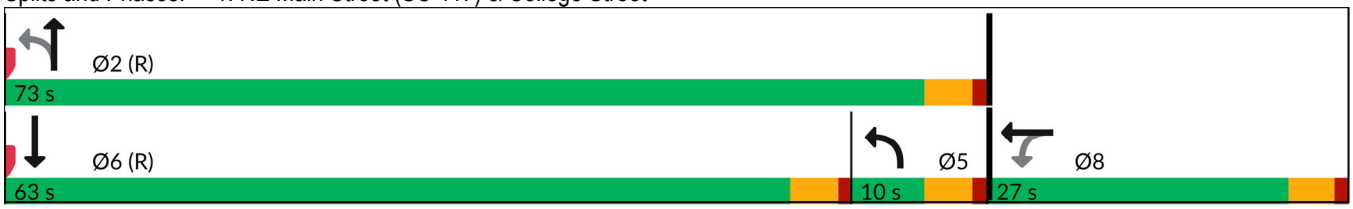




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	52	470	51	0	0	0	0	454	233	356	560	0
Future Volume (vph)	52	470	51	0	0	0	0	454	233	356	560	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	150		0	225		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	100			100			100			100		
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.987						0.954				
Flt Protected		0.995								0.950		
Satd. Flow (prot)	0	3476	0	0	0	0	0	1777	0	1770	1863	0
Flt Permitted		0.995								0.131		
Satd. Flow (perm)	0	3476	0	0	0	0	0	1777	0	244	1863	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		9						35				
Link Speed (mph)		25			25			35			35	
Link Distance (ft)		85			379			1084			570	
Travel Time (s)		2.3			10.3			21.1			11.1	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	58	522	57	0	0	0	0	504	259	396	622	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	637	0	0	0	0	0	763	0	396	622	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	
Turn Type	Perm	NA						NA		pm+pt	NA	
Protected Phases		4						2		1	6	
Permitted Phases	4									6		

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4						2		1	6	
Switch Phase												
Minimum Initial (s)	7.0	7.0						12.0		5.0	12.0	
Minimum Split (s)	22.5	22.5						22.5		9.5	22.5	
Total Split (s)	25.0	25.0						52.0		23.0	75.0	
Total Split (%)	25.0%	25.0%						52.0%		23.0%	75.0%	
Maximum Green (s)	20.5	20.5						47.5		18.5	70.5	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0		0.0	0.0	
Total Lost Time (s)		4.5						4.5		4.5	4.5	
Lead/Lag								Lead		Lag		
Lead-Lag Optimize?								Yes		Yes		
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	None	None						C-Max		None	C-Max	
Walk Time (s)	7.0	7.0						7.0			7.0	
Flash Don't Walk (s)	11.0	11.0						11.0			11.0	
Pedestrian Calls (#/hr)	0	0						0			0	
Act Effct Green (s)		20.3						47.7		70.7	70.7	
Actuated g/C Ratio		0.20						0.48		0.71	0.71	
v/c Ratio		0.89						0.88		0.87	0.47	
Control Delay (s/veh)		54.9						36.3		26.1	1.5	
Queue Delay		0.0						0.0		4.2	0.5	
Total Delay (s/veh)		54.9						36.3		30.3	1.9	
LOS		D						D		C	A	
Approach Delay (s/veh)		54.9						36.3			13.0	
Approach LOS		D						D			B	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 39 (39%), Referenced to phase 2:NBT and 6:SBTL, Start of Green			
Natural Cycle: 90			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.89			
Intersection Signal Delay (s/veh): 31.4		Intersection LOS: C	
Intersection Capacity Utilization 85.2%		ICU Level of Service E	
Analysis Period (min) 15			

Splits and Phases: 2: NE Main Street (SC 417) & Curtis Street

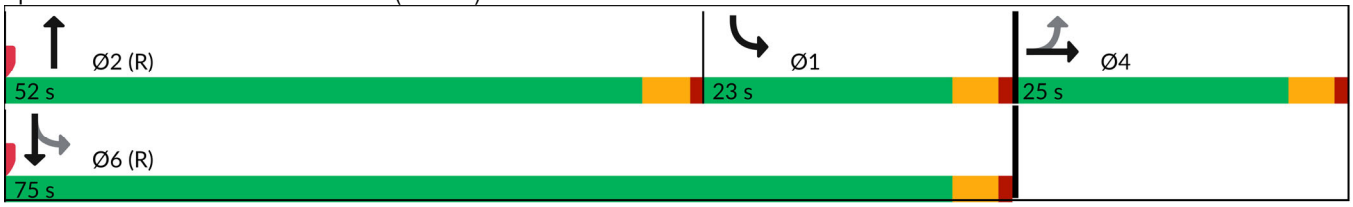



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	0	0	150	584	30	0
Future Volume (vph)	0	0	150	584	30	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	0.95	0.95	1.00	1.00
Frt						
Flt Protected				0.990	0.950	
Satd. Flow (prot)	0	0	0	3504	1770	0
Flt Permitted				0.990	0.950	
Satd. Flow (perm)	0	0	0	3504	1770	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	100			1158	256	
Travel Time (s)	2.7			31.6	7.0	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	167	649	33	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	816	33	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 30.5%		ICU Level of Service A	
Analysis Period (min) 15			


Intersection	
Int Delay, s/veh	0.6

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	0	0	150	584	30	0
Future Vol, veh/h	0	0	150	584	30	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	167	649	33	0

Major/Minor	Major2		Minor1	
Conflicting Flow All	0	0	659	-
Stage 1	-	-	0	-
Stage 2	-	-	659	-
Critical Hdwy	4.14	-	6.84	-
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	5.84	-
Follow-up Hdwy	2.22	-	3.52	-
Pot Cap-1 Maneuver	-	-	397	0
Stage 1	-	-	-	0
Stage 2	-	-	476	0
Platoon blocked, %		-		
Mov Cap-1 Maneuver	-	-	397	-
Mov Cap-2 Maneuver	-	-	397	-
Stage 1	-	-	-	-
Stage 2	-	-	476	-

Approach	WB	NB
HCM Ctrl Dly, s/v		14.9
HCM LOS		B

Minor Lane/Major Mvmt	NBLn1	WBL	WBT
Capacity (veh/h)	397	-	-
HCM Lane V/C Ratio	0.084	-	-
HCM Ctrl Dly (s/v)	14.9	-	-
HCM Lane LOS	B	-	-
HCM 95th %tile Q (veh)	0.3	-	-




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	67	926	153	0	0	0	0	36	281	130	16	0
Future Volume (vph)	67	926	153	0	0	0	0	36	281	130	16	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.980						0.880				
Flt Protected		0.997									0.957	
Satd. Flow (prot)	0	3458	0	0	0	0	0	1639	0	0	1783	0
Flt Permitted		0.997									0.957	
Satd. Flow (perm)	0	3458	0	0	0	0	0	1639	0	0	1783	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		22						150				
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		379			1213			1024			312	
Travel Time (s)		10.3			33.1			27.9			8.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	74	1029	170	0	0	0	0	40	312	144	18	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	1273	0	0	0	0	0	352	0	0	162	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						1		1	1	
Detector Template	Left	Thru								Left		
Leading Detector (ft)	20	100						30		20	30	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						30		20	30	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94										
Detector 2 Size(ft)		6										
Detector 2 Type		Cl+Ex										
Detector 2 Channel												
Detector 2 Extend (s)		0.0										
Turn Type	Perm	NA						NA		Split	NA	
Protected Phases		2						4		8	8	
Permitted Phases	2											
Detector Phase	2	2						4		8	8	
Switch Phase												
Minimum Initial (s)	7.0	7.0						7.0		7.0	7.0	

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Split (s)	22.5	22.5						22.5		22.5	22.5	
Total Split (s)	49.2	49.2						28.0		22.8	22.8	
Total Split (%)	49.2%	49.2%						28.0%		22.8%	22.8%	
Maximum Green (s)	44.7	44.7						23.5		18.3	18.3	
Yellow Time (s)	3.5	3.5						3.5		3.5	3.5	
All-Red Time (s)	1.0	1.0						1.0		1.0	1.0	
Lost Time Adjust (s)		0.0						0.0			0.0	
Total Lost Time (s)		4.5						4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	C-Max	C-Max						None		None	None	
Walk Time (s)	7.0	7.0						7.0		7.0	7.0	
Flash Don't Walk (s)	11.0	11.0						11.0		11.0	11.0	
Pedestrian Calls (#/hr)	0	0						0		0	0	
Act Effct Green (s)		54.7						17.8			14.0	
Actuated g/C Ratio		0.55						0.18			0.14	
v/c Ratio		0.67						0.85			0.65	
Control Delay (s/veh)		10.6						41.1			52.4	
Queue Delay		0.7						0.0			0.0	
Total Delay (s/veh)		11.2						41.1			52.4	
LOS		B						D			D	
Approach Delay (s/veh)		11.2						41.1			52.4	
Approach LOS		B						D			D	

Intersection Summary			
Area Type:	Other		
Cycle Length: 100			
Actuated Cycle Length: 100			
Offset: 0 (0%), Referenced to phase 2:EBTL, Start of Green			
Natural Cycle: 80			
Control Type: Actuated-Coordinated			
Maximum v/c Ratio: 0.85			
Intersection Signal Delay (s/veh): 20.8		Intersection LOS: C	
Intersection Capacity Utilization 71.0%		ICU Level of Service C	
Analysis Period (min) 15			

Splits and Phases: 4: Hedge Street & Curtis Street



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	59	457	4	45	3	0	0	15	30
Future Volume (vph)	0	0	0	59	457	4	45	3	0	0	15	30
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.999						0.911	
Flt Protected					0.994			0.955				
Satd. Flow (prot)	0	0	0	0	3514	0	0	1779	0	0	1697	0
Flt Permitted					0.994			0.955				
Satd. Flow (perm)	0	0	0	0	3514	0	0	1779	0	0	1697	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1082			82			565			1260	
Travel Time (s)		29.5			2.2			15.4			34.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	0	66	508	4	50	3	0	0	17	33
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	578	0	0	53	0	0	50	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 30.5%		ICU Level of Service A	
Analysis Period (min) 15			


Intersection	
Int Delay, s/veh	1.9

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	0	59	457	4	45	3	0	0	15	30
Future Vol, veh/h	0	0	0	59	457	4	45	3	0	0	15	30
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	66	508	4	50	3	0	0	17	33

Major/Minor	Major2			Minor1			Minor2			
Conflicting Flow All	0	0	0	395	644	-	-	642	256	
Stage 1	-	-	-	0	0	-	-	642	-	
Stage 2	-	-	-	395	644	-	-	0	-	
Critical Hdwy	4.14	-	-	7.54	6.54	-	-	6.54	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	-	5.54	-	
Critical Hdwy Stg 2	-	-	-	6.54	5.54	-	-	-	-	
Follow-up Hdwy	2.22	-	-	3.52	4.02	-	-	4.02	3.32	
Pot Cap-1 Maneuver	-	-	-	539	390	0	0	391	743	
Stage 1	-	-	-	-	-	0	0	467	-	
Stage 2	-	-	-	602	466	0	0	-	-	
Platoon blocked, %		-	-							
Mov Cap-1 Maneuver	-	-	-	498	390	-	-	391	743	
Mov Cap-2 Maneuver	-	-	-	498	390	-	-	391	-	
Stage 1	-	-	-	-	-	-	-	467	-	
Stage 2	-	-	-	554	466	-	-	-	-	

Approach	WB	NB	SB
HCM Ctrl Dly, s/v		13.2	11.9
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	490	-	-	-	572
HCM Lane V/C Ratio	0.109	-	-	-	0.087
HCM Ctrl Dly (s/v)	13.2	-	-	-	11.9
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.4	-	-	-	0.3



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	7	516	4	0	0	0	0	3	31	27	31	0
Future Volume (vph)	7	516	4	0	0	0	0	3	31	27	31	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999						0.876				
Flt Protected		0.999									0.977	
Satd. Flow (prot)	0	3532	0	0	0	0	0	1632	0	0	1820	0
Flt Permitted		0.999									0.977	
Satd. Flow (perm)	0	3532	0	0	0	0	0	1632	0	0	1820	0
Link Speed (mph)		25			25			25			25	
Link Distance (ft)		1197			85			1027			565	
Travel Time (s)		32.6			2.3			28.0			15.4	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	8	573	4	0	0	0	0	3	34	30	34	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	585	0	0	0	0	0	37	0	0	64	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 31.1%		ICU Level of Service A	
Analysis Period (min) 15			


Intersection	
Int Delay, s/veh	1.9

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	7	516	4	0	0	0	0	3	31	27	31	0
Future Vol, veh/h	7	516	4	0	0	0	0	3	31	27	31	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	8	573	4	0	0	0	0	3	34	30	34	0

Major/Minor	Major1			Minor1			Minor2		
Conflicting Flow All	0	0	0	-	591	289	304	593	-
Stage 1	-	-	-	-	591	-	0	0	-
Stage 2	-	-	-	-	0	-	304	593	-
Critical Hdwy	4.14	-	-	-	6.54	6.94	7.54	6.54	-
Critical Hdwy Stg 1	-	-	-	-	5.54	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-
Follow-up Hdwy	2.22	-	-	-	4.02	3.32	3.52	4.02	-
Pot Cap-1 Maneuver	-	-	-	0	418	708	625	417	0
Stage 1	-	-	-	0	493	-	-	-	0
Stage 2	-	-	-	0	-	-	681	492	0
Platoon blocked, %		-	-						
Mov Cap-1 Maneuver	-	-	-	-	418	708	591	417	-
Mov Cap-2 Maneuver	-	-	-	-	418	-	591	417	-
Stage 1	-	-	-	-	493	-	-	-	-
Stage 2	-	-	-	-	-	-	643	492	-

Approach	EB	NB	SB
HCM Ctrl Dly, s/v		10.7	13.6
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	SBLn1
Capacity (veh/h)	667	-	-	-	483
HCM Lane V/C Ratio	0.057	-	-	-	0.133
HCM Ctrl Dly (s/v)	10.7	-	-	-	13.6
HCM Lane LOS	B	-	-	-	B
HCM 95th %tile Q (veh)	0.2	-	-	-	0.5



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	9	22	57	46	138	12
Future Volume (vph)	9	22	57	46	138	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.905				0.989	
Flt Protected	0.986			0.973		
Satd. Flow (prot)	1662	0	0	1812	1842	0
Flt Permitted	0.986			0.973		
Satd. Flow (perm)	1662	0	0	1812	1842	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	1169			312	256	
Travel Time (s)	31.9			8.5	7.0	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	10	24	63	51	153	13
Shared Lane Traffic (%)						
Lane Group Flow (vph)	34	0	0	114	166	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 26.9%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	2.6

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	9	22	57	46	138	12
Future Vol, veh/h	9	22	57	46	138	12
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	10	24	63	51	153	13

Major/Minor	Minor2		Major1		Major2	
Conflicting Flow All	337	160	166	0	-	0
Stage 1	160	-	-	-	-	-
Stage 2	177	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	658	885	1412	-	-	-
Stage 1	869	-	-	-	-	-
Stage 2	854	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	628	885	1412	-	-	-
Mov Cap-2 Maneuver	628	-	-	-	-	-
Stage 1	829	-	-	-	-	-
Stage 2	854	-	-	-	-	-

Approach	EB	NB	SB
HCM Ctrl Dly, s/v	9.8	4.2	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1412	-	791	-	-
HCM Lane V/C Ratio	0.045	-	0.044	-	-
HCM Ctrl Dly (s/v)	7.7	0	9.8	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q (veh)	0.1	-	0.1	-	-



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	0	0	8	606	31	0
Future Volume (vph)	0	0	8	606	31	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	0.95	0.95	1.00	1.00
Frt						
Flt Protected				0.999	0.950	
Satd. Flow (prot)	0	0	0	3536	1770	0
Flt Permitted				0.999	0.950	
Satd. Flow (perm)	0	0	0	3536	1770	0
Link Speed (mph)	25			25	25	
Link Distance (ft)	313			100	1023	
Travel Time (s)	8.5			2.7	27.9	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Adj. Flow (vph)	0	0	9	673	34	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	0	0	682	34	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)		9	15		15	9
Sign Control	Free			Free	Stop	

Intersection Summary			
Area Type:	Other		
Control Type: Unsignalized			
Intersection Capacity Utilization 27.0%		ICU Level of Service A	
Analysis Period (min) 15			

Intersection	
Int Delay, s/veh	0.5

Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	0	0	8	606	31	0
Future Vol, veh/h	0	0	8	606	31	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	0	0	9	673	34	0

Major/Minor	Major2		Minor1	
Conflicting Flow All	0	0	355	-
Stage 1	-	-	0	-
Stage 2	-	-	355	-
Critical Hdwy	4.14	-	6.84	-
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	5.84	-
Follow-up Hdwy	2.22	-	3.52	-
Pot Cap-1 Maneuver	-	-	617	0
Stage 1	-	-	-	0
Stage 2	-	-	681	0
Platoon blocked, %		-		
Mov Cap-1 Maneuver	-	-	617	-
Mov Cap-2 Maneuver	-	-	617	-
Stage 1	-	-	-	-
Stage 2	-	-	681	-

Approach	WB	NB
HCM Ctrl Dly, s/v		11.2
HCM LOS		B

Minor Lane/Major Mvmt	NBLn1	WBL	WBT
Capacity (veh/h)	617	-	-
HCM Lane V/C Ratio	0.056	-	-
HCM Ctrl Dly (s/v)	11.2	-	-
HCM Lane LOS	B	-	-
HCM 95th %tile Q (veh)	0.2	-	-

APPENDIX D

SIMTRAFFIC ANALYSIS REPORTS

Intersection: 1: NE Main Street (SC 417) & College Street

Movement	EB	WB	NB	NB	SB	SB
Directions Served	LTR	LTR	L	TR	L	TR
Maximum Queue (ft)	61	360	31	317	150	329
Average Queue (ft)	31	312	3	132	36	165
95th Queue (ft)	45	419	16	258	91	283
Link Distance (ft)	16	341		507		1225
Upstream Blk Time (%)	48	26				
Queuing Penalty (veh)	83	120				
Storage Bay Dist (ft)			125		125	
Storage Blk Time (%)				10		14
Queuing Penalty (veh)				1		8

Intersection: 2: NE Main Street (SC 417) & Curtis Street

Movement	EB	WB	NB	NB	SB	SB
Directions Served	LTR	LTR	L	TR	L	TR
Maximum Queue (ft)	62	334	67	327	115	175
Average Queue (ft)	31	282	15	158	46	64
95th Queue (ft)	45	392	55	279	90	134
Link Distance (ft)	13	309		1047		507
Upstream Blk Time (%)	54	13				
Queuing Penalty (veh)	124	53				
Storage Bay Dist (ft)			150		150	
Storage Blk Time (%)				9	0	1
Queuing Penalty (veh)				2	0	1

Intersection: 3: Hedge Street & College Street

Movement	EB	WB	NB
Directions Served	TR	LT	LR
Maximum Queue (ft)	15	555	292
Average Queue (ft)	1	245	140
95th Queue (ft)	9	681	412
Link Distance (ft)	341	1137	508
Upstream Blk Time (%)		2	4
Queuing Penalty (veh)		0	3
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 4: Hedge Street & Curtis Street

Movement	EB	WB	NB	SB
Directions Served	LTR	LTR	LTR	LTR
Maximum Queue (ft)	194	872	352	225
Average Queue (ft)	89	421	139	114
95th Queue (ft)	167	1018	308	198
Link Distance (ft)	309	1185	990	508
Upstream Blk Time (%)	1	6		
Queuing Penalty (veh)	2	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 5: Main Street & College Street

Movement	EB	WB	NB	SB
Directions Served	LTR	LTR	LTR	LTR
Maximum Queue (ft)	209	26	36	57
Average Queue (ft)	83	2	8	18
95th Queue (ft)	177	13	29	65
Link Distance (ft)	1053	16	506	1230
Upstream Blk Time (%)		0		
Queuing Penalty (veh)		0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 6: Main Street & Curtis Street

Movement	EB	WB	NB	SB
Directions Served	LTR	LTR	LTR	LTR
Maximum Queue (ft)	326	30	138	81
Average Queue (ft)	138	2	44	21
95th Queue (ft)	296	15	135	85
Link Distance (ft)	1159	13	988	506
Upstream Blk Time (%)		0		
Queuing Penalty (veh)		0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Network Summary

Network wide Queuing Penalty: 398

Intersection: 1: NE Main Street (SC 417) & College Street

Movement	EB	WB	NB	NB	SB	SB
Directions Served	LTR	LTR	L	TR	L	TR
Maximum Queue (ft)	67	355	43	208	224	783
Average Queue (ft)	32	238	7	85	59	265
95th Queue (ft)	48	382	29	165	146	766
Link Distance (ft)	16	341		507		1225
Upstream Blk Time (%)	70	13				8
Queuing Penalty (veh)	166	36				0
Storage Bay Dist (ft)			125		125	
Storage Blk Time (%)				3	0	21
Queuing Penalty (veh)				0	2	25

Intersection: 2: NE Main Street (SC 417) & Curtis Street

Movement	EB	WB	NB	NB	SB	SB
Directions Served	LTR	LTR	L	TR	L	TR
Maximum Queue (ft)	46	334	154	375	184	202
Average Queue (ft)	30	299	30	183	75	81
95th Queue (ft)	39	381	109	321	150	167
Link Distance (ft)	13	309		1047		507
Upstream Blk Time (%)	72	39				
Queuing Penalty (veh)	207	111				
Storage Bay Dist (ft)			150		150	
Storage Blk Time (%)				12	1	1
Queuing Penalty (veh)				5	7	2

Intersection: 3: Hedge Street & College Street

Movement	EB	WB	NB
Directions Served	TR	LT	LR
Maximum Queue (ft)	15	529	139
Average Queue (ft)	1	93	35
95th Queue (ft)	7	476	91
Link Distance (ft)	341	1137	508
Upstream Blk Time (%)		3	
Queuing Penalty (veh)		0	
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 4: Hedge Street & Curtis Street

Movement	EB	WB	NB	SB
Directions Served	LTR	LTR	LTR	LTR
Maximum Queue (ft)	272	810	440	258
Average Queue (ft)	130	423	183	117
95th Queue (ft)	232	903	418	214
Link Distance (ft)	309	1185	990	508
Upstream Blk Time (%)	0	2		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 5: Main Street & College Street

Movement	EB	WB	NB	SB
Directions Served	LTR	LTR	LTR	LTR
Maximum Queue (ft)	792	31	161	783
Average Queue (ft)	512	5	67	423
95th Queue (ft)	961	21	175	835
Link Distance (ft)	1053	16	506	1230
Upstream Blk Time (%)	5	11		
Queuing Penalty (veh)	0	22		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 6: Main Street & Curtis Street

Movement	EB	WB	NB	SB
Directions Served	LTR	LTR	LTR	LTR
Maximum Queue (ft)	1193	30	694	488
Average Queue (ft)	949	4	358	332
95th Queue (ft)	1424	21	702	554
Link Distance (ft)	1159	13	988	506
Upstream Blk Time (%)	44	0	0	13
Queuing Penalty (veh)	0	1	0	2
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Network Summary

Network wide Queuing Penalty: 587

Intersection: 1: NE Main Street (SC 417) & College Street

Movement	WB	WB	NB	NB	SB
Directions Served	LT	TR	L	T	TR
Maximum Queue (ft)	372	380	67	219	390
Average Queue (ft)	335	343	20	83	212
95th Queue (ft)	412	406	53	175	336
Link Distance (ft)	342	342		532	1213
Upstream Blk Time (%)	37	43			
Queuing Penalty (veh)	167	194			
Storage Bay Dist (ft)			150		
Storage Blk Time (%)				1	
Queuing Penalty (veh)				0	

Intersection: 2: NE Main Street (SC 417) & Curtis Street

Movement	EB	EB	NB	SB	SB
Directions Served	LT	TR	TR	L	T
Maximum Queue (ft)	38	46	259	123	99
Average Queue (ft)	24	29	89	48	29
95th Queue (ft)	31	38	192	91	77
Link Distance (ft)	10	10	1035		532
Upstream Blk Time (%)	82	81			
Queuing Penalty (veh)	174	172			
Storage Bay Dist (ft)				225	
Storage Blk Time (%)					
Queuing Penalty (veh)					

Intersection: 3: Hedge Street & College Street

Movement	WB	WB	NB
Directions Served	LT	T	L
Maximum Queue (ft)	854	834	167
Average Queue (ft)	447	440	51
95th Queue (ft)	1042	1022	172
Link Distance (ft)	1136	1136	531
Upstream Blk Time (%)	8	9	
Queuing Penalty (veh)	0	0	
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 4: Hedge Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	100	105	216	322
Average Queue (ft)	34	42	88	144
95th Queue (ft)	75	88	171	265
Link Distance (ft)	307	307	978	531
Upstream Blk Time (%)				
Queuing Penalty (veh)				
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 5: Main Street & College Street

Movement	WB	WB	NB	SB
Directions Served	LT	TR	LT	TR
Maximum Queue (ft)	7	8	56	40
Average Queue (ft)	0	0	21	17
95th Queue (ft)	5	5	49	44
Link Distance (ft)	17	17	530	1219
Upstream Blk Time (%)		0		
Queuing Penalty (veh)		0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 6: Main Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	1186	1190	658	205
Average Queue (ft)	947	936	338	86
95th Queue (ft)	1423	1424	661	255
Link Distance (ft)	1155	1155	976	530
Upstream Blk Time (%)	50	49		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Network Summary

Network wide Queuing Penalty: 709

Intersection: 1: NE Main Street (SC 417) & College Street

Movement	WB	WB	NB	NB	SB
Directions Served	LT	TR	L	T	TR
Maximum Queue (ft)	364	370	223	480	1245
Average Queue (ft)	334	256	116	200	782
95th Queue (ft)	407	489	267	545	1573
Link Distance (ft)	342	342		532	1213
Upstream Blk Time (%)	74	39		21	47
Queuing Penalty (veh)	222	115		106	0
Storage Bay Dist (ft)			150		
Storage Blk Time (%)			40	5	
Queuing Penalty (veh)			201	3	

Intersection: 2: NE Main Street (SC 417) & Curtis Street

Movement	EB	EB	NB	SB	SB
Directions Served	LT	TR	TR	L	T
Maximum Queue (ft)	32	53	906	229	118
Average Queue (ft)	22	29	403	59	20
95th Queue (ft)	31	39	1060	171	76
Link Distance (ft)	10	10	1035		532
Upstream Blk Time (%)	84	79	22		
Queuing Penalty (veh)	235	222	0		
Storage Bay Dist (ft)				225	
Storage Blk Time (%)				0	0
Queuing Penalty (veh)				2	0

Intersection: 3: Hedge Street & College Street

Movement	WB	WB	NB
Directions Served	LT	T	L
Maximum Queue (ft)	1158	1164	183
Average Queue (ft)	765	757	58
95th Queue (ft)	1539	1540	167
Link Distance (ft)	1136	1136	531
Upstream Blk Time (%)	53	52	
Queuing Penalty (veh)	0	0	
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 4: Hedge Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	153	156	293	173
Average Queue (ft)	42	53	118	44
95th Queue (ft)	114	132	216	133
Link Distance (ft)	307	307	978	531
Upstream Blk Time (%)				
Queuing Penalty (veh)				
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 5: Main Street & College Street

Movement	WB	WB	NB	SB
Directions Served	LT	TR	LT	TR
Maximum Queue (ft)	34	9	53	507
Average Queue (ft)	14	0	23	190
95th Queue (ft)	33	5	49	550
Link Distance (ft)	17	17	530	1219
Upstream Blk Time (%)	61	0		
Queuing Penalty (veh)	156	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 6: Main Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	1193	1195	778	536
Average Queue (ft)	1090	1083	476	462
95th Queue (ft)	1381	1386	821	665
Link Distance (ft)	1155	1155	976	530
Upstream Blk Time (%)	76	75	0	65
Queuing Penalty (veh)	0	0	0	48
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Network Summary

Network wide Queuing Penalty: 1310

Intersection: 1: NE Main Street (SC 417) & College Street

Movement	WB	WB	NB	NB	SB
Directions Served	LT	TR	L	T	TR
Maximum Queue (ft)	265	269	93	213	383
Average Queue (ft)	225	230	22	75	201
95th Queue (ft)	331	339	62	167	361
Link Distance (ft)	244	244		532	1213
Upstream Blk Time (%)	32	39			
Queuing Penalty (veh)	153	183			
Storage Bay Dist (ft)			150		
Storage Blk Time (%)				1	
Queuing Penalty (veh)				0	

Intersection: 2: NE Main Street (SC 417) & Curtis Street

Movement	EB	EB	NB	SB	SB
Directions Served	LT	TR	TR	L	T
Maximum Queue (ft)	38	47	235	103	102
Average Queue (ft)	24	29	80	44	28
95th Queue (ft)	33	37	171	81	79
Link Distance (ft)	10	10	1035		532
Upstream Blk Time (%)	83	82			
Queuing Penalty (veh)	178	176			
Storage Bay Dist (ft)				225	
Storage Blk Time (%)					
Queuing Penalty (veh)					

Intersection: 3: Hedge Street & College Street

Movement	WB	WB	NB
Directions Served	LT	T	L
Maximum Queue (ft)	1127	1122	197
Average Queue (ft)	800	797	121
95th Queue (ft)	1479	1468	249
Link Distance (ft)	1136	1136	203
Upstream Blk Time (%)	41	42	37
Queuing Penalty (veh)	0	0	15
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 4: Hedge Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	112	121	513	260
Average Queue (ft)	38	45	156	123
95th Queue (ft)	95	98	501	234
Link Distance (ft)	307	307	978	273
Upstream Blk Time (%)			3	1
Queuing Penalty (veh)			0	1
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 5: Main Street & College Street

Movement	WB	WB	NB	SB
Directions Served	LT	TR	LT	TR
Maximum Queue (ft)	9	3	61	43
Average Queue (ft)	0	0	18	17
95th Queue (ft)	5	0	47	44
Link Distance (ft)	17	17	530	1219
Upstream Blk Time (%)	0	0		
Queuing Penalty (veh)	0	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 6: Main Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	1185	1195	722	140
Average Queue (ft)	1009	998	388	55
95th Queue (ft)	1433	1434	733	189
Link Distance (ft)	1155	1155	976	530
Upstream Blk Time (%)	59	58	0	
Queuing Penalty (veh)	0	0	0	
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 11: Hedge Street & Access A

Movement	EB	NB	SB
Directions Served	LR	LT	TR
Maximum Queue (ft)	160	188	26
Average Queue (ft)	44	71	1
95th Queue (ft)	148	238	23
Link Distance (ft)	1140	273	203
Upstream Blk Time (%)		13	0
Queuing Penalty (veh)		7	0
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 18: Access B & College Street

Movement	WB	WB	NB
Directions Served	LT	T	L
Maximum Queue (ft)	60	69	98
Average Queue (ft)	42	48	30
95th Queue (ft)	77	75	88
Link Distance (ft)	41	41	1004
Upstream Blk Time (%)	28	37	
Queuing Penalty (veh)	131	172	
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Network Summary

Network wide Queuing Penalty: 1015

Intersection: 1: NE Main Street (SC 417) & College Street

Movement	WB	WB	NB	NB	SB
Directions Served	LT	TR	L	T	TR
Maximum Queue (ft)	253	273	223	538	1235
Average Queue (ft)	245	171	121	239	886
95th Queue (ft)	252	358	272	618	1594
Link Distance (ft)	243	243		532	1213
Upstream Blk Time (%)	86	42		33	57
Queuing Penalty (veh)	274	135		167	0
Storage Bay Dist (ft)			150		
Storage Blk Time (%)			44	9	
Queuing Penalty (veh)			221	5	

Intersection: 2: NE Main Street (SC 417) & Curtis Street

Movement	EB	EB	NB	SB	SB
Directions Served	LT	TR	TR	L	T
Maximum Queue (ft)	33	42	1050	237	161
Average Queue (ft)	21	25	439	50	16
95th Queue (ft)	32	43	1121	165	91
Link Distance (ft)	10	10	1035		532
Upstream Blk Time (%)	88	68	28		0
Queuing Penalty (veh)	251	194	0		0
Storage Bay Dist (ft)				225	
Storage Blk Time (%)				0	0
Queuing Penalty (veh)				2	1

Intersection: 3: Hedge Street & College Street

Movement	WB	WB	NB
Directions Served	LT	T	L
Maximum Queue (ft)	1160	1159	198
Average Queue (ft)	812	797	102
95th Queue (ft)	1499	1507	226
Link Distance (ft)	1136	1136	203
Upstream Blk Time (%)	56	55	25
Queuing Penalty (veh)	0	0	14
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Intersection: 4: Hedge Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	177	186	365	185
Average Queue (ft)	52	60	153	48
95th Queue (ft)	137	153	377	131
Link Distance (ft)	307	307	978	273
Upstream Blk Time (%)			2	0
Queuing Penalty (veh)			0	0
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 5: Main Street & College Street

Movement	WB	WB	NB	SB
Directions Served	LT	TR	LT	TR
Maximum Queue (ft)	36	3	60	613
Average Queue (ft)	16	0	23	231
95th Queue (ft)	37	3	50	620
Link Distance (ft)	17	17	530	1219
Upstream Blk Time (%)	68	0		
Queuing Penalty (veh)	177	0		
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 6: Main Street & Curtis Street

Movement	EB	EB	NB	SB
Directions Served	LT	TR	TR	LT
Maximum Queue (ft)	1186	1188	790	538
Average Queue (ft)	1107	1101	465	472
95th Queue (ft)	1345	1351	837	655
Link Distance (ft)	1155	1155	976	530
Upstream Blk Time (%)	80	78		71
Queuing Penalty (veh)	0	0		52
Storage Bay Dist (ft)				
Storage Blk Time (%)				
Queuing Penalty (veh)				

Intersection: 11: Hedge Street & Access A

Movement	EB	NB
Directions Served	LR	LT
Maximum Queue (ft)	91	179
Average Queue (ft)	26	36
95th Queue (ft)	75	159
Link Distance (ft)	1140	273
Upstream Blk Time (%)		4
Queuing Penalty (veh)		4
Storage Bay Dist (ft)		
Storage Blk Time (%)		
Queuing Penalty (veh)		

Intersection: 18: Access B & College Street


Movement	WB	WB	NB
Directions Served	LT	T	L
Maximum Queue (ft)	60	66	506
Average Queue (ft)	47	33	214
95th Queue (ft)	59	76	516
Link Distance (ft)	42	42	1003
Upstream Blk Time (%)	85	42	
Queuing Penalty (veh)	260	128	
Storage Bay Dist (ft)			
Storage Blk Time (%)			
Queuing Penalty (veh)			

Network Summary

Network wide Queuing Penalty: 1886

APPENDIX E

BACKGROUND IMPROVEMENTS

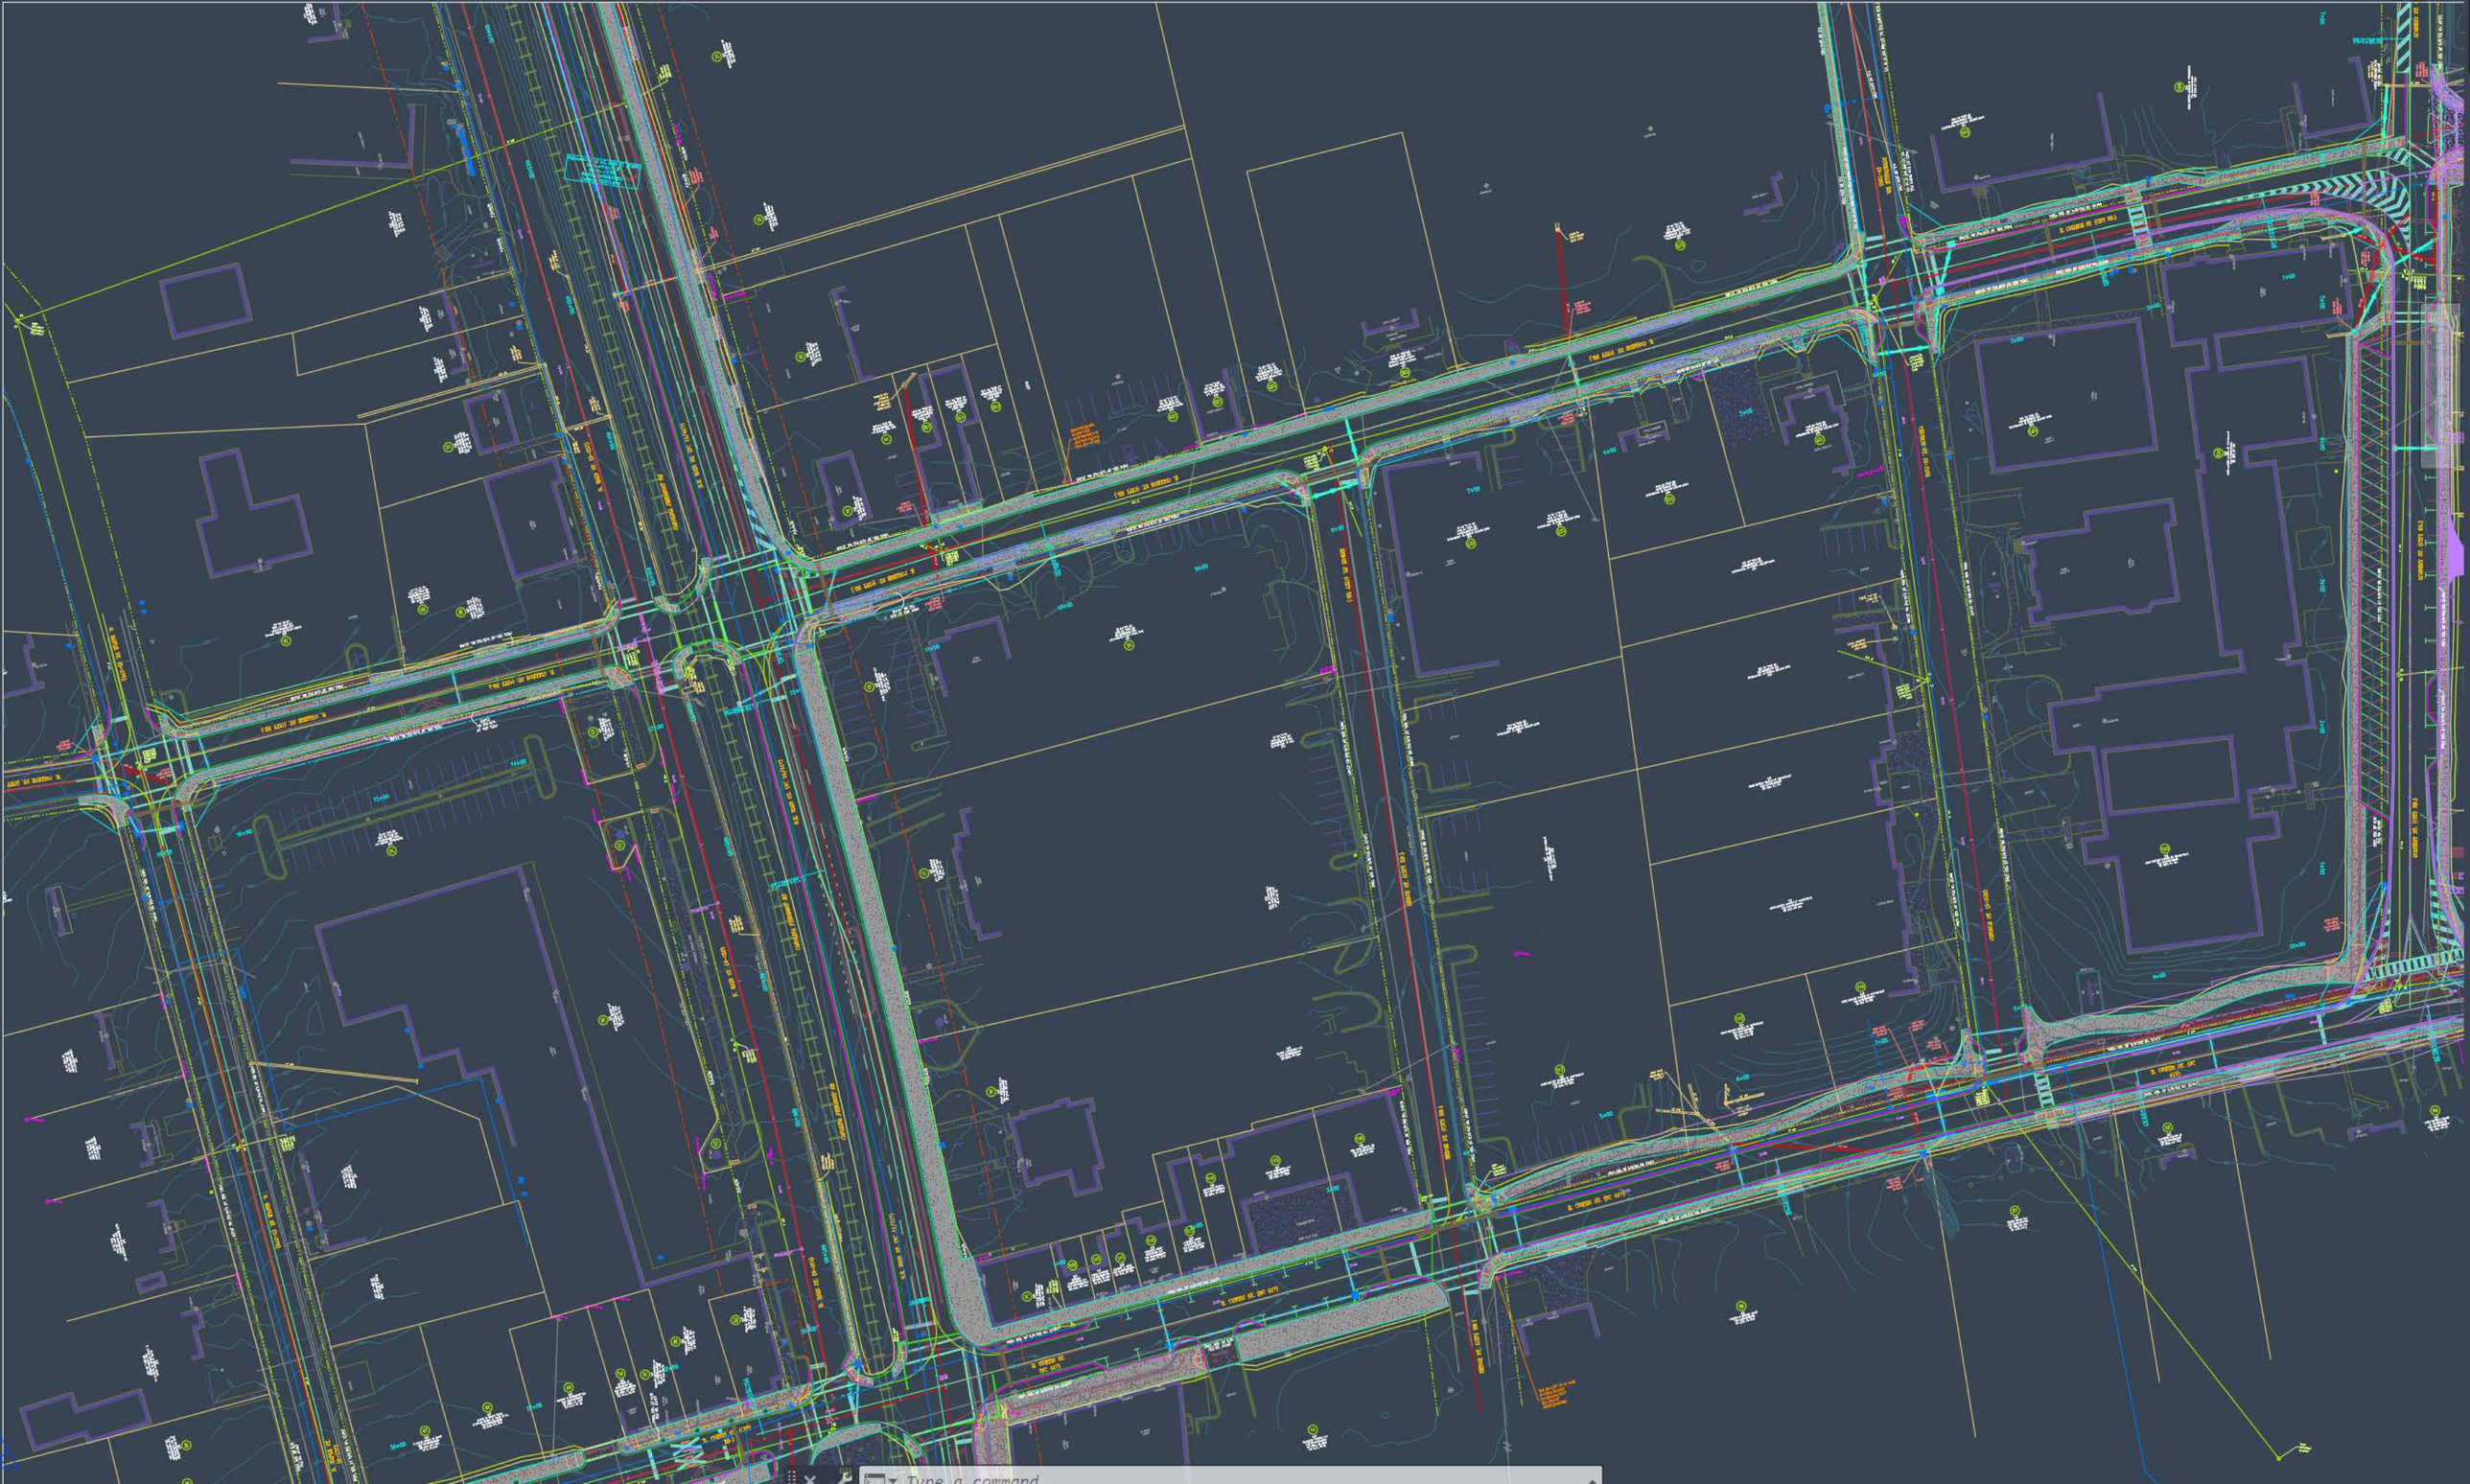
E. COLFAX AVE. (HWY 40)
N. MAIN ST. (HWY 83)
S. MAIN ST. (HWY 83)
E. COLFAX AVE. (HWY 40)
N. MAIN ST. (HWY 83)
E. COLFAX AVE. (HWY 40)
E. COLFAX AVE. (HWY 40)
E. COLFAX AVE. (HWY 40

DEVELOPMENT AGREEMENT FOR BURDETTE NORTH DISTRICT REDEVLOPMENT PROJECT

THIS DEVELOPMENT AGREEMENT FOR BURDETTE NORTH DISTRICT REDEVELOPMENT PROJECT (the "Agreement") is effective _____, 2025 ("Effective Date"), between **CITY OF SIMPSONVILLE**, **SOUTH CAROLINA**, a body corporate and politic (the "City") of the State of South Carolina, and **BLUE RIDGE LAND HOLDINGS, LLC,** a South Carolina limited liability company ("Developer"). City and Developer are each a "Party," and collectively, the "Parties."

RECITALS:

WHEREAS, the Parties entered into a Purchase and Sale Agreement effective as of August 20, 2021, as amended by (i) Amendment to Purchase and Sale Agreement dated April 25, 2023, (ii) Second Amendment to Purchase and Sale Agreement dated November 21, 2024, (iii) Third Amendment to Purchase and Sale Agreement dated December 31, 2024, and (iv) Fourth Amendment to Purchase and Sale Agreement dated April 22, 2025 (the "PSA") whereby the Developer will purchase certain property from the City identified on Exhibit A attached hereto and made a part hereof (the "City Property") from the City; and,

WHEREAS, Developer is the owner of that certain property adjacent to the City Property being more particularly described on Exhibit B attached hereto and made a part hereof (the "Former Bank Property", and together with the City Property, the "Developer Property"); and,

WHEREAS, the Parties intend to cooperate to redevelop parcels of land more particularly described herein in the City of Simpsonville to create a privately-owned mixed-use development as set forth below; and,

WHEREAS, the Parties intend for the Burdette North District Redevelopment (defined in Section 5A below) to (i) create capital investment and full-time employment in the City's municipal limits, (ii) maximize public benefit and minimize public investment, (iii) provide business-urban district housing, provide for additional public benefit, (iv) respect existing City fabric such as height limits, historic buildings, design aesthetics, etc., and (v) provide for establishment of integrated site plans, urban design elements, land uses, architecture, site engineering, and landscape architecture, all while respecting the Simpsonville Comprehensive Plan: 2040 as it relates to land use; and,

WHEREAS, in exchange for providing these benefits to the City, Developer desires to receive the assurance that it may proceed with the development of the Developer Property (defined below) in accordance with and subject to any and all existing City development regulations and conditions of approval of the City as they exist on the effective date of the Rezoning (defined in Section 2 below), subject to the terms, conditions, and exceptions contained herein and subject to periodic potential amendments to this Agreement made in accordance with this Agreement.

WHEREAS, Developer intends to develop the improvements set forth below on the Developer Property pursuant to a rezoning of the Developer Property to the Innovative Development District designation (*See* Section 2.11 of the City of Simpsonville Zoning Ordinance "Zoning Ordinance"), which requires, among other things, City approval of a concept plan and master site plan pursuant to the terms of Section 2.11, the terms and conditions of which are incorporated herein as if set forth fully.

NOW, THEREFORE, in consideration and mutual dependence on the factual representations

contained in this Agreement, the Recitals set forth hereinabove, each Party's expending funds to complete their respective portions of the Development, and in reliance on each Party's exchange of promises as contained in this Agreement, the Parties agree as follows:

1. **City's Approval of Agreement:** The terms and conditions of this Agreement have undergone extensive review by City Council (the "Council") and Council has determined this Agreement to be fair, just, reasonable, and in the best interests of the City. After careful review and deliberation, the Council has determined and concluded that the Agreement meets the goals and needs of the City and complies with all statutory requirements.

On _____, 2025, the Council considered and approved this Agreement by ordinance and authorized the City's execution of the same. The approval of this Agreement constitutes a legislative act of the Council.

2. Rezoning of Developer Property. In order for Developer to undertake the Project, City and Developer acknowledge the Developer Property must be rezoned from its current Business Urban zoning classification to the Innovative Development District (ID) zoning classification (the "Rezoning") as set forth under Section 2.11 of the City's zoning ordinance (the "Zoning Ordinance") in effect as of the Effective Date. The terms of Section 2.11 of the Zoning Ordinance are hereby incorporated into the terms of this Agreement. To effectuate such Rezoning, Developer agrees to submit appropriate and applicable documentation to request the Rezoning of the Property as soon as reasonably possible upon receipt of the fully effective Agreement. City agrees to use its reasonable best efforts to assist Developer in obtaining the Rezoning. This Agreement shall terminate automatically in the event the Rezoning of the Developer Property is not obtained. In the event Developer does not obtain the Rezoning of the Property, Developer shall have the right in its complete and sole discretion to either (i) terminate the PSA by delivery of written notice to City prior to the Closing Date set forth in the PSA, or (ii) waive such right and complete the acquisition of the City Property.

3. **Expansion of Developer Property.** Developer is attempting to acquire, lease or otherwise control some or all of the property currently owned by Secured Advantage Credit Union being more particularly described on Exhibit C attached hereto and made a part hereof (the "Credit Union Property"), to be utilized as part of the Project. In the event that Developer is able to accomplish the same, the portion of the Credit Union Property, Developer either acquires or leases shall become part of the Developer Property. The Parties shall thereafter amend this Agreement to include the Credit Union Property as part of the Developer Property.

4. SC Mill Tax Credits. Developer may elect to undertake appropriate actions with Greenville County in order to request and obtain a satisfactory resolution and a subsequent ordinance confirming that tax credits under the South Carolina Textiles Communities Revitalization Act, Section 12-67-140, et. seq., of the South Carolina Codes of Laws (the "Mill Tax Credits"), shall be applicable and available with respect to all or a portion of the Developer Property. City agrees to use its reasonable best efforts to assist Developer in obtaining the Mill Tax Credits.

5. Developer Commitments and Benefits.

A. Development on Developer Property. Developer shall acquire the City Property from the City subject to the terms of the PSA. Developer shall design, develop, construct, furnish, and do all other things necessary to redevelop, construct and operate on the Developer Property (i) up to one hundred twenty five (125) apartment units with related amenities for tenants of the apartments, (ii) up to 25,000 square feet of retail, restaurant or office space; and (iii) a surface parking lot with parking to accommodate the development with vehicular and pedestrian access to and from all improvements (collectively the "Project"

or "Burdette North District Redevelopment") in compliance with all requirements set forth in Section 4.5 of the Simpsonville Zoning Ordinance, the approved Concept Plan/Statement of Intent, and DO-TC 2.12, Design Overlay-Town Center District, as preliminarily illustrated in the drawing attached hereto as Exhibit D (the "Project Facilities") and as will be fully described on the Master Site Plan approved by Council as part of the Rezoning. The Project shall be constructed according to the Construction Schedule attached hereto as Exhibit E (the "Construction Schedule"), which may be adjusted based upon the Construction Commencement Date defined below. Developer shall use its reasonable best efforts to achieve substantial completion of the Project by June 30, 2028. For purposes of this Agreement, "substantial completion" means that the buildings and improvements for the Project Facilities are sufficiently complete so that it can be utilized for their intended use. Developer shall commence site demolition, grading, and construction after it acquires the City Property pursuant to the PSA and as soon as reasonably possible upon receipt of applicable permits and approvals after Developer acquires the City Property from the City ("Construction Commencement Date"). The Construction Commencement Date and the dates provided on the Construction Schedule are each a "Benchmark Date" and Developer's failure to comply with the same is enforceable against the Developer as set forth in Section 6(F) hereof.

B. Design Considerations. At a minimum, Developer shall design all improvements on the Developer Property in compliance with City's Building & Development Standards in the Zoning Ordinance, including Section 2.11 of the Zoning Ordinance, and must receive all required approvals by City's Department of Building & Development Standards prior to commencing each phase of construction. Developer shall submit the design of the buildings on the Developer Property to be approved by City Planning Staff subject to the plans approved by Council. . Developer shall design and construct the Project Facility on Developer's Property of a scale and using materials to be complementary of public improvements and to be compatible with existing downtown buildings and other downtown development.

C. Compliance with Building, Zoning, and Environmental Laws. Subject to the Rezoning necessary in order for Developer to develop the Project Facilities as described in this Agreement, including without limitation, waiver of setback lines and height restrictions for the Developer Property, Developer shall construct and develop the Project Facilities according to all applicable federal, state, and local laws, rules, orders, ordinances, regulations, and legal requirements of all governmental entities, agencies, or instrumentalities relating to the development, use, or condition of Developer Property, including, without limitation, all building code, zoning requirements, and environmental regulations then in effect at the latter of the time applicable permits are issued and a certificate of occupancy is issued. At the completion of each phase or component of the Project Facilities, Developer shall ensure the use and operation of each phase or component of the Project Facilities is according to all applicable federal, state, and local laws, as amended for the Project Facilities. Developer shall (i) ensure construction is performed in a manner that does not cause any damage to existing land, or improvements and (ii) at City's option, promptly repair any damage that may occur.

D. General Construction Requirements. The Developer is responsible for the following items during all construction phases:

a. Cleanliness to include entire worksite area (including, for example, dust control, garbage, construction debris, loose and blowing materials);

b. Damage to existing on-site utilities, including, for example, water, sewer, storm water, communication, electricity, and gas;

c. Parking for construction employees, material lay-down area, location for construction material dumpsters;

d. Coordination with existing businesses and residents regarding noise, displaced parkers, after-hours construction, concrete pours, blasting, disruption of vehicle and pedestrian access; and

E. Additional Developer Benefits. The general benefits to be received by Developer from the implementation of the Development, in addition to certain matters set forth above, include without limitation:

a. Realization of the opportunity to implement the Development plan for a mixed use development that is consistent with City's and the Developer's goals and needs;
b. Integration of site plans, urban design elements, land uses, architecture, site engineering, landscape architecture, and mitigation measures over the entire Project;
c. Security provided by certain City ordinances, standards, policies, and guidelines to achieve the Project;
d. Participation by the City to achieve the public benefits necessary for the Project; and
e. In exchange for providing the within benefits to the City, the Developer desires to receive the assurance that it may proceed with the Project in accordance with any and all existing City development regulations and conditions of approval of the City as they exist on the Effective Date, subject to the terms, conditions, and exceptions contained herein and subject to periodic potential amendments to this Agreement made in accordance with this Agreement.

6. City Commitments

A. Rezoning. The City acknowledges that a condition to Developer's obligations herein is that the Developer receive the Rezoning so that Developer can develop the Project Facilities as described in this Agreement.

B. Streetscape Improvements. City agrees to use its reasonable best efforts to complete the streetscape and other public improvements planned for the area contiguous and adjacent to the Developer Property which are set forth on Exhibit F attached hereto and made a part hereof (the "Streetscape Improvements") at its expense prior to Developer's completion of the Project.

C. Undergrounding Utilities. Prior to Developer's completion of construction of Project Facilities, City agrees to use its reasonable best efforts to either complete, or facilitate the completion with Duke Energy, of the undergrounding utilities along College Street and Main Street in front of the Developer Property at no expense to Developer.

D. Street Narrowing. City shall use it reasonable best efforts to cause the portion of Hedge Street that is contiguous to the Developer Property shown and depicted on the drawing attached hereto as Exhibit G to be narrowed to allow for additional parking on the Developer Property at no expense to Developer.

E. Permitting. To the extent permitted by law and for those items under City control, the City shall attempt to expedite the processing, approval, and permitting of drawings, plats, plans, applications, and other items for and pertaining to all phases of the Project.

F. Benchmark Dates. If Developer fails to accomplish any required task by that required task's applicable benchmark date, then, in addition to any other remedy provided under this Agreement, City may delay its performance of any obligation under this Agreement for a similar period.

7. Design and Construction Processes

A. Designated Contact. Immediately following this Agreement's execution, City and Developer shall each designate a senior-level contact to represent that Party (each a "Designated Contact"). Designated Contacts shall address, without delay, issues related to scheduling, traffic control, utility coordination, and a process for reviewing and revising plans and specifications. Each Party shall provide that Party's communications through that Party's Designated Contact.

B. Pre- and During Construction. Prior to preparing any plans or specifications, and through the construction process, the City and Developer shall confer on the needs, preferences, and expectations each Party has for its respective project and as much as possible achieve common goals as to how to achieve those goals. The process Parties outline in this subsection is in addition to and not in lieu of all approval and permitting processes applicable to all persons and entities developing projects in city limits.

8. Bonds and Insurance

A. Insurance. During construction, the Developer shall obtain and maintain, or cause to be obtained and maintained, at all times one or more policies of insurance containing the following types of coverage, deductibles, limits, and other terms acceptable to the City, in its sole discretion:

a. Builders Risk. Comprehensive builders' risk, casualty, and property insurance against any casualty on an "all risk" perils basis. This policy must include fire, extended coverage, vandalism, and malicious mischief.

b. General Liability. Commercial general liability insurance covering the defense and legal liability claims of bodily injury, death and property damage which occurs on, in or about or relating to the Developer Property regardless of the cause of the same. This policy must have not less than $3,000,000 combined single limits per occurrence/aggregate for bodily injury or property damage, provided by a Commercial General Liability policy or combination of General Liability and Umbrella Liability limits.

c. Workers Compensation. Workers Compensation and Occupational Disease insurance meeting the State's statutory requirements, including employer's liability in an amount not less than $1,000,000.

d. Motor Vehicle. Motor vehicle covering all owned, non-owned and hired automobiles of not less than $1,000,000 combined single-limits per each occurrence/aggregate for liability, bodily injury, and property damage.

e. Miscellaneous. Insurance this Agreement requires must be effected under standard form policies issued by insurers of recognized responsibility authorized to do business in South Carolina which are rated at least Class A/VIII, Best Rating Services. The policies must be non-assessable and shall contain language to the effect that (i) any loss shall be payable notwithstanding any act of negligence, (ii) the policies are primary and noncontributing with insurance on which additional insured's are listed as named insured's, and (iii) the insurer is not entitled to initiate cancellation, material limitation or non-renewal except after 30 days' written notice for cancellation due to non-payment of premium) by the insurer to the Developer and City. The policies must include waivers of all rights of subrogation against the Developer, City and their respective elected officials, officers, agents, and employees. The policy described in subparagraphs (a) , (b) , and (d) of this section must include the City and Developer, and their respective elected officials, officers, agents, employees, subcontractors, and licensees as additional insureds to the extent allowed by law. The policy described in subparagraphs (e) of this section must include the

Developer as an additional insured. Each policy must contain deductibles, retentions, or both, as City, in its sole discretion, deems appropriate.

9. Damage or Destruction Prior to Substantial Completion

If, at any time prior to substantial completion, the Project is damaged or destroyed by a fire or other casualty, the Developer shall commence, and proceed as promptly as possible, to repair and restore the Project Facilities so as to cause the same to achieve substantial completion according to approved architectural drawings as soon as practicable.

10. Cooperation

Parties shall work together to correct and conform deeds, assignments, or other conveyance instruments, to reflect as-built configurations. A Party may not unreasonably withhold consent.

11. Default / Remedies

A. Developer. Upon the default by the Developer in the due performance of or compliance with any of the terms hereof, City shall give Developer written notice of such default and thirty (30) days to cure such default; provided, however, that if the nature of Developer's obligation is such that more than thirty (30) days are required for its performance, and so long as Developer has provided written notice of the precise time frame for completion, then Developer shall not be deemed in default if it shall commence such performance within thirty (30) days and thereafter diligently pursues the same to completion, and if Developer shall fail to proceed promptly to cure the same, City may:

   a. terminate this Agreement immediately by delivery of written notice to Developer; and,

   b. take whatever action at law or in equity as may appear necessary or desirable to enforce its rights under this Agreement; and,

B. City. Upon the default of the City in the due performance of or compliance with any of the terms hereof, the Developer shall give the City written notice of such default and 30 days to cure such default; provided, however, that if the nature of City's obligation is such that more than thirty (30) days are required for its performance, and so long as City has provided written notice of the precise time frame for completion, then City shall not be deemed in default if it shall commence such performance within thirty (30) days and thereafter diligently pursues the same to completion and if the City shall fail to proceed promptly to cure the same, the Developer may take whatever action at law or in equity as may appear necessary or desirable to enforce its rights under this Agreement.

12. Developer Property Restriction.

In the event that Developer has both (i) acquired the City Property and (ii) entered into this Agreement with the City, Developer shall record a covenant against the Developer Property, to run with the Developer Property, that the Developer Property shall not, for a period of twenty (20) years, be transferred to, owned by, or used, by any person (legal or natural) that would result in the Developer Property, or any portion (legal or geographic), having a complete exemption from *ad valorem* property taxes without the written approval of the City; provided, however, such covenant shall not preclude or prevent Developer or a subsequent owner or user of the Developer Property, or any portion thereof, from applying for and receiving the benefit of an applicable property tax classification that would reduce, lower or otherwise benefit the *ad valorem* property taxes applicable to the Developer Property or any portion thereof (such as, for example, (i) a fee in lieu of taxes agreement with the City or (ii) ownership by a 501(C)(3) non-profit entity).

13. Entire Agreement

This Agreement is the entire agreement among Parties with respect to the subject matter of this Agreement. All prior documents, negotiations, and discussions merge in this Agreement and do not survive this Agreement's execution.

14. No Oral Modification/Waiver

Parties are not entitled to modify, in any way, this Agreement except by a writing signed by or on behalf of all Parties by a duly authorized representative of the executing Party. Neither any purported amendment, of any kind, to this Agreement, nor any purported waiver of any provision of this Agreement is valid unless all Parties have consented in writing.

15. Non-Assignment

A Party shall not assign its rights or delegate its responsibilities under this Agreement to any third party without the prior, written consent of all Parties; provided, however, the Parties recognizes that Developer shall be permitted to assign its interest in this Agreement to an entity created for the purpose of acquiring, owning and developing the Developer Property in which Developer or its principals own(s) an interest. Notwithstanding the foregoing, the City is entitled to assign some or all of its rights or delegate some or all of its duties under this Agreement to a nonprofit corporation to effect a means of financing the City's project costs. City is not required to obtain any further consent from any other Party beyond this Agreement's execution for that purpose.

16. Mutual Dependency of Commitments

Each Party's commitments under this Agreement are collectively dependent, each on the other, and are subject to the condition that each Party continues to move toward completion of that Party's projects on collectively acceptable terms and conditions of all documents contemplated by this Agreement.

17. No Third-Party Beneficiary/No Joint Venture

The Parties do not intend to create any third-party beneficiary rights, nor any form of partnership, joint venture, or any other legal relationship among the Parties, except a contractual relationship as set forth in this Agreement.

18. Force Majeure

Neither party shall be held responsible for delays in the performance of its obligations hereunder when caused by a Force Majeure event. In order for its performance to be excused for the period of a Force Majeure event, a party must give written notice to the other party within 10 days after the occurrence of the Force Majeure event. A Force Majeure event is any period of delay which arises from or through: Acts of God, including, without limitation, flood, earthquake, and severe weather conditions; strikes; explosion; sabotage; riot or civil commotion; act of war; fire or other casualty; legal requirements; or any other causes beyond the reasonable control of the party claiming delay from or through such causes.

19. Limitation of City's Liability

NOTWITHSTANDING ANYTHING ELSE IN THIS AGREEMENT TO THE CONTRARY, ANY CITY OBLIGATION CONTAINED IN THIS AGREEMENT, INCLUDING ANY OBLIGATION TO PAY MONEY, IS NOT A DEBT OR GENERAL OBLIGATION OF CITY, BUT RATHER IS PAYABLE SOLELY AND EXCLUSIVELY FROM ANNUALLY APPROPRIABLE REVENUES AND RECEIPTS

OF CITY'S GENERAL OPERATIONS.

20. No City Personnel Liability

Any City obligation contained in this Agreement, including any obligation to pay money, is an obligation of the City and not an obligation of any member of the City Council or any employee, other elected official, officer, or agent of the City in either an individual or an official capacity.

21. Absence of Certain Commercial Practices

Neither Developer nor any officer, member, director, employee or agent of them (nor any person acting on behalf of any of the foregoing), has given or agreed to give any gift or similar benefit, including, without limitation, any contribution, payment or expenditure, of more than normal value to any customer, supplier, City or other governmental employee or official or any other person who is or may be in a position to help or hinder the foregoing entities or assist them in connection with any actual or proposed activity described in this Agreement.

22. Governing Law; Venue

The law of the State, without regard to any conflict of law provision that would direct a court to use the laws of another jurisdiction, govern this Agreement. The Parties submit to venue and jurisdiction in the state and federal courts of the State.

23. State Law Limitations

Notwithstanding anything else in this Agreement to the contrary, the City's commitments are subject to the provisions of the South Carolina Code Annotated, as well as all local laws.

24. Developer and City Responsibility.

Developer, and its officers, directors and employees, agree to hold the City harmless from all claims, liabilities, damages, losses, including attorney's fees and expenses for bodily injury, sickness or death, and property damage or destruction which may be claimed against the City due to any acts or omissions by the Developer or its officers, employees or agents related to the administration of the Project. The City is a governmental entity and political subdivision of the State of South Carolina and enjoys sovereign immunity, as well as the imposition of duties and protections afforded by the South Carolina Tort Claims Act. By law, the City cannot hold harmless any contracting party. However, subject to the application of the aforementioned law and to the limits of its insurance, the City agrees that the Developer, and its officers, directors and employees shall not be liable from and against all claims, liabilities, damages, losses, including attorney's fees and expenses for bodily injury, sickness, or death, and property damage or destruction (other than to the Work itself) related to the negligent acts or omissions by the City, and the Developer's officers, employees, and agents.

25. Dispute Resolution.

(a) In the event of a dispute arising under this Agreement, the parties agree to engage in good faith discussions to resolve the matter amicably.

(b) If the dispute cannot be resolved through discussions, the parties agree to participate in non-binding mediation, with a mutually agreed-upon mediator, as a condition precedent to further legal proceedings.

(c) If mediation is unsuccessful, the parties agree to submit venue and jurisdiction in the state or federal courts located in County of Greenville, State of South Carolina.

(d) Each party shall bear its own costs of mediation, except that the costs of the mediator ~~or~~ shall be shared equally .

26. Benefit of the Parties.

This Agreement is intended to benefit the Parties hereto only, and therefore no third party shall have any rights under this Agreement, or be deemed a third-party beneficiary.

27. Notices.

Unless specifically provided otherwise by this Agreement, any notice, demand, request, consent, approval or communication which a Party is required to or may give to another Party hereunder shall be in writing and shall be delivered or addressed to the other at the address below set forth or to such other address as such Party may from time to time direct by written notice given in the manner herein prescribed. Any written notice or written certification or payment required by the Terms of this Agreement shall be deemed given if delivered in person or mailed certified mail, return receipt requested to the persons named below. The Parties shall make reasonable inquiry to determine whether the names or titles of the persons listed in this Agreement should be substituted with the name of the listed person's successor.

If to the City:
_____
Attn: _Tee Coker_____
425 E. Curtis Street
Simpsonville, SC 29681
Email: tcoker@simpsonville.com

With a copy to:
Duggan & Hughes, LLC
Attn: Daniel R. Hughes
P.O. Box 449
Greer, SC 29652
Email: dhughes@dugganhughes.com

If to Developer:
Blue Ridge Land Holdings, LLC
Attn: John T. Pazdan
P. O. Box 8856
Greenville, SC 29604
Email: chanticleer18@gmail.com

With a copy to:
Belmont Sayre, LLC
Attn: Kenneth M. Reiter
P. O. Box 1622
Carrboro, NC 27510
Email: kreiter@belmontsayre.com

28. **Jurisdiction**. This Agreement shall be binding upon the parties hereto and governed by the laws of the State of South Carolina.

29. **Counterparts**. This Agreement may be executed in one or more counterparts and shall become effective when one or more counterparts have been signed by all of the Parties; each counterpart shall be deemed an original but all counterparts shall constitute a single instrument.

30. **Agreement to Cooperate**. In the event of any legal action instituted by a third party or other governmental entity or official challenging the validity of any provision of this Agreement, the Parties hereby agree to cooperate in defending such action; provided, however, each Party shall retain the right to pursue its own independent legal defense.

31. **Severability**. In the event that a court of competent jurisdiction holds that a provision or requirement of this Agreement violates any applicable law, each such provision or requirement shall be replaced with a revision which accomplishes the purposes outlined herein and shall be enforced only to the extent it is not in violation of law or is not otherwise unenforceable and all other provisions and requirements of this Agreement, not contingent thereon, shall remain in full force and effect.

34. **Organization and Power.** Developer represents and warrants to the City that it (i) is a limited liability company organized, validly existing, and in good standing under the laws of the State of South Carolina, (ii) has the power to engage in the transactions contemplated hereby; and (iii) has the full power, authority and legal right to execute and deliver this Agreement and other documents and to perform and observe the terms and provisions thereof. The City represents and warrants to Developer that it has the right, power and authority to execute and deliver this Agreement and to perform and observe the terms thereof. This Agreement, when executed and delivered by the parties, is a valid and binding obligation of the parties and is enforceable in accordance with its terms, subject to the conditions precedent set forth above.

[ONE SIGNATURE PAGE AND ONE EXHIBIT FOLLOW]
[REMAINDER OF PAGE SUBSTANTIVELY BLANK]

WHEREFORE by its signature, the City binds itself and successors in interest as of the effective date provided in this Agreement's preamble.

CITY OF SIMPSONVILLE, SOUTH CAROLINA

By _____
_Paul Shewmaker, Mayor

[SEAL]

ATTEST:

_____
Ashley Clark, Municipal Clerk

Date of Execution: _____, 2025

[SIGNATURES CONTINUE ON THE FOLLOWING PAGE]

WHEREFORE by its signature, Developer binds itself and its successors in interest as of the effective date provided in this Agreement's preamble.

BLUE RIDGE LAND HOLDINGS, LLC

By: _____
John T. Pazdan, Member

Date of Execution: _____, 2025

EXHIBIT A

DESCRIPTION OF CITY PROPERTY

All that certain piece, parcel or tract of land with improvements thereon situate, lying and being in the City of Simpsonville, County of Greenville, State of South Carolina, containing 1.42 acres, more or less, bound on the north by lands now or formerly of United Federal Savings & Loan Association and Wesley V. Harrison, on the east by Hedge Street, on the south by lands now or formerly of Hendricks Properties, Inc., and on the west by N. Main Street.

This being the identical property conveyed to City of Simpsonville, a municipal corporation, by deed of Duke Power Company, dated June 6, 1996, and recorded August 13, 1996, in the Greenville County ROD Office in Deed Book 1649 at Page 1669.

TMS 0315.00-02-004.00

EXHIBIT B

DESCRIPTION OF FORMER BANK PROPERTY

Parcel 1:

All that certain piece, parcel, or lot of land, situate, lying and being in the Town of Simpsonville, County of Greenville, State of South Carolina, at the southeast corner of College and North Main Streets, and having, according to a survey made by Piedmont Engineering Service on October 2, 1951, the following metes and bounds, to-wit:

BEGINNING at the southeast intersection of College and North Main Streets, and running thence with North Main Street, S. 25-23 E., 128 feet to an iron pin; thence N. 64-24 E., 100 feet to an iron pin; thence N. 25-23 W., 129.7 feet to an iron pin on the south side of College Street; thence with the south side of College Street; thence with the south side of College Street, S. 63-36 W., 100 feet to the point of beginning.

Parcel 2:

ALL that lot of land, with improvements thereon, situate on the Southeastern side of College Street, Town of Simpsonville, Austin Township, Greenville County, State of South Carolina, shown as a portion of Lot No. 1, on Map No. 1, of A. R. Hunter Estate, made by W. J. Riddle, August, 1947, and having, according to said Map, the following metes and bounds, to-wit:

BEGINNING at an iron pin on the Southeastern side of College Street, said point being 100.ft. in a Northeasterly direction from the point where the Northeastern side of North Main Street· intersects with the Southeastern side of College Street, and running thence with the Southeastern side of College Street, N. 63-35 E. 132 ft, to an iron pin with the line of Lot No, 4; thence S. 26-42 E., 131.5 ft. to an iron pin; thence with the line of Lot No, 2, S-64-24 W, 134 ft. to an iron pin in the joint line of Lots 1 and 2, said point being 100 ft, in a Northeasterly direction from the joint front corner of Lots 1 and 2; thence through Lot No. 1 N. 25-23 W., 131 ft., more or less, to the beginning corner.

Parcel 3:

ALL that certain piece, parcel or lot of land, with all improvements thereon, containing 0.37 acres, more or less, situate, lying and being in the Town of Simpsonville, County of Greenville, State of South Carolina, located at the southwestern corner of the intersection of West Hedge Street and East College Street, and being shown on a plat entitled Survey for S & S Properties, a South Carolina General Partnership, prepared by Landrith Surveying, dated February 1, 1990, recorded in Plat Book 18-G at Page 11, and having, according to a survey entitled "Property of American Federal Bank, FSB", prepared by Freeland-Clinkscales & Associates, Inc., dated July 23, 1992, recorded in Plat Book 23-F at Page 35, the following metes and bounds, to-wit:

BEGINNING at an iron pin on the southern side of College Street at the joint corner of Lots 1 and 4; thence with said College Street N 63-35-00 E 132.99 feet to an iron pin at the intersection of College Street and Hedge Street; thence with the south-stern side of Hedge Street S 20-21-39 D 131.00 feet to an iron pin at the joint corner of Lots 2 and 4; thence with the common line of said properties S 63-08-00 W 118.47 feet to an iron pin at the joint corner of Lots 1 and 4; thence with the common line of said properties N 26-43-23 W 131.20 feet to an iron pin, the point of BEGINNING.

BEING ALSO DESCRIBED AS FOLLOWS:

All that certain piece, parcel or tract of land with improvements thereon situate, lying and being in the State of South Carolina, County of Greenville, City of Simpsonville, adjacent to North East Main Street, College Street and Hedge Street, identified as Lot 1 & 4, Map No. 1, A. R. Hunter Est., containing 1.069 Acres, 46,548 Sq. Ft., more or less, on a survey entitled SURVEY FOR BLUE RIDGE LAND HOLDINGS LLC, prepared by Site Design, Inc., dated March 22, 2021, and recorded May 7, 2021, in the Greenville County ROD Office in Plat Book 1397 at Page 56, reference to said survey being hereby made for a more complete metes and bounds description thereof.

This being the identical property conveyed to Blue Ridge Land Holdings, LLC, a South Carolina limited liability company, by Truist Bank, a North Carolina banking corporation, by (i) warranty deed dated April 28, 2021, and recorded May 7, 2021, in the Greenville County ROD Office in Deed Book 2623 at Page 2891, and (ii) quitclaim deed dated April 28, 2021, and recorded May 7, 2021, in the Greenville County ROD Office in Deed Book 2623 at Page 2899.

TMS0315.00-02-001.00

EXHIBIT C

DESCRIPTION OF CREDIT UNION PROPERTY

Tract A:

ALL THAT PIECE, PARCEL OR LOT OF LAND IN SIMPSONVILLE TOWNSHIP, GREENVILLE COUNTY, STATE OF SOUTH CAROLINA, SHOWN ON PLAT OF PROPERTY ENTITLED D. L. BRAMLETT, JR., MADE BY C.O. RIDDLE, DATED AUGUST 1960 AND RECORDED IN THE ROD OFFICE FOR GREENVILLE COUNTY IN PLAT BOOK OO AT PAGE 534 AND 535, AND HAVING, ACCORDING TO SAID PLAT, THE FOLLOWING METES AND BOUNDS, TO-WIT:

BEGINNING AT AN IRON PIN ON THE EASTERN SIDE OF NORTH MAIN STREET, 48.1 FEET NORTH OF THE INTERSECTION OF EAST CURTIS STREET AND RUNNING THENCE ALONG THE EASTERN SIDE OF NORTH MAIN STREET N 22-48 W, 133.3 FEET TO AN IRON PIN AT THE CORNER OF PROPERTY THIS DAY CONVEYED TO GEO. A. WEBB; THENCE ALONG SAID PROPERTY N 70-47 E, 334.8 FEET TO AN IRON PIN ON THE WESTERN SIDE OF HEDGE STREET; THENCE ALONG SAID STREETS 15-10 E, 68.7 FEET TO AN IRON PIN AT THE CORNER OF PROPERTY NOW OR FORMERLY OF ETHEL M. HILL; THENCE S 64-50 W ALONG THE HILL AND MAYFIELD PROPERTIES, 102 FEET TO AN IRON PIN; THENCE S 65-44 W, ALONG THE CANNON, HA YNES AND TODD PROPERTIES 75 FEET TO AN IRON PIN; THENCE S 23-56 E, 30 FEET TO AN IRON PIN; THENCE ALONG THE TOWN PROPERTY S 66-35 W, 30 FEET TO AN IRON PIN; THENCE S 23-56 E, 9 FEET TO AN IRON PIN; THENCE S 66-35 W, 19.5 FEET TO AN IRON PIN; THENCE S 23-56 E, 3.83 FEET TO AN IRON PIN; THENCE ALONG PROPERTY OF WOOTENCORPORATION, JONES AND BRAMLETT, S 67-12 W, 99.3 FEET TO THE POINT OF BEGINNING.

Tract B:

ALL THAT CERTAIN PIECE, PARCEL OR LOT OF LAND IN GREENVILLE COUNTY, ST A TE OF SOUTH CAROLINA, LOCATED ON THE EASTERLY SIDE OF MAIN STREET IN THE TOWN OF SIMPSONVILLE, AND BEING DESCRIBED AS FOLLOWS:

BEGINNING AT AN IRON PIN ON THE EASTERLY SIDE OF MAIN STREET IN THE TOWN OF SIMPSONVILLE AND RUNNING THENCE N 74-56 E, 172.5 FEET TO AN IRON PIN; THENCE N 75-02 E 164.6 FEET TO AN IRON PIN ON THE WESTERLY SIDE OF HEDGE STREET; THENCE WITH PROPERTY OF GRANTEE HEREIN S 70-47 W, 334.8 FEET TO AN IRON PIN ON THE EASTERLY SIDE OF MAIN STREET; THENCE WITH THE EASTERLY SIDE OF MAIN STREET N 22-48 W, 23.75 FEET TO AN IRON PIN, THE BEGINNING CORNER.

Tract C:

ALL THAT CERTAIN PIECE, PARCEL OR LOT OF LAND LYING, BEING SITUATE IN THE COUNTY OF GREENVILLE, STATE OF SOUTH CAROLINA, BEING SHOWN AND DESIGNATED ON A PLAT ENTITLED "DUKE POWER COMPANY, SIMPSONVILLE BRANCH OFFICE"

DATED DECEMBER 22, 1987 AND HAVING, ACCORDING TO SAID PLAT, THE FOLLOWING METES AND BOUNDS, TO-WIT:

BEGINNING AT AN IRON PIN FOUND ALONG THE EASTERN EDGE OF S. C. HIGHWAY 14 AND U.S. HIGHWAY 276 (N. MAIN STREET) JOINT CORNER OF A 1.42 ACRE TRACT AND RUNNING THENCE N 68-1-51 E, 339.23 FEET TO A PK NAIL IN ROAD ALONG THE WESTERN EDGE OF W. HEDGE STREET; THENCE RUNNING ALONG THE WESTERN EDGE OF W. HEDGE STREET 15-21-15 E, 38.00 FEET TO A PK NAIL IN ROAD ALONG THE WESTERN EDGE OF W. HEDGE STREET; RUNNING THENCE S 74-39-45 W, 337.10 FEET TO AN IRON PIPE FOUND ALONG THE EASTERN EDGE OF S.C. HIGHWAY 14AND U.S. HIGHWAY 276 (N. MAIN STREET), THE POINT OF BEGINNING.

This being the identical property conveyed to Secured Advantage Federal Credit Union by deed of Pontus Vault Portfolio, LLC dated August 28, 2024, and recorded September 20, 2024, in the Greenville County ROD Office in Deed Book 2731 at Page 2652, which deed corrects a prior deed between the parties recorded June 12, 2019, in Deed Book 2568 at Page 1149.

TMS 0315.00-02-006.00

EXHIBIT D

DEPICTION OF PROJECT FACILITIES

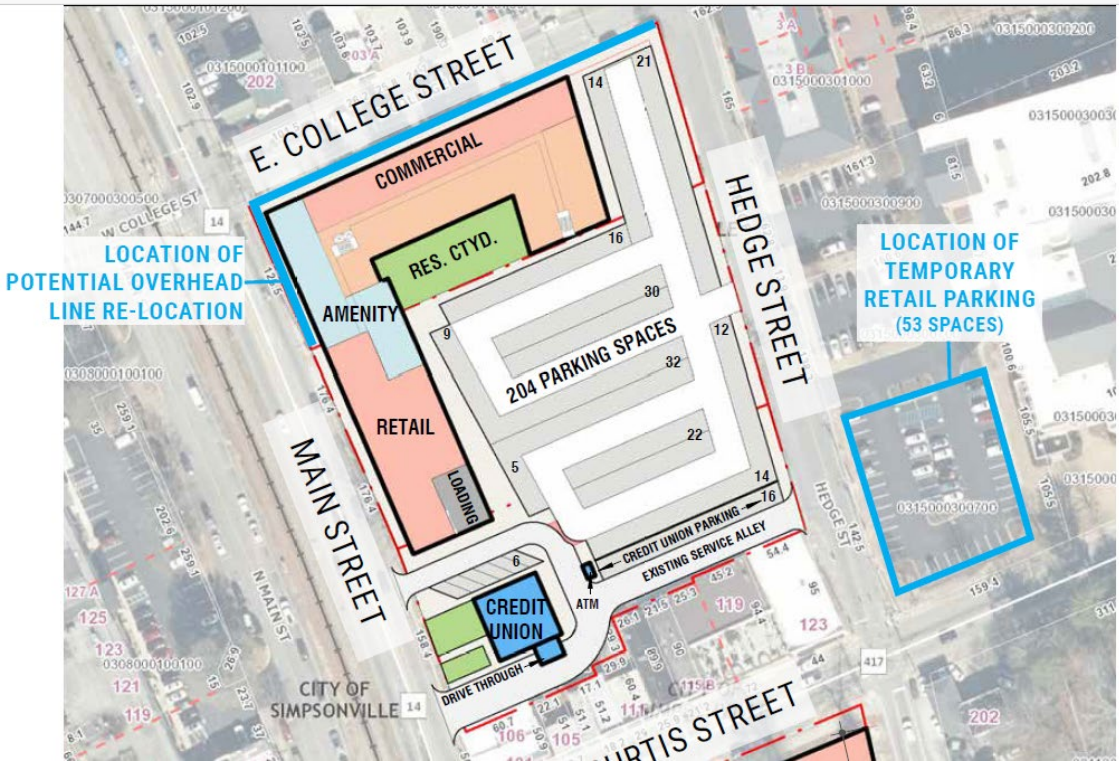


EXHIBIT E

CONSTRUCTION SCHEDULE

September 30, 2025 – Developer obtains Rezoning.

March 31, 2026 – Design and construction plans for the Project finalized and submitted to the City.

June 1, 2026 -- Building and site construction and land disturbance permits issued.

June 30, 2028 – Project construction completed and leasing commences. Residents and businesses begin to take occupancy.

EXHIBIT F

STREETSCAPE IMPROVEMENTS

EXHIBIT G

AREA OF HEDGE STREET TO BE NARROWED

[ATTACHED ON THE FOLLOWING PAGE]

AGENDA ITEM

November 17, 2025

To:	City Council
From:	Planning Director, Jon Derby
Subject:	Textile Rehabilitation Certification, Burdette Textile Mill
Meeting Date:	**November 25, 2025**
Type of Agenda Item:	Resolution
Attachments:	Resolution

REQUEST

The City of Simpsonville has received a request to certify, by Resolution, that 118 NE Main St. & 124 NE Main St. (Tax Map# 0315.00-02-004.00 & 0315.00-02-001.00) are the former locations of textile manufacturing operations that served the contiguous sites of the Burdette Building and the Simpsonville Oil Mill gin. This will allow the property owners to apply for income tax credits to help offset the costs of redeveloping the sites.

LOCATION & SITE DESCRIPTION

The subject properties are located at 118 NE Main St. & 124 NE Main St. These locations currently contain the old City Hall site and the prior Suntrust / AAA Insurance building.

STAFF COMMENTS

Staff finds that there is evidence that this site, along with the surrounding properties, were used for textile manufacturing. By obtaining income tax credits, there will not be a negative monetary impact to the City.

Burdette District Redevelopment

PIN / Tax Map #

0315000200100

0315000200400

Simpsonville, South Carolina

REQUEST FOR TEXTILE MILL SITE CERTIFICATION

BelmontSayre
PARTNERS IN URBAN TRANSFORMATION

October 31, 2025

TABLE OF CONTENTS

Timeline of Ownership and Uses
Location of Mill Buildings
Documentation of Acquisition by Current Owners
Evidence of Mill Closure and Details on Operations over Last 1+ Years
Geographic Area of Textile Mill Site
Confirmation that Facility has not Previously Received Textile Mill Credits
Estimated Investment & Timeline

Exhibit A - Evidence of Use / Closure of Facility
Exhibit B - Property Reports

TIMELINE OF OWNERSHIP AND USES

The Burdette Textile Facility is significant for its association with the textile industry in South Carolina during its most successful period of expansion and production. The parcels included in the Burdette Textile Facility were contributing parts to the growth of Simpsonville during the twentieth century with the textile industry at its center.

A record of ownership for each parcel from the Greenville County real property services is attached.

0315000200100 – Blue Ridge Holdings
0315000200400 – City of Simpsonville

Between the 1930s and 1970s Sanborn maps and aerial photographs show several light industrial and warehouse buildings on the parcels. These buildings are locally known to have served the textile manufacturing operations in different capacities through those decades, both as cotton and finished product warehousing and light industrial uses supporting the textile manufacturing. Previous owners of these parcels included local business people that operated textile concerns or companies supporting textile manufacturing operations including Rainwood, Inc. a company owned and operated by textile businessmen James H. Woodside and F.D. Rainey.

These parcels are contiguous to the former Burdette manufacturing facility that operated at the corner of Hedge Street and East Curtis Street between 1951 and 1974 on parcel # 0315000300700. Property records indicate that B.W. Burdette purchased that property in 1951 and local accounts and aerial photos show and large one-story textile manufacturing building until the late 1970s. The property was sold by Burdette in 1979 and a 1981 aerial photo shows that the manufacturing building was replaced at the same time structures on the three parcels above were demolished.

LOCATION OF MILL BUILDINGS

The parcels are located in the City of Simpsonville, South Carolina. Jointly they are bound on the west by North Main Street, to the east by Hedge Street, to the north by College Street, and at the south by a series of commercial parcels facing south toward East Curtis Street.

According to local accounts the parcels were integral to textile operations are in close proximity to several sites that previously manufactured textiles including the Burdette Building at the corner of East Main and East Curtis Street, a Burdette-owned facility formerly located at the northeast corner of Hedge Street and East Curtis Street, and the Simpsonville Oil Mill ginning facility formerly located on the block west of Main Street and south of College Street.

DOCUMENTATION OF ACQUISITION BY CURRENT OWNERs

Current owners of the Burdette District are as follows:

0315000200100 – Blue Ridge Holdings, LLC
0315000200400 – Blue Ridge Holdings, LLC

EVIDENCE OF MILL CLOSURE AND DETAILS ON OPERATIONS OVER THE LAST 1+ YEARS

The parcels of land associated with PIN / Tax Map # 0315000200100 and 0315000200400 were instrumental in the manufacturing and operations of textiles concerns in downtown Simpsonville. The operations on these parcels and the textile manufacturing facilities that historically operated proximate to these parcels all went out of operation prior to 1980. The Simpsonville Oil Mill gin and the Burdette manufacturing facility have both been demolished. The ancillary uses on these three parcels likewise ceased by 1981 and the parcels currently hold a series of commercial buildings and the City Hall.

See Exhibit A.

GEOGRAPHIC AREA OF TEXTILE MILL SITE

The textile mill site consisting of the 3 parcels identified above contained structures that were integral to textile manufacturing processes and ancillary uses on the site and activities at the Burdette Building, Simpsonville Oil Company cotton gin and other associated textile activity in downtown Simpsonville.

These primary uses were related to textile manufacturing, dyeing, or finishing operations on a textile mill site consisting of sales, distribution, storage, water runoff, wastewater treatment and detention, pollution control, landfill, personnel offices, security offices, employee parking, dining and recreation areas, and internal roadways or driveways directly associated with such uses.

CONFIRMATION THAT FACILITY HAS NOT PREVIOUSLY RECEIVED TEXTILE MILL CREDITS

None of the property identified as 0315000200100 nor 0315000200400 has received the textile mill credits.

A nearby building and lot, the Burdette Building, has received Textile mills credits, and is listed in the National Register of Historic Places. The remaining portion of the Burdette Building has not received Textile mill credits.

ESTIMATED INVESTMENT & TIMELINE

The total investment related to the redevelopment of the two tax parcels will be approximately $25 million. Construction is expected to start in Q3 2026 and be completed in Q4 2027.

EXHIBIT A – EVIDENCE OF USE/CLOSURE OF FACILITY


Sanborn Map 1930

Aerial Map 1955 showing previous textile manufacturing and ancillary building footprints


Aerial Map 1976 showing previous textile manufacturing and ancillary building footprints

Aerial Map 1981 showing current structures after demolition of textile use


Sanborn Map 1930

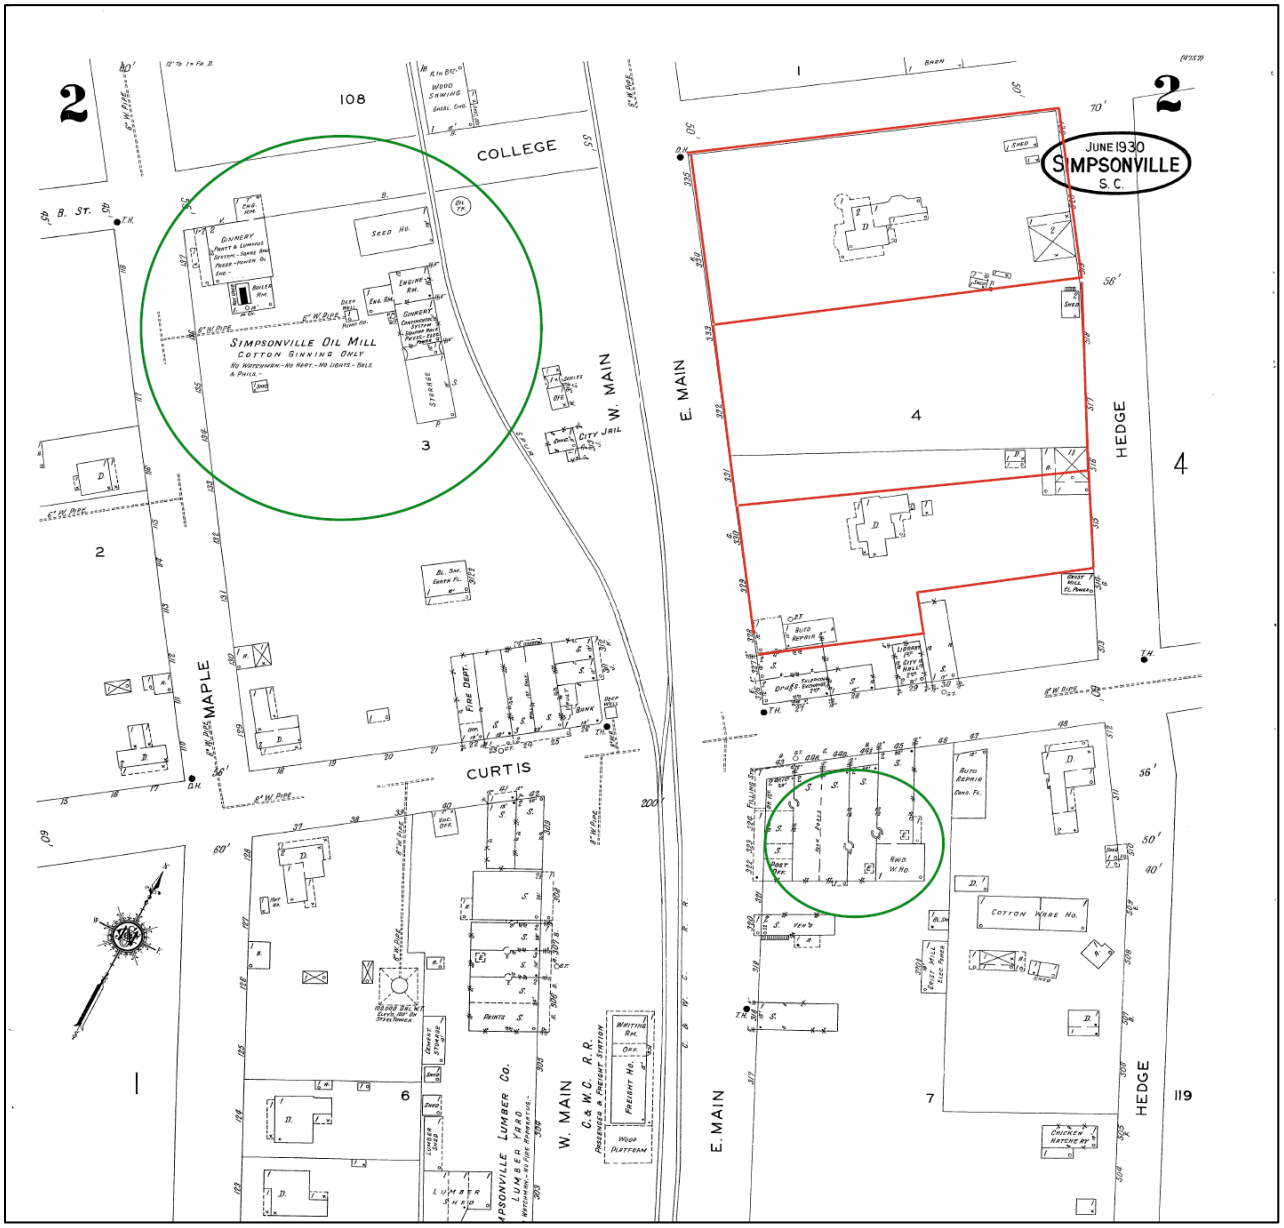

Aerial Maps 1955

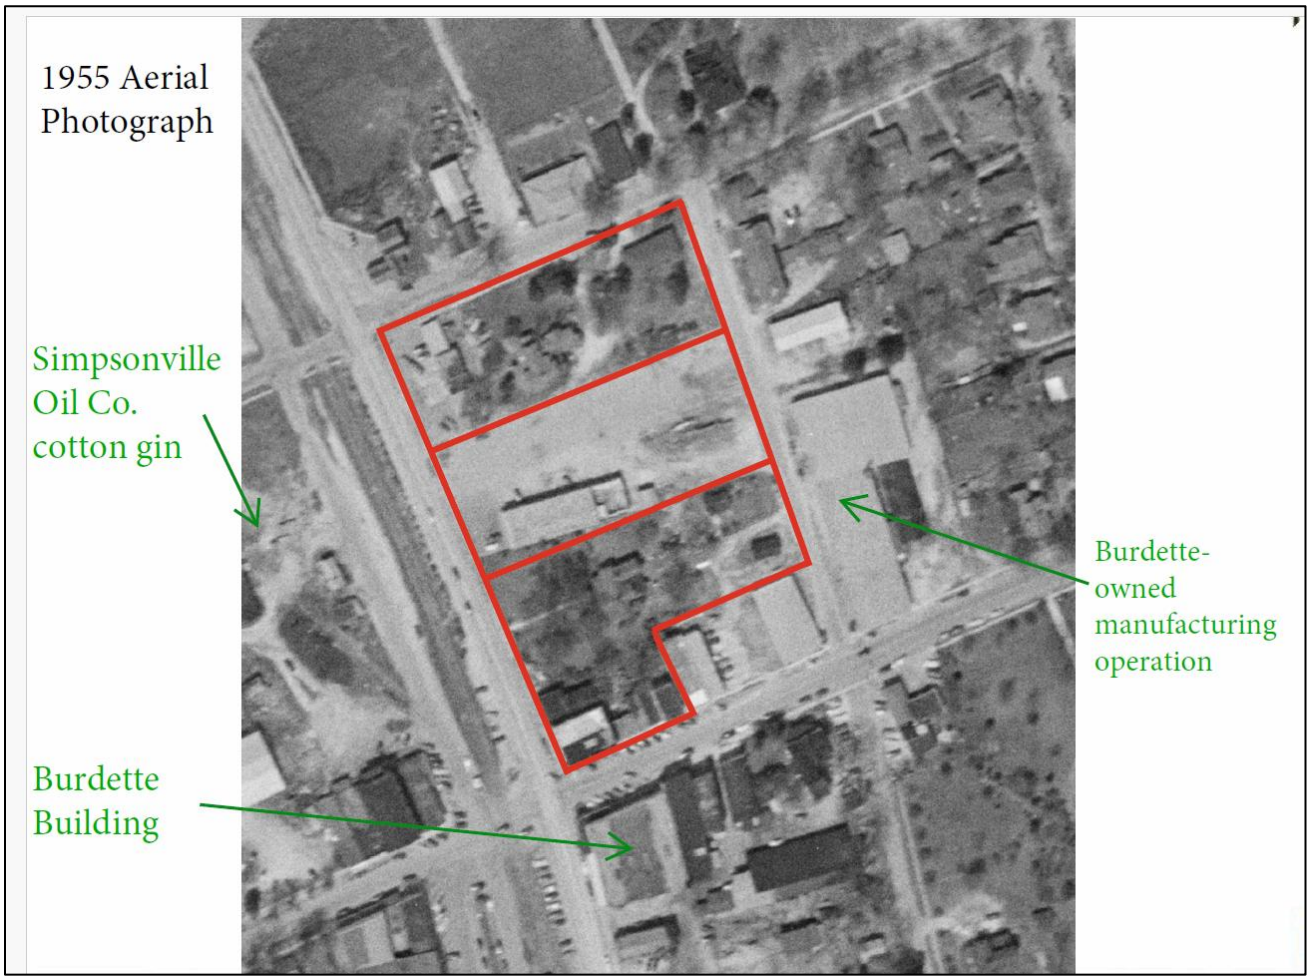

Aerial Map 1976

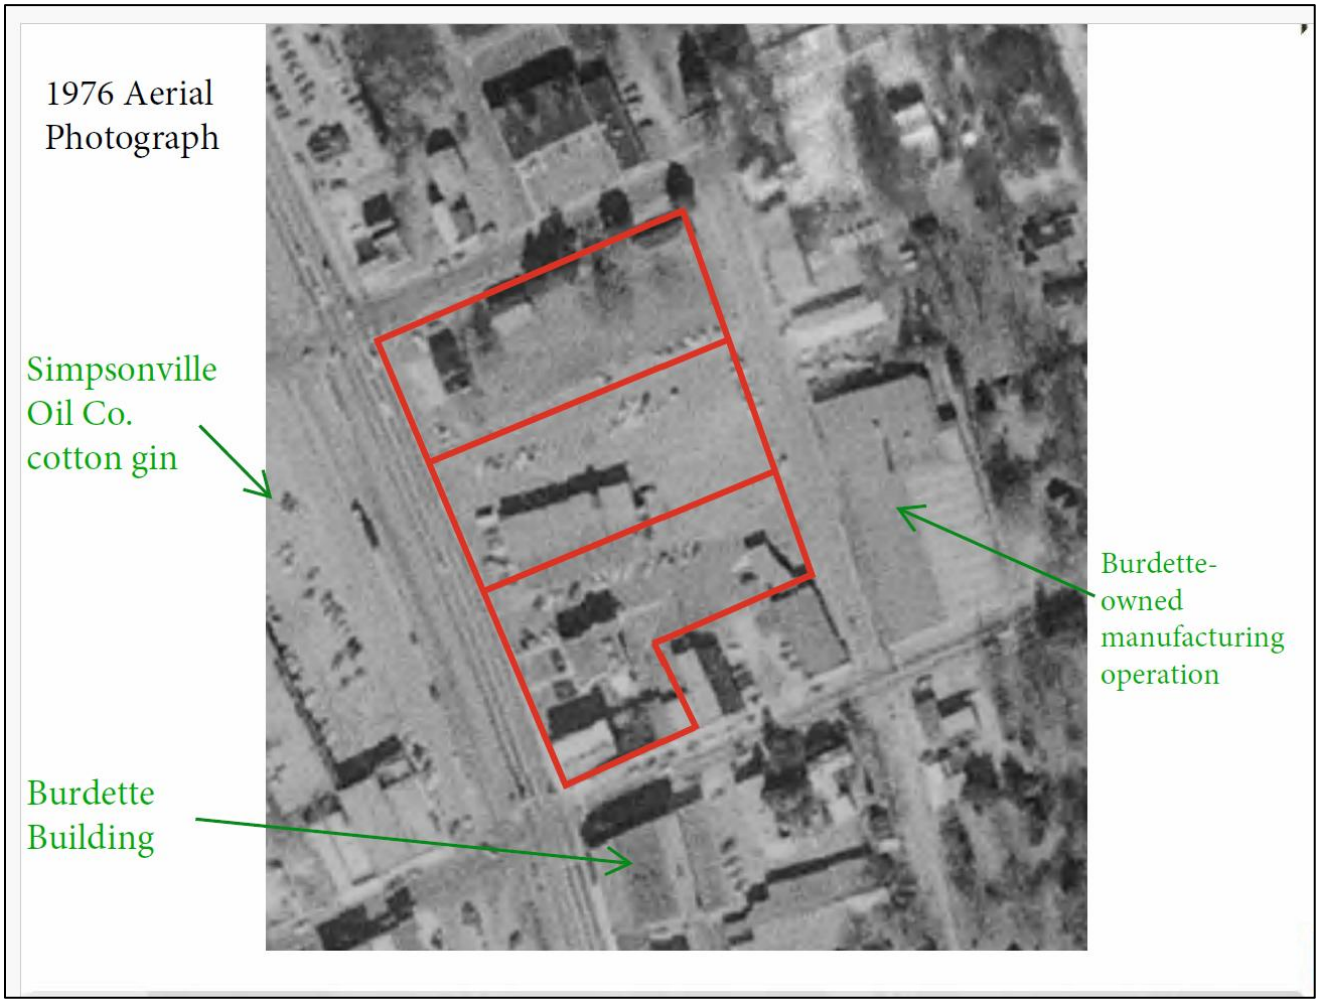

Aerial Maps 1981



EXHIBIT B – PROPERTY REPORTS

Burdette North Property

PIN / Tax Map #

0315000200100

Greenville County, SC - Property Report	Convert to PDF	10/31/2025
PIN / Tax Map #		
0315000200100		



Owner Information	
Owner Name	BLUE RIDGE LAND HOLDINGS LLC
Additional Owner Name	
Care Of	
Mailing Address	828 East Blvd
City	Charlotte
State	NC
Zip Code	28203

Greenville County

Mobile Maps and Information

Disclaimer: Map and parcel data are believed to be accurate, but accuracy is not guaranteed. This is not a legal document and should not be substituted for a title search, appraisal, survey, or for zoning verification.

Parcel Information			
Acres	Description	Location	Subdivision
1.090	4, Pt 1	Main	

Reference Information				
Deed Book	Deed Page	Deed Date	Plat Book	Plat Page
2623	2891	5/7/2021	1397	56

Building Information			
Bedrooms	Bathrooms	Half Baths	Square Feet
0	0	0	0

Classification		
Land Use	Jurisdiction	Homestead Code
421 - Office - General	County Jurisdiction	No

Values			
Fair Market Value	Taxable Market Value	Sales Price	Total Rollback
$760,990	$729,120	$725,000	$0

Taxes / Fees				
Tax District	County Stormwater Fee	City Stormwater Fee	Taxes	Taxes Paid Date
899	$0	$0	$13,820.09	

PROPERTY

899

SHEET NO. 315	BLOCK NO. 2	LOT NO. 1	TAX DISTRICT ~~299~~	CARD NO.

LISTED 1 - N. Main & College Sts.

DESCRIPTION Pt. Lot #1 A. R. Hunter Est. R-111

RECORD OF OWNERSHIP	DATE VOL., PAGE	ADDRESS	MEMORANDUM
Rainwood, Inc.	9-10-51 441-477		0.694
Woodside, James H. & Rainey, F. D.	3-5-65 768-581		
Whitmire, E. G. Jr.	6-2-69 874-505		
P., David H., Charles G., Whitmire, E. G. Jr., Green, A. E., Younts, Melvin K., Garrett, Blake	11-3-69 888-579	Rabb, Stuart W., Edwards, Virginia W. & Case, Charles D. 1044-103	
Jr., David H., Charles G., Whitmire, E. G. Jr., Rabb, Green, A. E., Younts, Melvin K., Garrett, Blake P.	12-21-73 991-193	Stuart W., Edwards, Virginia W. ~~& Case, Charles D.~~	
United Federal Savings & Loan Association	1-12-87 1049-592	JR. 77-79 1049-580 984-373	
American Federal Savings & Loan Association	8-25-82 1172-746		

KEYS PRINTING, GREENVILLE, S. C.

Burdette North Property

PIN / Tax Map #

0315000200400

Greenville County, SC - Property Report	Convert to PDF	10/31/2025
PIN / Tax Map #		
0315000200400		



Owner Information	
Owner Name	BLUE RIDGE LAND HOLDINGS LLC
Additional Owner Name	
Care Of	
Mailing Address	Po Box 8856
City	Greenville
State	SC
Zip Code	29604

Greenville County

Mobile Maps and Information

Disclaimer: Map and parcel data are believed to be accurate, but accuracy is not guaranteed. This is not a legal document and should not be substituted for a title search, appraisal, survey, or for zoning verification.

Parcel Information			
Acres	Description	Location	Subdivision
1.430	2,3,	Main	

Reference Information				
Deed Book	Deed Page	Deed Date	Plat Book	Plat Page
2759	834	7/17/2025	1522	21

Building Information			
Bedrooms	Bathrooms	Half Baths	Square Feet
0	0	0	0

Classification		
Land Use	Jurisdiction	Homestead Code
421 - Office - General	Municipality Ownership	No

Values			
Fair Market Value	Taxable Market Value	Sales Price	Total Rollback
$1,422,610	$803,310	$840,000	$0

Taxes / Fees				
Tax District	County Stormwater Fee	City Stormwater Fee	Taxes	Taxes Paid Date
899	$0	$0	$432	

PROPERTY

899

SHEET NO. 315	BLOCK NO. 2	LOT NO. 4	TAX DISTRICT ~~299~~	CARD NO.

LISTED 1 - N. Main St.

DESCRIPTION Lot #2 Map #1 A. R. Hunter Prop. R-111 4 FR LTN NO. TR. ALSO Lot 3

RECORD OF OWNERSHIP	DATE VOL., PAGE	ADDRESS	MEMORANDUM
Roberts, G. A.			~~1.565A~~ 1.423AC
Burgess, Clyde	1-19-53 470-337		
Webb, George W.	3-2-60 646-58	See	Pt to BANKERS TRUST (NCNB) for S.T. (315-2-6) 3/3/88 .142AC
Webb, Annie B.	5-1-61 838-361	for 1968	
70% Int 30% Int Webb Webb, Annie B. & (George W. Tr. for Rose Mary)	5-1-61 886-434	102 S. Pliney St. FOR 1970 Simpsonville SC	
JOINT JOINT Webb, Annie B. & Jenkins, Rosemary Webb	1-23-81 1141-433		
Tr. for Jenkins, Bradley T. & Stephanie Jenkins, Rosemary Webb, & Webb, George as	1974 W-1361-18	PHONE # 963-3941 for 1982	
Hendricks Properties, A South Carolina Corp.	12-31-86 1281-985	1317-489,490	
Duke Power Company	3-10-88 1319-91		
City of Simpsonville	08-13-96 ~~1649-1669~~		

KEYS PRINTING, GREENVILLE, S. C.

Burdette Central

Burdette Building Property

Certified – September 8, 2020

PIN / Tax Map #

0311.00-01-001.00

Greenville County, SC - Property Report	Convert to PDF	10/31/2025
PIN / Tax Map #		
0311000100100		



Owner Information	
Owner Name	BURDETTE CENTRAL LLC
Additional Owner Name	
Care Of	
Mailing Address	828 East Blvd
City	Charlotte
State	NC
Zip Code	28203

Greenville County

Mobile Maps and Information

Disclaimer: Map and parcel data are believed to be accurate, but accuracy is not guaranteed. This is not a legal document and should not be substituted for a title search, appraisal, survey, or for zoning verification.

Parcel Information			
Acres	Description	Location	Subdivision
2.090	None	Main	

Reference Information				
Deed Book	Deed Page	Deed Date	Plat Book	Plat Page
2563	3165	4/15/2019	1233	55

Building Information			
Bedrooms	Bathrooms	Half Baths	Square Feet
0	0	0	0

Classification		
Land Use	Jurisdiction	Homestead Code
520 - Retail - General	County Jurisdiction	No

Values			
Fair Market Value	Taxable Market Value	Sales Price	Total Rollback
$6,065,260	$1,199,690	$10	$0

Taxes / Fees				
Tax District	County Stormwater Fee	City Stormwater Fee	Taxes	Taxes Paid Date
899	$0	$0	$23,721.93	

PROPERTY

899

SHEET NO. 311	BLOCK NO. 1	LOT NO. 1	TAX DISTRICT ~~299~~	CARD NO.

LISTED 1 - Main & E. Curtis Sts.

DESCRIPTION

RECORD OF OWNERSHIP	DATE VOL., PAGE	ADDRESS	MEMORANDUM
Dec'd 1-22-61	10-1-49	See Deeds 379-56, 310-335	
Burdette, B. W.	393-311	70-528, 18-168, NNN-628 & JJJ-772	1.84 AC
	09-5-97	Bennie W. Burdette W-894/110	
Co-Trustees of Trust U/W			
Bozeman, Bertha B. & NationsBank, N. A.,	1713-389	For 1997	

KEYS PRINTING, GREENVILLE, S. C.

RESOLUTION NO. 2020-04

A RESOLUTION

TO CERTIFY THE PROPERTY LOCATED AT 102 S.E. MAIN STREET AS AN ABANDONED TEXTILE MILL SITE UNDER THE SOUTH CAROLINA TEXTILE COMMUNITIES REVITALIZATION ACT.

WHEREAS, Burdette Central, LLC, a South Carolina limited liability company and its affiliates ("Developer") desires to redevelop the abandoned textile mill site located at 102 S.E. Main Street in the City of Simpsonville (the "City"), formerly owned and operated by a textile manufacturer, being more particularly identified as Greenville County Tax Map Parcel 0311.00-01-001.00 (the "Property") and upon which was located a building containing 14,374 square feet, the boundaries of which are depicted on the survey attached hereto as Exhibit A (the "Textile Mill Site");

WHEREAS, in connection with the redevelopment by Developer of the Textile Mill Site on the Property, the redevelopment expenditures are anticipated to qualify for state income tax credits pursuant to the South Carolina Textile Communities Revitalization Act (Chapter 65 of Title 12 of the South Carolina Code of Laws, 1976, as amended) (the "Act"); and

WHEREAS the Act contains a detailed definition of the specific property that will qualify as a "abandoned textile mill site" and provides that the redevelopment of abandoned textile mill sites into income producing properties for the community in which they are located serves a public purpose by creating jobs and capital investment in the community; and

WHEREAS, the Property is known as the Burdette Building and is designated as a historic building in the National Register of Historic Places and its history of textile manufacturing use is well known to the City and Developer has represented to the City that since it was acquired from Burdette Property of Simpsonville, L.L.C. on March 17, 2016, Developer has not occupied the Textile Mill Site on the Property and has not conducted any business operations thereon; and

WHEREAS, Developer has requested a certification of the Property as an abandoned textile mill site pursuant to Section 12-65-60 of the Act from the City;

NOW THEREFORE, BE IT RESOLVED BY THE MAYOR AND THE CITY COUNCIL OF THE CITY OF SIMPSONVILLE, SOUTH CAROLINA:

Section 1. Developer has submitted to the City a request to certify the Textile Mill Site upon the Property pursuant to Section 12-65-60 of the South Carolina Textile Communities Revitalization Act.

Section 2. Based solely upon the information supplied by Developer and the City's search of its business license records, the City hereby certifies (i) the Property known as the Burdette Building constitutes an abandoned textile mill as defined by

Section 12-65-20(1) of the Act, and (ii) the geographic area of the abandoned Textile Mill Site consists of the Burdette Building containing 14,374 square feet as depicted on the plat attached hereto as Exhibit A and is consistent with Section 12-65-20(4)(a) of the Act.

Section 3. This Resolution does not provide any tax relief whatsoever and the City expresses no opinion regarding the availability of any tax relief or benefit to Developer beyond the certification contained herein.

Section 4. This Resolution shall be effective upon the date of its adoption.

RESOLVED THIS 8th DAY OF September, 2020.

SIGNATURE OF MAYOR:

Paul D. Shewmaker

Paul Shewmaker

ATTEST:

Phyllis Long


Phyllis Long
City Clerk

APPROVED AS TO FORM:

David W. Holmes
City Attorney

RESOLUTION NO. 2020-04

EXHIBIT A

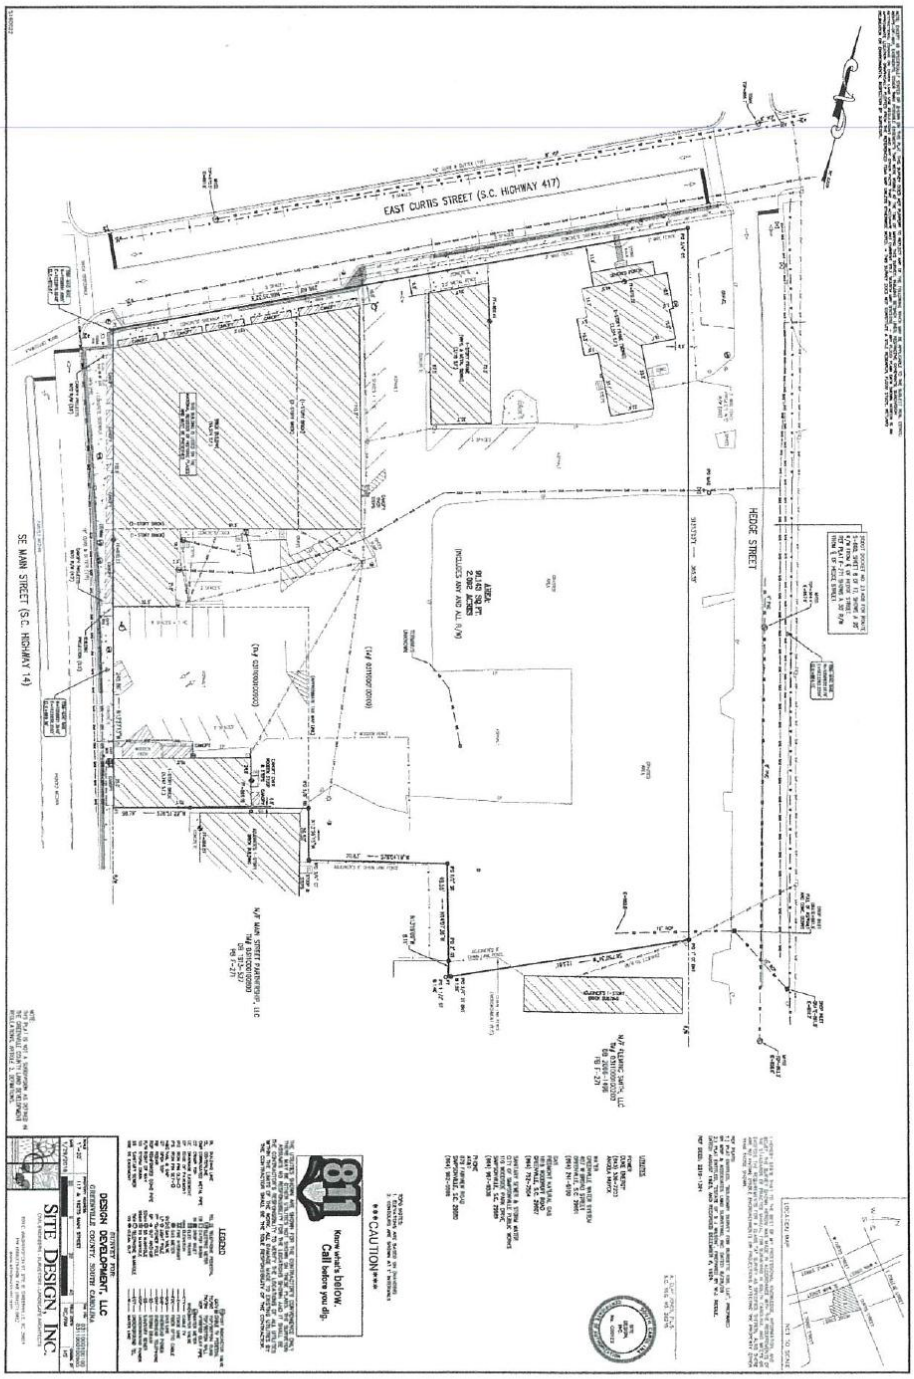

RESOLUTION NO. 2025-05

A RESOLUTION

TO PROVIDE CERTIFICATION AS PROVIDED BY SECTION 12-65-60 OF THE SOUTH CAROLINA TEXTILES COMMUNITIES REVITALIZATION ACT (S.C. CODE SECTION 12-65-10, ET SEQ.) FOR A PORTION OF THAT CERTAIN PROPERTY KNOWN AS THE BURDETTE DISTRICT, LOCATED BETWEEN MAIN STREET, COLLEGE STREET, HEDGE STREET AND CURTIS AVENUE, IN SIMPSONVILLE, SOUTH CAROLINA

WHEREAS, Blue Ridge Holdings, LLC and certain of its affiliates (collectively, the "Burdette South Owners") intend to restore and redevelop the Burdette Store, located on that certain land parcel identified as Greenville County TMS No. 0311.00-01-001.00 (the "Burdette South Property"), and Blue Ridge Holdings, LLC and certain of its affiliates and other property owners (collectively, the "Burdette North Owners") intend to redevelop certain additional textile mill properties located on those certain land parcels identified as Greenville County TMS Nos. 0315000200100 and 0315000200400 (collectively, the "Burdette North Property", and together with the Burdette South Property, the "Burdette District"), all generally located between Main Street, College Street, Hedge Street and Curtis Avenue, in Simpsonville , South Carolina, and the Burdette South Owners and the Burdette North Owners intend to rehabilitate such properties in a manner that qualifies for South Carolina income tax credits under the South Carolina Textiles Communities Revitalization Act, S.C. Code Section 12-65-10 et seq. (the "Act"); and

WHEREAS, pursuant to the Act, a taxpayer may apply to the municipality or county in which the textile mill site is located for a certification of the textile mill site made by ordinance or binding resolution of the governing body of the municipality or county. The certification shall include findings that the:

(1) textile mill site was a textile mill as defined in S.C. Code Section 12-65-20(3);

(2) textile mill site has been abandoned as defined in S.C. Code Section 12-65-20(1); and

(3) geographic area of the textile mill site is consistent with S.C. Code Section 12-65-20(4).

WHEREAS, in Resolution No. 2020-04, dated September 8, 2020, the Mayor and City Council of the City of Simpsonville, South Carolina certified the Burdette South Property as an abandoned textile mill site under the Act; and

WHEREAS, the Burdette North Owners have requested a certification in the form of a binding resolution of the Burdette North Property as an abandoned textile mill site pursuant to the Act in order to encourage investment by potential investors in the redevelopment of the Burdette North Property and the Burdette District as a whole; and

WHEREAS, the County has determined that the redevelopment of the Burdette North Property and the Burdette District as a whole will be highly beneficial to the City and the residents and businesses of the community surrounding the Burdette District.

NOW, THEREFORE, BE IT RESOLVED BY THE MAYOR AND THE CITY COUNCIL OF THE CITY OF SIMPSONVILLE, SOUTH CAROLINA:

Section 1. The Burdette North Owners have submitted to the City a request to certify the Burdette North Property as an abandoned textile mill site pursuant to Section 12-65-60 of the Act.

Section 2. Based upon the information supplied by the Burdette North Owners and the City's search of its records, the City hereby certifies that (i) the Burdette North Property was a textile mill as defined in S.C. Code Section 12-65-20(3), (ii) the Burdette North Property textile mill site has been abandoned as defined in S.C. Code Section 12-65-20(1), and (iii) the geographic area of the Burdette North Property textile mill site is consistent with S.C. Code Section 12-65-20(4).

Section 3. This Resolution does not provide any tax relief whatsoever and the City expresses no opinion regarding the availability of any tax relief or benefit to the Burdette North Owners beyond the certification contained herein.

Section 4. This Resolution shall be effective upon the date of its adoption.

RESOLVED THIS THE ___ DAY OF _____, 2025.

SIGNATURE OF MAYOR:

_____

Paul Shewmaker

ATTEST:

_____

Ashley Clark
City Clerk

APPROVED AS TO FORM:

_____

Daniel Hughes
City Attorney

City of Simpsonville – Submission of Agenda Item

(Due at 12 p.m. on the Tuesday prior to the meeting)

To: Ashley Clark, Clerk of Council

From: Tee Coker

Department: Administration

Date Submitted: 11/18/2025

Please include the following item on the agenda for:

☑ Committee of the Whole Meeting (4th Tuesday of the month) **Date:** 11/25/2025

☐ Business Meeting (2nd Tuesday of the month) **Date:**

Agenda Item Title: Resolution to Authorize Conveyance of Garrett Property to the City of Simpsonville

Summary of Item / Purpose:

This resolution would authorize the City to accept ownership of a 0.28-acre parcel (PIN# 0323000100104) from the current owner, Garrett Simpsonville Center LLC. The purpose of the conveyance is for the City to turn the parcel into a park.

Action Requested of Council:

☐ Discussion Only

☑ First Reading

☐ Second Reading

☐ Approval / Vote

☐ Other:

Are supporting documents attached?

☑ Yes ☐ No

RESOLUTION _____-2025

A RESOLUTION TO AUTHORIZE THE ACCEPTANCE OF VACANT LAND CONSISTING OF APPROXIMATELY 0.279 ACRES LOCATED BETWEEN FAIRVIEW ROAD AND S. MAIN STREET IN THE CITY OF SIMPSONVILLE

WHEREAS, Garrett Simpsonville Center, LLC, the owner of the property identified as 0.279 acres shown on the plat attached hereto as Exhibit "A," and further identified by Greenville County Tax Map No. 0323000100104 (hereinafter "the Property") desire to donate said property to the City of Simpsonville; and,

WHEREAS, the Mayor and Council find that the Property is best utilized for a municipal park or recreation area and further find that acceptance of the Property is in the best interests of the City.

NOW, THEREFORE, BE IT RESOLVED THAT:

Section 1. That the Property be accepted by the City of Simpsonville.

ADOPTED this _____ day of November 2025.

CITY OF SIMPSONVILLE, SOUTH CAROLINA

BY: _____
Paul Shewmaker, Mayor

ATTEST:

_____
Ashley Clark, Municipal Clerk

APPROVED AS TO FORM:

_____
Daniel Hughes

LEGEND:

POB		POINT OF BEGINNING
POC		POINT OF COMMENCEMENT
○	IPS	IRON PIN SET (5/8" REBAR)
○	IPF	IRON PIN FOUND
⟨LA⟩		LIMITED ACCESS
	C/L	CENTERLINE
	R/W	RIGHT-OF-WAY
	PP	POWER POLE
☆		LIGHT POLE
☆	LS	LIGHT STANDARD
⊡	EM	ELECTRIC METER
		1 HEAD LIGHT STANDARD
		2 HEAD LIGHT STANDARD
		3 HEAD LIGHT STANDARD
⋈		WATER VALVE
Ⓦ		WATER METER
		FIRE HYDRANT
Ⓦ	WMH	WATER MANHOLE
□	FDC	FIRE DEPARTMENT CONNECTION
Ⓢ	SDMH	STORM DRAIN MANHOLE
□	CB	CATCH BASIN
Ⓒ	CBMH	CATCH BASIN MANHOLE
□	CBDI	CATCH BASIN DROP INLET
	RCP	REINFORCED CONCRETE PIPE
	CMP	CORRUGATED METAL PIPE
	PVC	POLYVINYL CHLORIDE PIPE
	DIP	DUCTILE IRON PIPE
Ⓢ	SSMH	SANITARY SEWER MANHOLE
Ⓖ		GREASE MANHOLE
○	CO	CLEANOUT
	UGMRK	UNDERGROUND GAS MARKER
⋈	GV	GAS VALVE
○	GM	GAS METER
	TP	TELEPHONE POLE
⊡	UTMKR	UNDERGROUND TELEPHONE MARKER
⊡	TPED	TELEPHONE PEDESTAL
⊡	FOCMKR	FIBER OPTIC CABLE MARKER
●		GUARD POST
		SIGN
— OE —		OVERHEAD ELECTRIC LINE
— SS —		SANITARY SEWER LINE
— OT —		OVERHEAD TELEPHONE LINE
═══		STORM DRAIN PIPE
— X —		FENCE

CURVE TABLE

CURVE	RADIUS	LENGTH	TANGENT	CHORD	BEARING	DELTA
C1	280.81'	203.82'	106.63'	199.37'	N 06°52'54" E	41°35'10"
C2	3245.05'	207.73'	103.90'	207.69'	S 26°28'17" E	3°40'04"
C3	676.20'	145.16'	72.86'	144.89'	N 20°03'41" W	12°18'00"
C4	726.62'	224.14'	112.97'	223.25'	S 35°54'41" W	17°40'26"
C5	676.20'	136.88'	68.67'	136.65'	N 46°44'04" W	11°35'53"
C6	726.62'	135.42'	67.91'	135.22'	S 58°34'43" W	10°40'42"

LINE TABLE


LINE	LENGTH	BEARING
L1	4.83'	S 37°23'56" E
L2	15.40'	N 61°22'56" E
L3	43.90'	S 00°46'17" W
L4	59.97'	S 05°37'52" E
L5	65.81'	S 06°56'38" W
L6	65.59'	S 32°06'15" W
L7	103.93'	S 41°46'28" W
L9	57.91'	N 08°08'13" W
L10	50.00'	N 24°00'13" W
L11	50.00'	N 50°18'13" W
L12	30.33'	N 71°51'13" W
L13	2.50'	S 76°05'19" W
L14	81.66'	S 39°36'58" E
L15	34.04'	S 03°11'59" W
L16	62.68'	S 76°17'05" W
L17	18.84'	N 52°32'00" W
L18	95.61'	S 25°55'36" E
L19	11.13'	S 64°21'24" W
L20	35.53'	N 83°01'57" W
L21	26.53'	N 39°12'02" W
L22 TIE	79.34'	S 88°57'57" E
L23 TIE	18.74'	N 47°40'04" W

13.317 ACRE TRACT

Beginning at an iron pin located at the intersection of the eastern right of way of South Street (variable width right of way) and the transitional northern right of way of Fairview Road (90'R/W from C/L); thence with said eastern right of way N 52-32-00 W for 18.84 feet to an iron pin; thence along a curve concave to the northeast having a radius of 676.20 feet, an arc length of 136.88 feet and a chord bearing and distance of N 46-44-04 W for 136.65 feet to an iron pin; thence N 08-08-13 W for 57.91 feet to an iron pin; thence N 24-00-13 W for 50.00 feet to an iron pin; thence N 50-18-13 W for 50.00 feet to an iron pin; thence N 71-51-13 W for 30.33 feet to an iron pin; thence along a curve concave to the northeast having a radius of 676.20 feet, an arc length of 145.16 feet and a chord bearing and distance of N 20-03-41 W for 144.89 feet to an iron pin; thence N 13-54-41 W for 149.03 feet to a right of way monument; thence S 76-05-19 W for 2.50 feet to a right of way monument; thence N 13-54-41 W for 843.74 feet to an iron pin; thence along a curve concave to the east having a radius of 280.81 feet, an arc length of 203.82 feet and a chord bearing and distance of N 06-52-54 E for 199.37 feet to an iron pin; thence leaving said eastern right of way along the common line of Willis & Elledge (D.B. 1254 PG 789) SSH Marketing Group LLC (D.B. 2382 PG 3956) and Bright (D.B. 1906 PG 1218) respectively S 47-40-04 E for 365.77 feet to an iron pin; thence along the common line of said Bright S 37-23-56 E for 4.83 feet to an iron pin; thence along the common line of W & E Investments SC (D.B. 1474 PG 829) S 38-56-19 E for 307.31 feet to an iron pin; thence N 61-22-56 E for 15.40 feet to an iron pin; thence with the western right of way of South Main Street (33' R/W from C/L) along a curve concave to the northeast having a radius of 3245.05 feet, an arc length of 207.73 feet and a chord bearing and distance of S 26-28-17 E for 207.69 feet to an iron pin; thence S 28-17-54 E for 322.88 feet to an iron pin; thence S 00-46-17 W for 43.90 feet to a nail; thence S 05-37-52 E for 59.97 feet to a nail w/cap; thence S 06-56-38 W for 65.81 feet to a nail; thence S 32-06-15 W for 65.59 feet to a nail; thence S 41-46-28 W for 103.93 feet to an iron pin; thence S 39-36-58 E for 81.66 feet to an iron pin; thence with the transitional northern right of way of said Fairview Road S 03-11-59 W for 34.04 feet to an iron pin; thence with the northern right of way of said Fairview Road along a curve concave to the southeast having a radius of 726.62 feet, an arc length of 224.14 feet and a chord bearing and distance of S 35-54-41 W for 223.25 feet to an iron pin; thence with said transitional northern right of way of Fairview Road S 76-17-05 W for 62.68 feet to the Beginning containing 13.317 Acres (580,104 Sq. Ft.) more or less.

0.279 ACRE TRACT

Commencing at an iron pin located at the intersection of the eastern right of way of South Street (variable width right of way) and the transitional northern right of way of Fairview Road (90'R/W from C/L); thence with said eastern right of way N 52-32-00 W for 18.84 feet to an iron pin; thence along a curve concave to the northeast having a radius of 676.20 feet, an arc length of 136.88 feet and a chord bearing and distance of N 46-44-04 W for 136.65 feet to an iron pin; thence leaving said eastern right of way with the common line of Garrett Simpsonville Center LLC (D.B. 2007 PG 915) S 56-15-18 E for 30.80 feet to an iron pin; thence N 60-20-19 E for 78.24 feet to an iron pin; thence N 44-25-19 E for 232.21 feet to an iron pin; thence with a tie line S 88-57-57 E for 79.34 feet to an iron pin located along the southern right of way of South Main Street (33'R/W from C/L) and being the Point of Beginning; thence with said southern right of way N 44-50-15 E for 192.40 feet to an iron pin; thence along the western right of way of N/F The S.C.L. Railroad S 25-55-36 E for 95.61 feet to an iron pin; thence with the northern right of way of said Fairview Road S 64-21-24 W for 11.13 feet to an iron pin; thence along a curve concave to the south having a radius of 726.62 feet, an arc length of 135.42 feet and a chord bearing and distance of S 58-34-43 W for 135.22 feet to an iron pin; thence with the transitional right of way of said Fairview Road N 83-01-57 W for 35.53 feet to an iron pin; thence with the northeastern right of way of said South Main Street N 39-12-02 W for 26.53 feet to the Point of Beginning containing 0.279 Acres (12,169 Sq. Ft.) more or less.

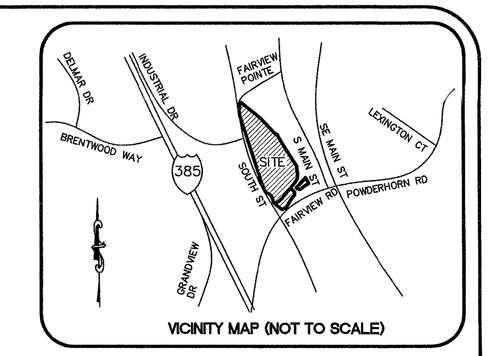

VICINITY MAP (NOT TO SCALE)

SURVEYOR'S NOTES:

1.) I HEREBY STATE THAT TO THE BEST OF MY KNOWLEDGE, INFORMATION, AND BELIEF, THE SURVEY SHOWN HEREON WAS MADE IN ACCORDANCE WITH THE REQUIREMENTS OF THE MINIMUM STANDARDS MANUAL FOR THE PRACTICE OF LAND SURVEYING IN THE STATE OF SOUTH CAROLINA, AND MEETS OR EXCEEDS THE REQUIREMENTS FOR A CLASS "A" SURVEY AS SPECIFIED THEREIN. THIS PROPERTY IS NOT LOCATED WITHIN A DESIGNATED FLOOD HAZARD AREA.

2.) SQUARE FOOTAGE AND DIMENSIONS OF STRUCTURE(S) ARE FOR INFORMATIONAL PURPOSES ONLY, NOT FOR SALE OR LEASE PURPOSES.

3.) ZONING PROVIDED BY THE APPROPRIATE GOVERNMENTAL AGENCY: TO BE USED FOR INFORMATIONAL PURPOSES ONLY.

4.)THE WORDS "CERTIFY", "CERTIFIES" OR "CERTIFICATION" AS USED HEREIN ARE UNDERSTOOD TO BE AN EXPRESSION OF PROFESSIONAL OPINION BY THE SURVEYOR, BASED UPON HIS BEST KNOWLEDGE, INFORMATION AND BELIEF, AS SUCH, DO NOT CONSTITUTE A GUARANTEE NOR A WARRANTY, EXPRESSED OR IMPLIED.

5.) THE UNDERGROUND UTILITIES SHOWN HEREON WERE TAKEN FROM PLANS PROVIDED BY THE UTILITY COMPANIES AND HAVE NOT BEEN FIELD MARKED BY LOCATOR SERVICES NOR FIELD VERIFIED BY THE SURVEYOR OTHER THAN VISUAL APPARATUS SUCH AS VALVES AND METERS. CONTRACTOR SHALL CALL LOCATOR SERVICE FOR VERIFICATION PRIOR TO ANY CONSTRUCTION OR EXCAVATION.

6.) ALL IPF/IPS ARE 5/8" REBAR UNLESS OTHERWISE NOTED.

TOTAL LAND AREA:
592,273 SQ.FT.
13.596 ACRES

BASIS OF BEARINGS AND BENCHMARK:

BASIS OF BEARINGS AND ELEVATIONS BASED ON GPS "RTK" OBSERVATION OF USGS MONUMENTS "GC018" AND "GC019"

NAD 83 - NAVD 88

FREELAND
SURVEYORS • ENGINEERS

FREELAND & ASSOCIATES, INC.
323 WEST STONE AVE.
GREENVILLE S.C. 29609
TEL. (864) 271-4924 FAX: (864) 233-0315
EMAIL: info@freeland-associates.com

DRAWN:	JMP PARTY CHIEF: BG CHECKED: JRF
REF. PLAT BOOK:	N/A
REF. DEED BOOK:	2007-915; 2232-180
TAX MAP :	323-1-1.2; 323-1-1.4
DATE OF SURVEY:	3-4-11
DATE DRAWN:	3-10-11
DRAWING NO:	63074-SP-A
DATE OF LAST REVISION:	

0' 60' 120' 180'

SCALE: 1" = 60'

SOUTH CAROLINA
FREELAND & ASSOCIATES, INC.
No. C00430
CERTIFICATE OF AUTHORIZATION

SOUTH CAROLINA
REGISTERED
PROFESSIONAL ENGINEER AND LAND SURVEYOR
No. 18781
RALPH FREELAND

PLS: JAMES R. FREELAND NO: 4781

11/17/11

THIS PLAT IS NOT A SUBDIVISION AS DEFINED BY THE GREENVILLE COUNTY LAND DEVELOPMENT REGULATIONS
1-17-19
Date
(Authorized Representative of Greenville County Planning Commission)

STATE OF SOUTH CAROLINA
GREENVILLE COUNTY
CITY OF SIMPSONVILLE

RECORD SURVEY FOR GARRETT SIMPSONVILLE CENTER, LLC

SITE ADDRESS:
FAIRVIEW ROAD
SIMPSONVILLE, SC

NOTICE:
PURSUANT TO THE PROVISIONS OF SC CODE OF LAWS, SECTION 40-22-270(3), THIS PLAN, SPECIFICATION, OR PLAT SHALL NOT BE FILED WITH PUBLIC AUTHORITIES WITHOUT THE SEAL, SIGNATURE AND DATE AFFIXED. FURTHERMORE, IF THIS PLAN, SPECIFICATION OR PLAT DOES NOT HAVE A SEAL THAT IS SIGNED AND DATED, IT SHALL NOT BE USED FOR ANY PURPOSE OTHER THAN A PRELIMINARY STUDY DRAWING AND WILL BE CONSIDERED A WORK IN PROGRESS.

2019004556
PLAT/LG Book: PL 1326 Page: 0060 - 0060 1 Pgs
January 17, 2019 02:38:47 PM
Rec: 810.00
FILED IN GREENVILLE COUNTY, SC

S:\LAND PROJECTS\As-built\As-Built-2011\63074-SP\dwg\63074-SP-A.dwg

City of Simpsonville – Submission of Agenda Item

(Due at 12 p.m. on the Tuesday prior to the meeting)

To: Ashley Clark, Clerk of Council

From: Tee Coker

Department: Administration

Date Submitted: 11/18/2025

Please include the following item on the agenda for:

☑ Committee of the Whole Meeting (4th Tuesday of the month) **Date:** 11/25/2025

☐ Business Meeting (2nd Tuesday of the month) **Date:**

Agenda Item Title: Ordinance to Approve a Trespass Enforcement Authorization Program

Summary of Item / Purpose:

This ordinance would authorize the creation of a program to allow the City to conduct trespass enforcement on private property. The program would be managed by the City Police Department. Enforcement would require written consent of the property owner as well as agreement by the City.

Action Requested of Council:

☐ Discussion Only

☑ First Reading

☐ Second Reading

☐ Approval / Vote

☐ Other:

Are supporting documents attached?

☑ Yes ☐ No

ORDINANCE NO. 2025-_____

AN ORDINANCE TO AMEND THE CODE OF ORDINANCES, CITY OF SIMPSONVILLE, SOUTH CAROLINA, TO ADOPT SECTION 26-71 TO PROVIDE FOR THE ESTABLISHMENT AND ADOPTION OF THE TRESPASS ENFORCEMENT AUTHORIZATION PROGRAM

WHEREAS, the City of Simpsonville finds that the public interest of the City requires careful balancing of the protection of individual constitutional protections with the fair, humane, and effective enforcement of regulations protecting use and enjoyment of private property rights, as well as the public health, safety, and welfare; and,

WHEREAS, the City of Simpsonville, based on these interests, finds it desirable and appropriate to adopt and implement the trespass enforcement authorization program to promote public safety through more efficient enforcement of the state trespass statute found in S.C. Code Ann. §16-11-620 and Section 26-67 of the Simpsonville Code of Ordinances (collectively, the "trespass statute").

NOW, THEREFORE, BE IT ORDAINED by the Mayor and Council of the City of Simpsonville to amend Article III (Offenses Against Property) of Chapter 26 (Offenses and Miscellaneous Provisions) by adding Section 26-71 (Trespass enforcement authorization program) as follows:

Section 1.

Sec. 26-71. Trespass enforcement authorization program.

(a) A property owner, building owner, property manager or person having legal control of property or their legal representative can authorize the City of Simpsonville Police Department to enforce, in absolute police discretion, the trespass statute on their property. To have the possibility of enforcement pursuant to this section, the person must:

(1) Appear in person at the law enforcement center or contact the police department for an application and affidavit for the trespass enforcement authorization program; and

(2) Declare the application and affidavit to be a public record for the purposes of Rule 803(8) South Carolina Rules of Evidence and/or appear in municipal court if subpoenaed.

(b) The application and affidavit must be notarized. After receipt of the sworn document, a site visit will be conducted by the police. The police will determine if the location is appropriate for participation and will determine the number and placement of signs provided by the city. The person will be informed if the location is not suitable for enforcement, due to excessive undergrowth or other factors. If the location is suitable or then made suitable, the owner/representative will be notified and the authorized signs may be purchased by the participant from the city and will be placed by the city. The notice of participation in the program will be provided to appropriate law enforcement divisions.

(c) It shall be unlawful for any person knowingly to enter or remain upon the premises of another when the consent to enter or remain is either absent, denied, or withdrawn by the owner, occupant, or person having lawful control thereof.

(d) When property has been posted by City of Simpsonville with conspicuous signage of sufficient notice declaring the property to under the trespass enforcement authorization program, it shall be prima facie evidence that consent to enter or remain upon the premises of another is absent, denied, or withdrawn. A "conspicuous" sign shall mean a sign that is at least one square foot in size. "Sufficient notice" shall mean the lettering on a conspicuous sign is at least one inch in height and contains the following language or words of similar notice:

NO TRESPASS AT ANY TIME (OR AS TIMES SET FORTH)
THIS IS PRIVATE PROPERTY UNDER TRESPASS ENFORCEMENT AUTHORIZATION PROGRAM CITY OF SIMPSONVILLE POLICE DEPARTMENT

(e) It shall be unlawful to deface, damage or remove any sign placed under authority of this section.

Section 2. Severability. The provisions of this Ordinance are hereby declared to be severable and if any section, phrase or provision shall for any reason be declared by a court of competent jurisdiction to be invalid or unenforceable, such declaration shall not affect the validity of the remainder of the sections, phrases and provisions hereunder.

Section 3. Suspension of Conflicting Ordinances, Rules, Orders or Resolutions. All ordinances, rules, orders, resolutions and parts thereof in conflict herewith are, to the extent of such conflict, hereby suspended for the duration of this ordinance.

Section 4. Savings Clause: Nothing in this ordinance hereby adopted shall be construed to affect any suit or proceeding in any court, or any rights acquired, or liability incurred, or any cause or causes of action acquired or existing, under any act or ordinance hereby repealed as stated in Section 2 of the ordinance; nor shall any just or legal right or remedy of any character be lost, impaired or affected by this ordinance.

Section 5. Effective Date of the Ordinance. This ordinance shall be effective immediately upon passage.

DONE in meeting duly assembled this ____ day of _____ 2025.

SIGNATURE OF MAYOR:

_____
Paul Shewmaker

ATTEST:

_____

Ashley Clark
City Clerk

APPROVED AS TO FORM:

_____

Daniel Hughes
City Attorney

First Reading: ** , 2025
Second Reading: ** , 2025

SIMPSONVILLE UNIFIED DEPARTMENTS REPORT

Committee of the Whole Meeting: Nov. 25, 2025

Final Report Assembled by: Justin Campbell, Community Relations Specialist

Date of Finalization: Nov. 21, 2025

EXECUTIVE SUMMARY:

In October 2025 departments of the City of Simpsonville continued advancing critical initiatives while navigating operational and workforce challenges.

The **Police Department** faced increasing staffing pressures, rising to 10 officer vacancies due to competitive pay in neighboring jurisdictions, prompting concern about long-term impacts on service levels.

The **Fire Department** saw a moderate rise in call volume from September, continuing a broader upward year-to-date trend; beyond emergency response, the department delivered extensive outreach and logged nearly 800 training hours, sustaining its emphasis on readiness and community safety.

The **Parks & Recreation Department** began transitioning facility reservations to an online platform, Evolve, and continued its assessment of park facility needs as part of an emerging master planning effort; the department also expanded youth theatre programming through a partnership with Sandy Young and continued recruitment for the Echoes Ensemble director.

The **Public Works Department** officially launched leaf season and completed multiple passes citywide, coordinated landscape warranty replacements with Union Grove, and represented the department at major community events, while promoting a current employee to Beautification Supervisor.

Community Relations advanced collaboration among the Golden Strip cities, started improvements to the Simpsonville Arts Center Website, and supported the continuation of the Meals on Wheels delivery partnership.

Collectively, these departmental efforts highlight Simpsonville's continued commitment to operational resilience, service improvement, and coordinated planning for the City's future.

Executive Summary: In October, the Fire Department maintained operational readiness by managing an increased call volume compared to September, with EMS responses continuing to represent the largest share of incidents. Fire and life safety outreach reached 8,328 community members, supporting public education through tours, prevention programs, health services, and business engagement. Personnel conducted 105 fire code inspections, identifying 23 violations and completing 14 corrections, along with additional residential detector and sprinkler checks. Training remained a departmental priority, with staff logging almost 800 hours across a wide range of specialties including EMT, rescue operations, apparatus skills, hazardous materials, and instructor development. Overall, call patterns, outreach activity, and training investments reflected sustained demand and the department's continued focus on preparedness and community safety.

Past Activities & Highlights:


- Responded to 464 calls, the majority of which were EMS and service assistance
- Resolved 14 fire code violations and conducted 105 fire code inspections
- Reached 8,000 residents (including 5,865 juveniles) through station tours, Fire Prevention Activities, puppet Shows and special events at various locations and businesses within the district, e.g. National Night Out
- Logged 796 hours of specialty training in EVDT, EMT, paramedic, and others
- Participated in National Night Out with touch-a-truck, public education materials, and car-seat installation.

Upcoming Events & Projects:

- Continue can collection and sponsorships to raise money for the S. C. Burned Children's Fund.
- Plan and participate in programs related to Fire Safe designation from OSFM.
- Focus on follow-up inspections to resolve all fire code violations by end of calendar year.
- Continue plans and implementation of community outreach program.
- Car Seat Safety Check Event on Dec. 5
- Christmas Parade on Dec. 7

Issues to Monitor: None at this time

Proposals & Recommendations: Simpsonville Fire Department will participate in City Christmas parade as well as in many subdivisions during the Christmas season to continue to build a positive relationship with the community and it's residents.

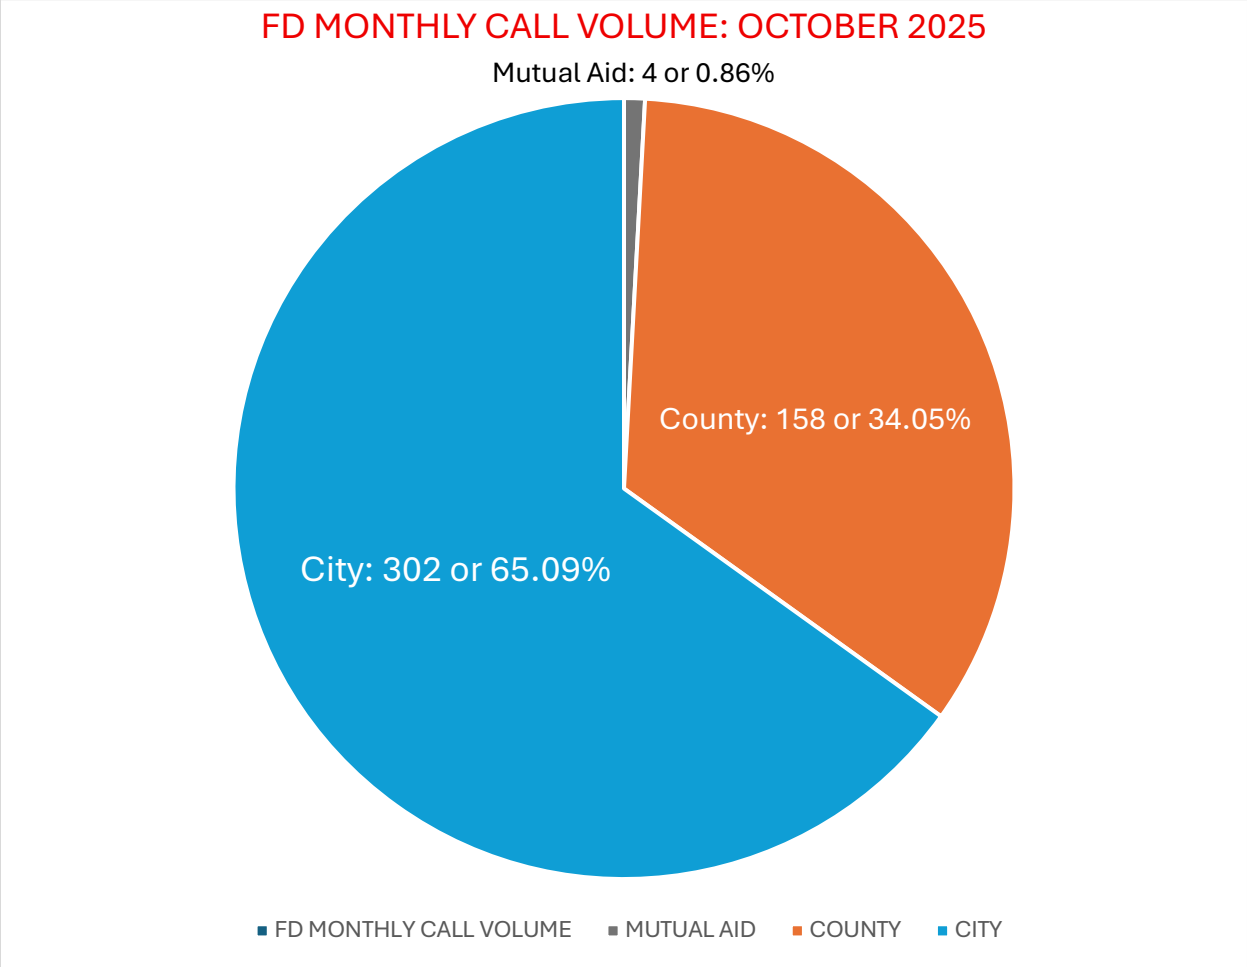
FD MONTHLY CALL VOLUME: OCTOBER 2025
Mutual Aid: 4 or 0.86%
County: 158 or 34.05%
City: 302 or 65.09%
FD MONTHLY CALL VOLUME
MUTUAL AID
COUNTY
CITY

Executive Summary: The Police Department now has 10 open positions for police officers. Three officers ended their employment to accept positions at other agencies for higher compensation. The tenth open position was vacated by an officer who just turned in his resignation as of the time of filing this report on Nov. 17, making the departure technically a November resignation. Staffing continues to be a concern.

Past Activities & Highlights:


- We participated in several concerts this month: the Suicide Boys, Pierce the Veil, and the Greenville Country Music festival.
- We participated in Halloween at Heritage Park and an event at Legacy Reserves at Fairview Park.
- We hosted tours of our facilities for local students.
- Command staff took time out to cook for our employees on two separate evenings to promote morale and show appreciation for their hard work and dedication.

Upcoming Events & Projects:

- Our open house recruitment event is coming up soon.
- The new Live Scan/fingerprint machine is scheduled to be installed.
- We are working with city staff to come up with solutions that will help address the feral cat problem.
- Stuff-a-Cruiser Toy Drive Nov. 22, Nov. 29, Dec. 6, Dec. 13

Issues to Monitor: Staffing is the main concern. Addressing compensation and how it relates to current staffing issues must be prioritized.

Proposals & Recommendations: As alluded to by Mayor Shewmaker and several Council members in the last October Committee of the Whole meeting, I strongly recommend placing compensation in a higher tier in comparison with other agencies instead of playing "catchup" with those agencies. Not only is competing for candidates is important; putting the Simpsonville Police Department as an organization in a position to attract candidates of the highest level available is important to continue providing a higher quality of public safety to our community and citizens.

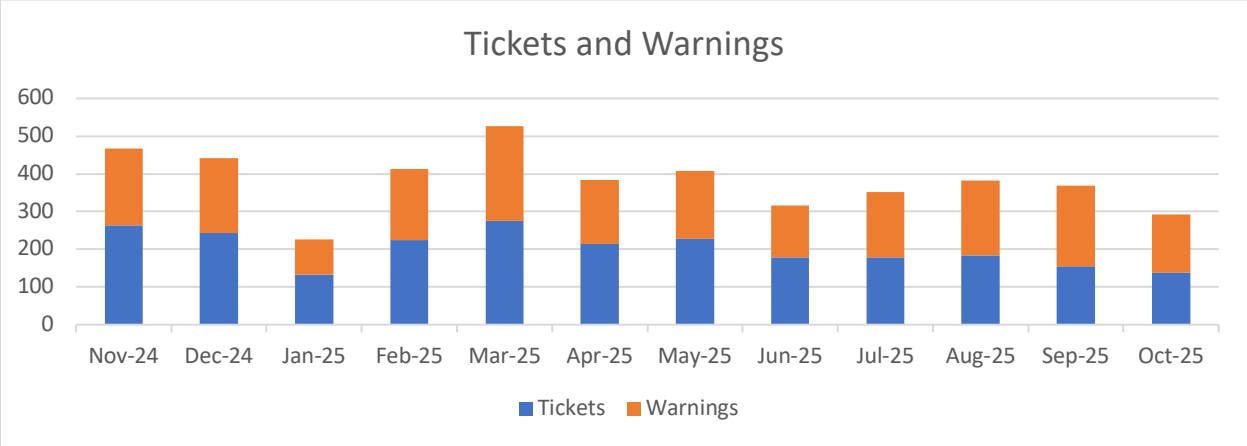

Executive Summary: An initial Zoom meeting with Evolve programmers began the process to move our facilities (shelters, rental rooms, etc.) to an online process. The assessment of park facility needs, both immediate and future, to address updates, upgrades, and additions has begun and is ongoing. Parks & Rec is working toward the end-goal of creating an extensive master plan for park facilities and related needs for our community. The department has a handshake agreement with Sandy Young to provide additional youth theatre programming at the Arts Center to include youth theatre camps and performances. Additionally, the search for a director for the special needs theater group Echoes Ensemble is underway with a goal of program start in spring/summer 2026.

Past Activities & Highlights:

- **Athletics -** Our Fall sports programs wrapped in October for Tackle Football, Cheer, Flag Football boys and girls, Volleyball, Baseball and Softball - 128 teams total.
- **Arts Center -** Art Exhibition - Cameron Keriazakos Sept. 16 – Nov. 12 - Camp Craft studio opens. “Aladdin Jr.” – Nov. 14 – Nov. 22 - Arts Center - presented by World Upside Down Theatre
- **Facilities -** Repaired Lighting fixtures on Fairview Rd Bridge, Ceiling Fans installed at Market Pavillion, New light control box for welcome sign Harrison Bridge Rd.
- **Grounds -** Installed new Flag Pole system at College Park, prep for HP concourse beautification project, Preparations for site tour at Amphitheatre for RFP.
- **Senior Program/Activity Center -** Trip to Flat Rock Playhouse, City Scape Winery. 1161 participated in exercise classes.
- **Amphitheatre and Special Events -** Greenville Country Music Festival, Pierce the Veil, Halloween at Heritage Park

Upcoming Events & Projects:

- Art Exhibition - Rebecca Splawn Nov. 13 – Jan. 6 with reception Dec. 5 at 5 - 7 p.m.
- “It's A Ha Ha Hallelujah Christmas II” – Nov. 28 – Nov. 30 - presented by No Dreams Deferred
- Youth Basketball CO-ED and Girls leagues begin practice and games November and December

Issues to Monitor: Athletics staffing is short two coordinator positions after reorganization in the last year.

Proposals & Recommendations: Continuing to work toward and on a master plan for Parks & Rec and our community

Simpsonville
SIMPLY ATHLETICS.

2025 Calendar Year YTD Participation Unit Totals

Through October 2025	Players	Volunteer Coaches
Spring Baseball (March-June)	619	55
Spring Softball (March-June)	105	15
Spring Flag Football (March-June)	263	36
Spring Volleyball (March-June)	388	52
Summer 3on3 Basketball (June-August)	57	12
Cheerleading (May-November)	30	6
Tackle Football (June-November)	79	15
Fall Baseball (August-November)	398	47
Fall Softball (August-November)	84	9
Fall Flag Football (August-November)	232	36
Girls Fall Flag Football (August-November)	58	12
Fall Volleyball (August-November)	315	38
Winter GIRLS 5on5 Basketball(December-February)	47	9
Winter 5on5 Basketball (December-February)	157	18

Total Participation Units	*2832*	*360*

Executive Summary: The official start to leaf season was Oct. 1. Drivers were able to complete the route through town multiple times. Staff met with landscape contractor Union Grove to walk through the municipal complex and identify plants in need of replacement during the warranty period. Public Works employees honored their commitment to community engagement by attending the National Night Out's "Touch-a-Truck" event and Halloween at Heritage Park. These events allow staff to educate the public on the vital role Public Works plays in establishing quality of life for those we serve.

Past Activities & Highlights:

- Continued work on the Sewer Rehab project to reduce I&I in our sewer system
- Staff attended the SCAWPA Chapter meeting with the goal of getting more involved regionally which will make us better as a department.
- Began work in updating the Emergency Operations Plan with Administrator Coke, Chief Nichols, Chief Hanshaw, and Greenville County EMD

Upcoming Events & Projects:

- Community engagement
    - Christmas Parade
    - Meals on Wheels – new monthly route
    - Visits from schools in partnership with Police and Fire departments
- Progress meeting with CHA staff to discuss areas of concern with sewer rehab
- Submission of our annual stormwater report to Greenville County LDD

Issues to Monitor: Our biggest challenge is maintaining quality efficient services while competing with the rising prices of goods and competitive wages offered by other cities.

Proposals & Recommendations: We expect to onboard a new sewer supervisor in November that was created in the FY 25/26 budget. Currently this division is combined with the Streets Division. Staff has begun looking at capital and staffing needs for FY 26/27.

Annual Report 2025-2026: Fleet Division – CLICK HERE

Executive Summary: Departments began their new monthly routes for delivery meals for Meals on Wheels in October, furthering the City's partnership with the organization to give back to the Simpsonville community. The Community Relations Specialist met with counterparts from the cities of Fountain Inn and Mauldin to get more acquainted and discuss the potential for future collaboration and coordination, e.g. ensuring the Independence Day celebrations in the Golden Strip are held on three different nights to avoid unnecessary competition. In partnership with Cultural Arts & Events Director Lisa Everidge, Mr. Campbell initiated an update to the Simpsonville Arts Center website that includes the addition of a webpage for Academy Hall. Mr. Campbell attended the annual Communications Workshop by the Municipal Association of South Carolina at which he received valuable information about the value of "over" communicating with the public during disasters and the need to start considering A.I. as it relates to local government.

Past Activities & Highlights:

- Delivery of new Meals on Wheels routes began
- Lunch with Golden Strip counterparts
- Attended Communications workshop by MASC
- Attended emergency operations meeting

Upcoming Events & Projects:

- Bell ringing for The Salvation Army
- Annual Tree Lighting Ceremony on Dec. 5
- Hometown Legislative Action Day Dinner on Jan. 20

Issues to Monitor: None at this time

Proposals & Recommendations: None at this time